

**Order No.:** 51WC10MA32AS | **GTIN (EAN):** 4058352616918


**Product description:** Rond31,2450lm830,ML,PC,sens,wh



Rondel 31, wall and ceiling luminaire, primary optical cover: cover, of PC, opal, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 2.450lm, luminous efficacy: 120lm/W, light colour: 830, colour temperature: 3000K, with terminal, 3-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50/60Hz, rated input power: 20.5W, luminaire housing, of PC, traffic white (RAL 9016), diameter: 350mm, brightness and presence sensor, HF sensor, protection rating (complete): IP65, insulation class (complete): insulation class II (safety insulation), certification: CE, impact resistance: IK10, permissible operating ambient temperature: -20..+40°C, permissible storage temperature: -20..+60°C, packaging unit: 1 piece

IP 65 IK 10  

Lamps:	LED
Wt. (kg):	1.9
GTIN (EAN):	4058352616918



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 13.10.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51WC10MA32AS | **GTIN (EAN):** 4058352616918

**Detailed technical description:** Rondel31,2450lm830,ML,PC,sens,wh



#### Key data

- Product type: wall and ceiling luminaire
- Product name: Rondel 31
- Order No.: 51WC10MA32AS

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Cover: cover, opal
- Beam angle: extremely wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 25$
- UGR viewing direction along lateral luminaire axis:  $\leq 25$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 2450lm
- Luminous efficacy: 120lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI  $> 80$
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 4$  SDCM (initial)
- Rated input power: 20.5W
- Supplement: luminous flux adjustable on luminaire in four steps (1800/2040/2280/2450lm), connected load according to luminous flux setting (15/17/19/20.4W)

#### Operating device:

- Control: ON/OFF Multilumen

#### Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK10
- Temperature range (operation): -20...+40°C
- Certification, designation: CE

#### Material, Colour

- luminaire housing: PC, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: cover of PC

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall

#### Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220...240V, 50/60Hz, AC

#### Dimensions, Weight


- Diameter: 350mm
- Weight: 1.9kg

#### Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

**Order No.:** 51WC10MA32AS | **GTIN (EAN):** 4058352616918

**Dimensions:** Rond31,2450lm830,ML,PC,sens,wh

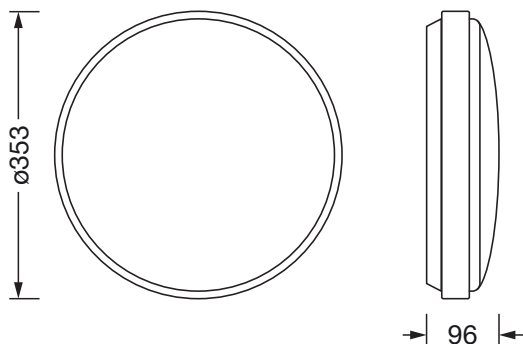

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 13.10.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -