


Order No.: 5LZ930206 | **GTIN (EAN):** 4058352385999


Product description: SCon11,K-BusCoupl

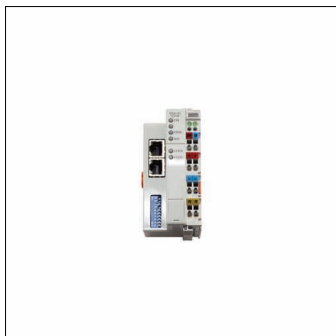

SITECO Connect 11K-Bus coupler, central control - connection to lighting or building management, installation type: recessed, installation location: in an electrical distributor, protection rating (complete): IP20, certification: CE, voltage: 24V, voltage type: DC, 1 x K-Bus, packaging unit: 1 piece

IP 20 

Wt. (kg): 0.1
GTIN (EAN): 4058352385999




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ930206 | **GTIN (EAN):** 4058352385999

Detailed technical description: SCon11,K-BusCoupl



Key data

- System family: Siteco Connect 11
- Product type: control unit
- Product name: SITECO Connect 11
- Order No.: 5LZ930206

Certificates, Standards

- Protection rating: IP20
- Temperature range (operation): -25...+60°C
- Certification, designation: CE

Material, Colour

- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in an electrical distributor

Electrical connection

- Nominal voltage: 24V, DC

Dimensions, Weight

- Length: 100mm
- Width: 44mm
- Height: 68mm
- Weight: 0.1kg


Inputs

1x K-Bus

- Option: system current max. 500mA

Order No.: 5LZ930206 | **GTIN (EAN):** 4058352385999

Dimensions: SCon11,K-BusCoupl

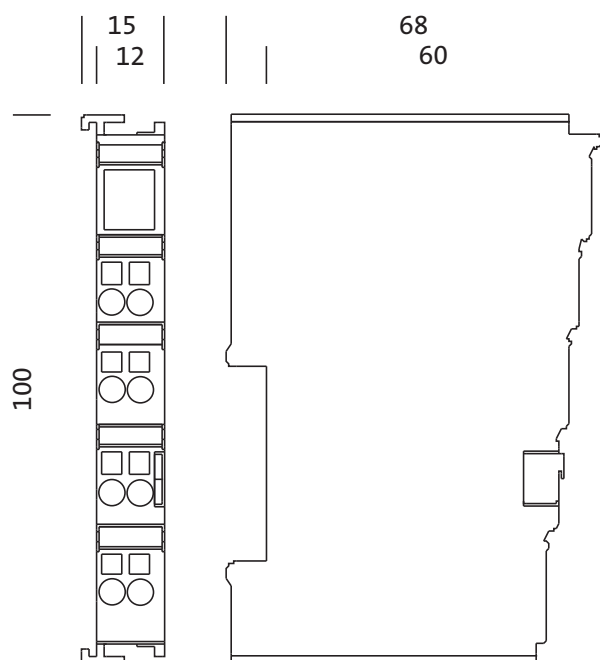

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -