

**Order No.:** 5EA40EHC01 | **GTIN (EAN):** 4058352641323

**Product description:** SConWi,SmartPlugCelMotHigh



SITECO Connect WirelessSmart Plug Cellular Motion High, sensor, communication: local mesh radio network, EGPRS, NB-IoT NB2, LTE Cat M1, 5G, 4G, 2G, 2.4GHz, D4i type A, control: remote setup and operation, local setting and operation with USB stick, local setting and operation with smartphone app, manual, by time, by timer, by weekday, by AstroDim calendar, by daylight, by movement, via API, with radio clock, optionally via radio push button, sensor technology: 1 PIR movement sensor, daylight sensor, temperature sensor, inclination sensor, GPS, GNSS, GLONASS, GALILEO, The usage fees for remote access via web application and mobile communications (LTE CAT M1 / NB IoT NB2 / EGPRS) are included in the scope of delivery with a term of 5 years. This individually extendable runtime starts when the device QR code is scanned into a system, Smart Interface below, Logarithmic DALI dimming curve preset. Can be switched to linear via software, installation type: screw fastening, installation location: to the luminaire, of plastic, voltage: 24V, voltage type: DC, PIR movement sensor, protection rating (complete): IP66, certification: CE, packaging unit: 1 piece

IP 66 

Wt. (kg): 0.1  
GTIN (EAN): 4058352641323

**Order No.:** 5EA40EHC01 | **GTIN (EAN):** 4058352641323

**Detailed technical description:** SConWi,SmartPlugCelMotHigh



## Key data

- System family: SITECO Connect 31 Wireless
- Product type: sensor
- Product name: SITECO Connect Wireless
- Order No.: 5EA40EHC01

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: D4i, Smart Interface below, The usage fees for remote access via web application and mobile communications (LTE CAT M1 / NB IoT NB2 / EGPRS) are included in the scope of delivery with a term of 5 years. This individually extendable runtime starts when the device QR code is scanned into a system, Logarithmic DALI dimming curve preset. Can be switched to linear via software

#### Certificates, Standards

- Protection rating: IP66
- Temperature range (operation): - 40..+85°C
- Standard: according to Zhaga book 18
- Certification, designation: CE

#### Material, Colour

- housing: plastic, transparent, colour-backed, transparent
- Colour specification: transparent

#### Mounting

- Mounting method, mounting location: screw fastening, to the luminaire
- Mounting height: 6..12m

#### Electrical connection

- Nominal voltage: 24V, DC

#### Dimensions, Weight

- Weight: 0.1kg


#### Inputs

#### PIR movement sensor

- Detection range: max. ø18m

Order No.: 5EA40EHC01 | GTIN (EAN): 4058352641323  
Dimensions: SConWi,SmartPlugCelMotHigh

Detection zone "Smart Plug Cellular Motion High"  
5EA40EHC01

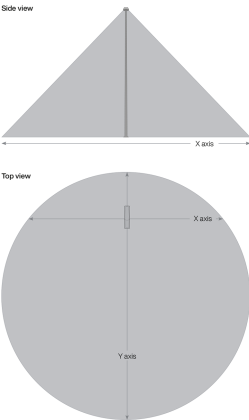

Mounting height	X axis	Y axis
7.0 m	11.9 m	12.4 m
8.0 m	13.6 m	14.2 m
9.0 m	15.3 m	15.9 m
10.0 m	17.0 m	17.7 m