


### Order No.: 5XA54000XSA | GTIN (EAN): 4058352161326 Product description: Mod540,or,str,spr.el,struct,1pc




spreader element, for Module 540, spreader element, structured, wide distribution, orange, strongly tinting, spreader element orange, strongly tinted to reduce the colour temperature from 4000K to approx. 2200K or from 3000K to approx. 1900K, mains connection: 230..240V, packaging unit: 1 piece

Wt. (kg): 0.2 GTIN (EAN): 4058352161326

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 17.02.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

# ѕітесо

## Order No.: 5XA54000XSA | GTIN (EAN): 4058352161326 Detailed technical description: Mod540,or,str,spr.el,struct,1pc

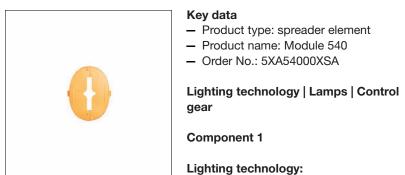

- Glare reduction: spreader element, structured
- Beam angle: wide distribution

#### Mounting

 Mounting method, mounting location: slip-in mounting, in the luminaire

#### **Electrical connection**

- Nominal voltage: 230..240V

#### **Dimensions, Weight**

- Weight: 0.2kg

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 17.02.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -