

Order No.: 51HL62D24HCA | GTIN (EAN): 4058352348932


Product description: HB11,wd,20050lm840,DA



Highbay 11, LED high bay luminaire, primary light control with lens, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, suspended mounting, for 2x 2x LED, rated luminous flux: 20.050lm, luminous efficacy: 180lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with terminal, 5-pole, max. 2.5mm<sup>2</sup>, mains connection: 230..240V, AC, 50/60Hz, rated input power: 111W, LED unit, of diecast aluminium, coated, metallic grey (RAL 9006), length: 940mm, width: 500mm, height: 65mm, housing, of diecast aluminium, coated, metallic grey (RAL 9006), protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D, impact resistance: IK08 with glass or PC cover, permissible operating ambient temperature: -35..+70°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, packaging unit: 1 piece



Lamps:	2x 2x LED
Wt. (kg):	8.8
GTIN (EAN):	4058352348932



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 27.10.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51HL62D24HCA | GTIN (EAN): 4058352348932

Detailed technical description: HB11,wd,20050lm840,DA



### Key data

- Product type: LED high bay luminaire
- Product name: Highbay 11
- Order No.: 51HL62D24HCA

### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 22$
- UGR viewing direction along lateral luminaire axis:  $\leq 22$

#### Lamps:

- Lamps: with 2x 2x LED
- Rated luminous flux: 20050lm
- Luminous efficacy: 180lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 111W

#### Operating device:

- Control gear: ECG DALI
- Control: DALI (2 addresses)

#### Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK08 with glass or PC cover
- Protection symbol: D
- Temperature range (operation): -35..+70°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Certification, designation: CE, ENEC, VDE, UKCA

### Material, Colour

- LED unit: diecast aluminium, coated, metallic grey (RAL 9006)
- Quantity: 4 piece
- Colour specification: metallic grey (RAL 9006)
- housing: diecast aluminium, coated, metallic grey (RAL 9006)
- Quantity: 1 piece
- Colour specification: metallic grey (RAL 9006)

### Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to wire, to the ceiling, to the chain
- Mounting height: 6..20m
- Arrangement: single arrangement
- Supplement: only suitable for indoor use, mounting accessories required, please order separately

### Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 230..240V, 50/60Hz, AC

### Dimensions, Weight


- Length: 940mm
- Width: 500mm
- Height: 65mm
- Weight: 8.8kg

### Service life

- Rated service life: 50000h (L80/B10) at AT = 25°C, 70000h (L90/B50) at AT = 25°C, 50000h (L90/B50) at AT = ta max

Order No.: 51HL62D24HCA | GTIN (EAN): 4058352348932

Dimensions: HB11,wd,20050Im840,DA

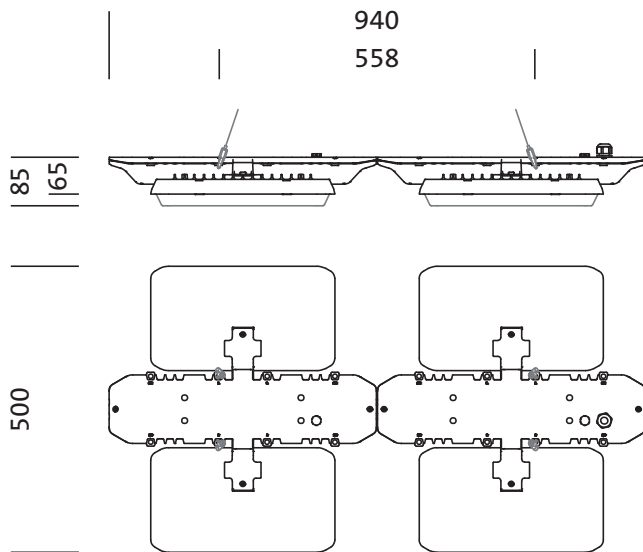

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 27.10.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51HL62D24HCA | GTIN (EAN): 4058352348932


Planning data: HB11,wd,20050lm840,DA

## 51HL62D24HCA: 1x LED

4058352348932

51HL62D24HCA

LED 4000 K | CRI ≥ 80  $\phi_N$  20050 lm



$\phi_{\downarrow}$  100%  $\phi_{\uparrow}$  0%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	2105	3543
L <sub>70</sub>	7919	8577
L <sub>65</sub>	8158	7791

UGR 19.7 19.6


X 4H Y 8H  $\rho$  70/50/20 S 0.25H

## 51HL62D24HCA + 59HL91001: 1x LED

4058352348932 + 4058352323519

51HL62D24HCA + 59HL91001

LED 4000 K | CRI ≥ 80  $\phi_N$  19120 lm



$\phi_{\downarrow}$  100%  $\phi_{\uparrow}$  0%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	1494	2230
L <sub>70</sub>	6852	7254
L <sub>65</sub>	7559	7225

UGR 19.7 19.5

X 4H Y 8H  $\rho$  70/50/20 S 0.25H