

Order No.: 56TL6MDSPC3A | **GTIN (EAN):** 4058352407653

Product description: Licens,PIR-sens



Licross®sensor module PC3-S, slave, central control - connection to lighting or building management, dimmable, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, 1 x PIR movement sensor, 1 x light sensor, 1 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.3
GTIN (EAN): 4058352407653

Order No.: 56TL6MDSPC3A | **GTIN (EAN):** 4058352407653

Detailed technical description: Licsens,PIR-sens



Key data

- System family: Siteco Connect 11, SITECO Connect 22
- Product type: sensor
- Product name: Licross®
- Order No.: 56TL6MDSPC3A

Outputs

1x DALI-2

- Feature: DALI, slave function, DALI current max. 6mA

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: internal wiring halogen-free

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE, UKCA

Material, Colour

- sensor module: sheet steel, coil coated, silver
- Colour specification: silver

Mounting

- Mounting height: 2.5..5m
- Supplement: only suitable for use in indoor areas

Dimensions, Weight

- Length: 300mm
- Width: 66mm
- Height: 71mm
- Weight: 0.3kg

Inputs

1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection range: tangential max. 4x5m
- Detection range: max. 2x 2m

1x light sensor

- Illuminance: 2..1000lx


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 56TL6MDSPC3A | GTIN (EAN): 4058352407653

Dimensions: Licsens,PIR-sens

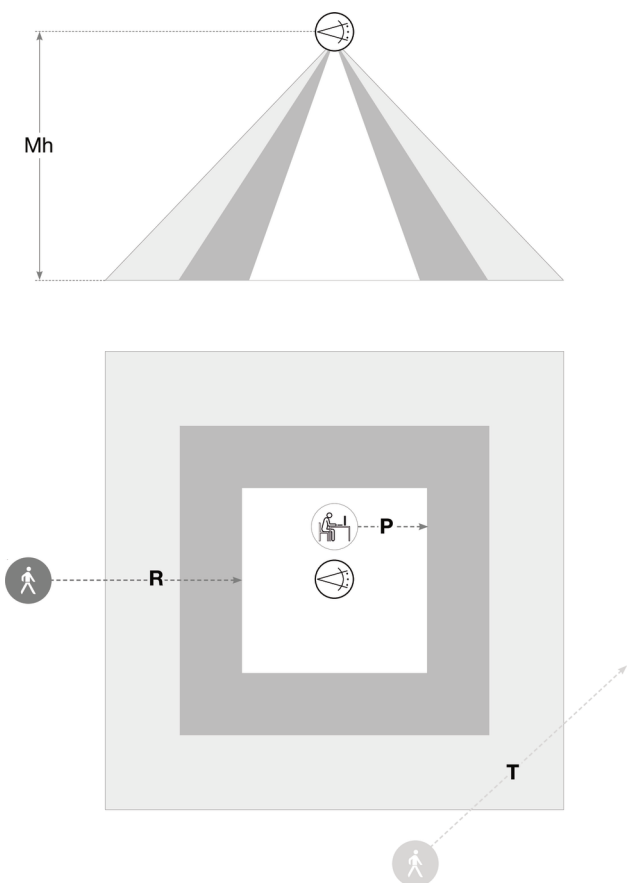

Sensor PS3

Mh	R	T	P
2,8m	4x4m	ca. 4x5m	ca. 2x2m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -