

**Order No.:** 59US1HXSPC5A | **GTIN (EAN):** 4058352363942


**Product description:** SConsens,PIR-sens,SI



SITECO ConnectSensor-Head PC5-S, slave, local control - self-sufficient standalone sensors, central control - connection to lighting or building management, dimmable, installation type: slip-in mounting, installation location: on interface, of plastic, protection rating (complete): IP54, certification: CE, VDE, 1 x PIR movement sensor, 1 x light sensor, packaging unit: 1 piece



Wt. (kg): 0.1  
GTIN (EAN): 4058352363942



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 59US1HXSPC5A | **GTIN (EAN):** 4058352363942

**Detailed technical description:** SConsens,PIR-sens,SI



## Key data

- System family: Siteco Connect 11, DALI-2, SITECO Connect, SITECO Connect 22
- Product type: sensor
- Product name: SITECO Connect
- Order No.: 59US1HXSPC5A

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: DALI 2, dimmable

#### Certificates, Standards

- Protection rating: IP54
- Temperature range (operation): -20..+50°C
- Certification, designation: CE, VDE

#### Material, Colour

- housing: plastic, white
- Colour specification: white

#### Mounting

- Mounting method, mounting location: slip-in mounting, on interface
- Mounting height: 4..14m

#### Dimensions, Weight

- Length: 95mm
- Width: 95mm
- Height: 65mm
- Weight: 0.1kg

#### Inputs

##### 1x PIR movement sensor


- Connection: system connector
- Detection range: tangential max. ø36m
- Option: 11 detection levels, 1416 switching zones
- Feature: circular detection area

##### 1x light sensor

- Feature: light sensor with 'local control' without function

Order No.: 59US1HXSPC5A | GTIN (EAN): 4058352363942

Dimensions: SConsens,PIR-sens,SI

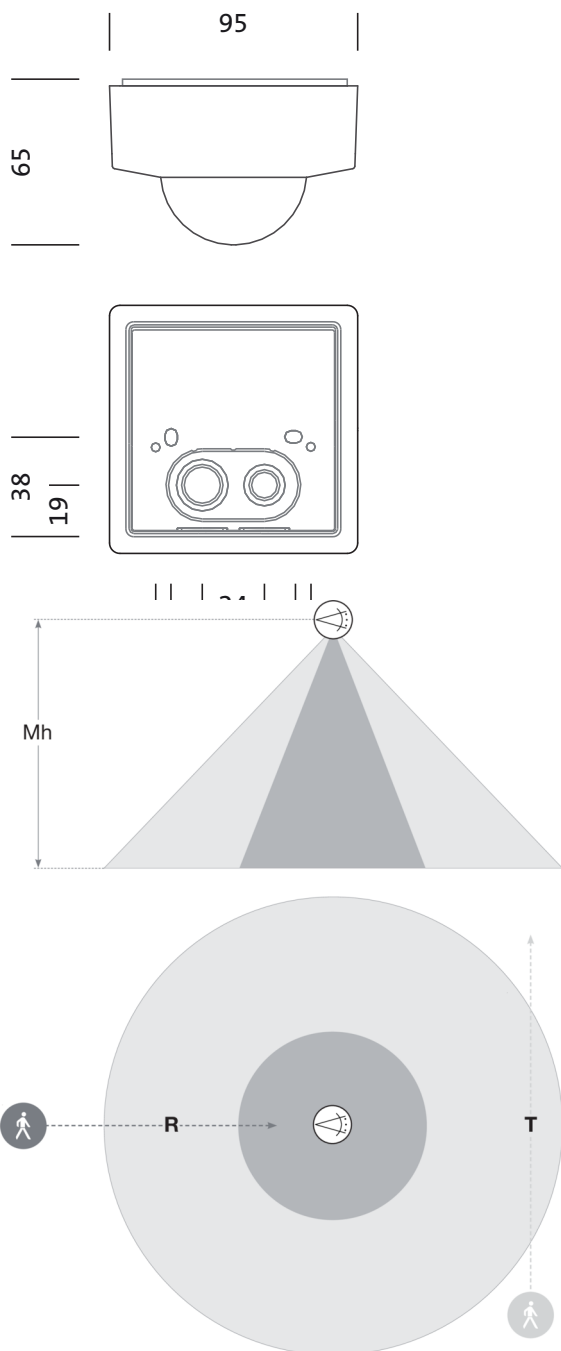

## Sensor Head PC5

Mh	R	T
14m	ø = 16,3m	ø = 40m
12m	ø = 16,3m	ø = 40m
10m	ø = 15,6m	ø = 40m
8m	ø = 14,3m	ø = 40m
6m	ø = 12,0m	ø = 40m
4m	ø = 10,0m	ø = 40m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -