

Order No.: 51TR1CE | GTIN (EAN): 4058352241905 Product description: Lic,trunk.rail,L1500,14x2.5²,wh



Licross[®], trunking rail, of sheet steel, galvanised, coil coated, white, length: 1.500 mm, width: 64 mm, height: 67mm, through-wiring: 14x 2.5mm², protection rating (complete): maximum IP64, depends on used inserts and accessories, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, LABS conformity tested according to VDMA 24364:2018-05, packaging unit: 1 piece

⊕ (€

Wt. (kg): 2.8 GTIN (EAN): 4058352241905



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

ѕітесо

Order No.: 51TR1CE | GTIN (EAN): 4058352241905 Detailed technical description: Lic,trunk.rail,L1500,14x2.5²,wh



Key data

- Product type: trunking components group (TS)
- Product name: Licross[®]
- Order No.: 51TR1CE

Lighting technology | Lamps | Control gear

Component 1

Lamps:

 Supplement: internal wiring halogenfree

Certificates, Standards

- Protection rating: maximum IP64, depends on used inserts and accessories
- Insulation class: insulation class I (protective earthing)
- Supplement: LABS conformity tested according to VDMA 24364:2018-05
- Certification, designation: CE, UKCA

Material, Colour

- trunking rail: sheet steel, galvanised, coil coated, white
- Colour specification: white

Mounting

- Mounting method, mounting location: suspended mounting, surfacemounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection


- Through-wiring: 14x 2.5mm²

Dimensions, Weight

- Length: 1500mm
- Width: 64mm
- Height: 67mm
- Weight: 2.8kg



Order No.: 51TR1CE | **GTIN (EAN):** 4058352241905 **Dimensions:** Lic,trunk.rail,L1500,14x2.5²,wh

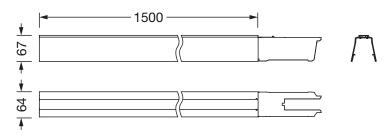

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -