

Order No.: 56TL1FCSA | **GTIN (EAN):** 4058352373880


Product description: LicIntsens



Licross® InterfaceInterface S, slave, local control - self-sufficient standalone sensors, central control - connection to lighting or building management, dimmable, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, 1 x DALI-2, packaging unit: 1 piece



Wt. (kg): 0.8
GTIN (EAN): 4058352373880

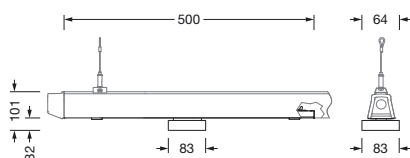

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 56TL1FCSA | **GTIN (EAN):** 4058352373880

Detailed technical description: LicIntsens



Key data

- System family: Siteco Connect 11, SITECO Connect 21
- Product type: sensor
- Product name: Licross® Interface
- Order No.: 56TL1FCSA

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: internal wiring halogen-free

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): -20...+50°C
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- trunking rail adapter set: sheet steel, coil coated, white
- Colour specification: white

Mounting

- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 5-pole, with phase selection

Dimensions, Weight

- Length: 500mm
- Width: 96mm
- Height: 97mm
- Weight: 0.8kg


Outputs

DALI-2

- Feature: DALI, slave function, DALI current max. 6mA

Order No.: 56TL1FCSA | **GTIN (EAN):** 4058352373880

Dimensions: Liclntsens

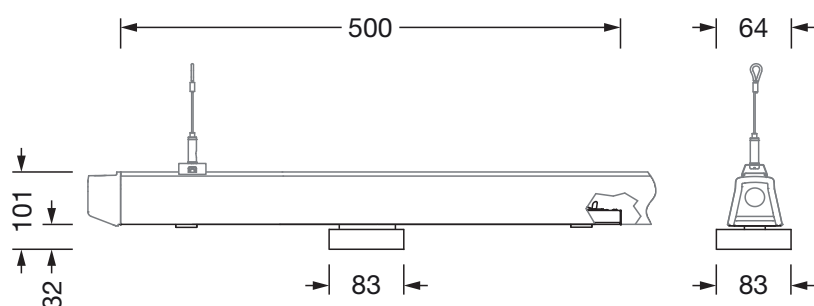

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -