


Order No.: 5TR10350Q | **GTIN (EAN):** 4039806496362


Product description: Mod, trunk.rail, 3lg, L4485, 5x2.5², wh



Modario®, trunking rail, of sheet steel, coated, pure white, 3-length, length: 4.485 mm, width: 58 mm, height: 43mm, through-wiring: 5x 2.5mm², with terminal, 5-pole, max. 2.5mm², protection rating (complete): for IP20/IP40 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece



Wt. (kg): 5.7
GTIN (EAN): 4039806496362

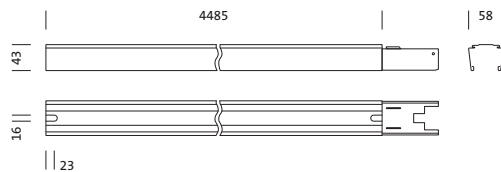


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5TR10350Q | **GTIN (EAN):** 4039806496362

Detailed technical description: Mod,trunk.rail,3lg,L4485,5x2.5²,wh



Key data

- Product type: trunking components group (TS)
- Product name: Modario®
- Order No.: 5TR10350Q

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: for electrical and mechanical plug and socket connection of rail elements

Certificates, Standards

- Protection rating: for IP20/IP40 protection rating
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

Material, Colour

- trunking rail: sheet steel, coated, pure white, 3-length
- Colour specification: pure white

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm²
- Through-wiring: 5x 2.5mm²

Dimensions, Weight

- System units: 15x SE
- Length: 4485mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 5.7kg


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5TR10350Q | **GTIN (EAN):** 4039806496362

Dimensions: Mod,trunk.rail,3lg,L4485,5x2.5²,wh

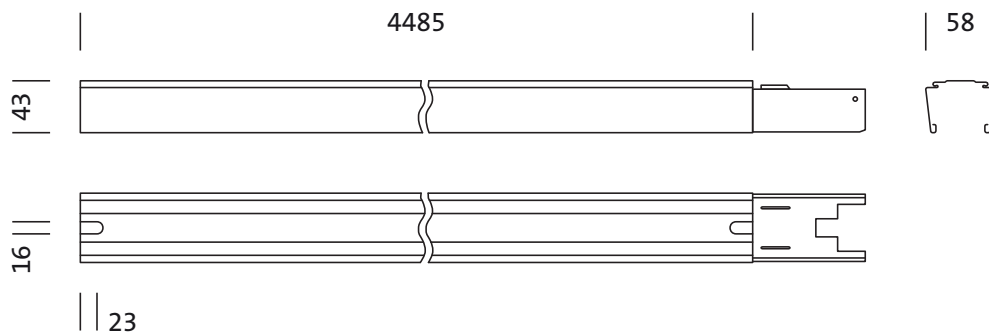

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com