

Order No.: 5CL444603 | **GTIN (EAN):** 4058352521526


Product description: CL31Bollard90,1500lm830,DA



CL 31 Bollard 90, bollard luminaire, primary light control with lens, of PC, primary optical cover: cover panel, of PC, transparent, secondary light control with reflector, of PC, primary light characteristic: asymmetric, LED, rated luminous flux: 1.500lm, luminous efficacy: 107lm/W, light colour: 830, colour temperature: 3000K, control gear: DALI, with terminal, 5-pole, max. 2.5mm², mains connection: 220..240V, AC, 50/60Hz, rated input power: 14W, luminaire housing, of aluminium, powder-coated, Siteco® metallic grey, diameter: 170mm, height: 900mm, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, impact resistance: IK10, permissible operating ambient temperature for outdoor applications: -20..+50°C, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	7.0
GTIN (EAN):	4058352521526



Order No.: 5CL444603 | **GTIN (EAN):** 4058352521526

Detailed technical description: CL31Bollard90,1500lm830,DA



Key data

- Product type: bollard luminaire
- Product name: CL 31 Bollard 90
- Order No.: 5CL444603

Dimensions, Weight

- Diameter: 170mm
- Height: 900mm
- Weight: 7.0kg

Lighting technology | Lamps | Control gear

Service life

- Rated service life: 100000h (L80/B50) at AT = 25°C

Component 1

Lighting technology:

- Light control: lens of PC
- Cover: cover panel, transparent
- Beam angle: extremely wide distribution
- Symmetry: asymmetric distribution
- Secondary light control: reflector of PC

Lamps:

- Lamps: with LED
- Rated luminous flux: 1500lm
- Luminous efficacy: 107lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 4 SDCM (initial)
- Rated input power: 14W

Operating device:

- Control gear: ECG DALI
- Control: DALI

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK10
- Temperature range (operation): -20..+50°C
- Certification, designation: CE, ENEC

Material, Colour

- luminaire housing: aluminium, powder-coated, Siteco® metallic grey
- Colour specification: Siteco® metallic grey
- Cover: cover panel of PC

Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm²
- Nominal voltage: 220..240V, 50/60Hz, AC


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5CL444603 | **GTIN (EAN):** 4058352521526

Dimensions: CL31Bollard90,1500lm830,DA

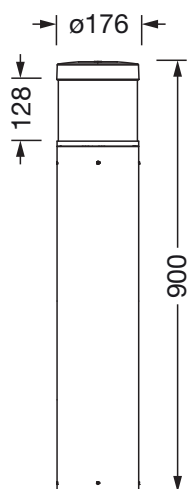

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -