

**Order No.:** 56TL1MBSHE1B | **GTIN (EAN):** 4058352542392

**Product description:** LicTrsens, HF-sens



Licross® TrunkingSensor-Module HE1-S, slave, central control, local control, dimmable, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, voltage: 230V, voltage type: AC, 1 x HF movement sensor, 1 x light sensor input, 1 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.5  
GTIN (EAN): 4058352542392

Order No.: 56TL1MBSHE1B | GTIN (EAN): 4058352542392

Detailed technical description: LicTrsens,HF-sens



#### Key data

- System family: Siteco Connect 11, SITECO Connect 22
- Product type: sensor
- Product name: Licross® Trunking
- Order No.: 56TL1MBSHE1B

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Lamps:

- Supplement: halogen-free wiring

##### Operating device:

- Control: DALI 2, dimmable

##### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Certification, designation: CE, UKCA

##### Material, Colour

- sensor module: sheet steel, coil coated, white
- Colour specification: white

##### Mounting

- Mounting height: 2.5..6m
- Supplement: only suitable for indoor use

##### Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 230V, 50Hz, AC

##### Dimensions, Weight

- Weight: 0.5kg



##### Inputs

##### 1x HF movement sensor

- Connection: HF sensor
- Detection range: D max=25m (radial)
- Option: range settable in steps

##### 1x light sensor input

- Illuminance: 20..800lx

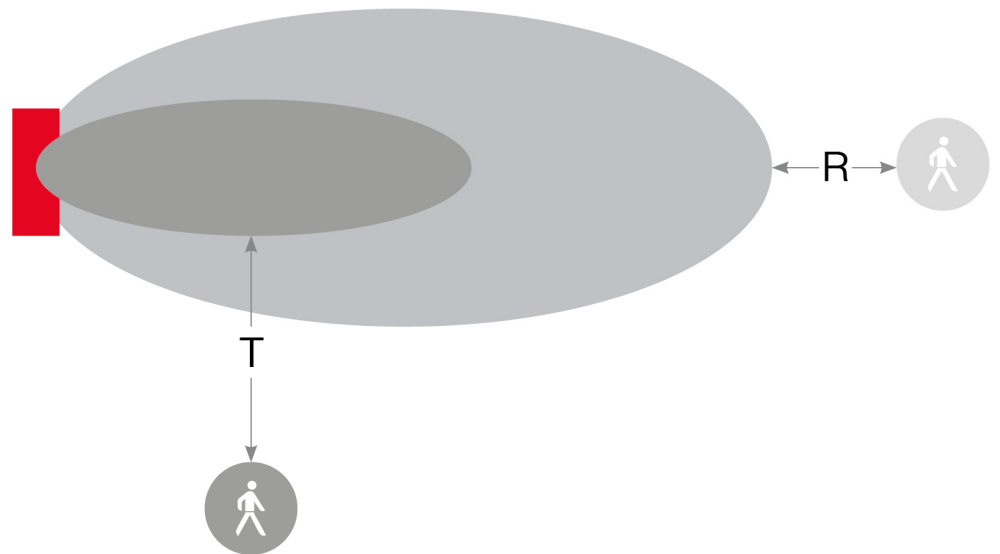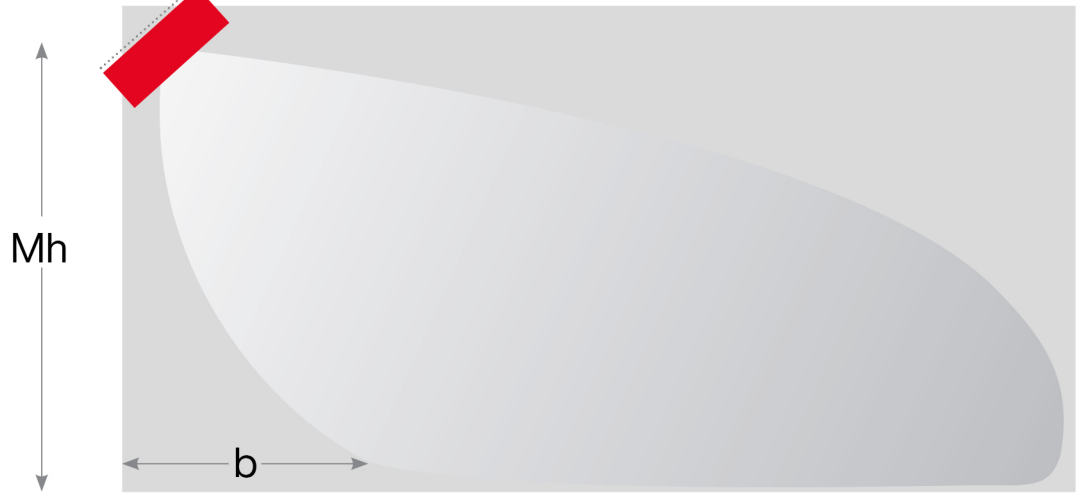

## Siteco Sensor HE1

Mh	a	T	R	b
2,3m	85°	max 15m	max 25m	ca. 1,0m
2,3m	75°	max 10m	max 13m	ca. 0,5m
2,3m	55°	max 6m	max 8m	ca. 0m

Richtwert: Reichweite abhängig von örtlichen Gegebenheiten  
 Guide value: range depending on local conditions