

**Order No.:** 59MX2CW100WA | **GTIN (EAN):** 4058352760536


**Product description:** Sil21,sensPC3,locCtrl,PIR-sens



Silica® 21sensor PC3, slave, local control - self-sufficient standalone sensors, dimmable, installation arrangement: single/continuous arrangement, installation type: slip-in mounting, installation location: to the Silica luminaire, of extruded aluminium section, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, 1 x PIR movement sensor, 1 x light sensor, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.3  
GTIN (EAN): 4058352760536

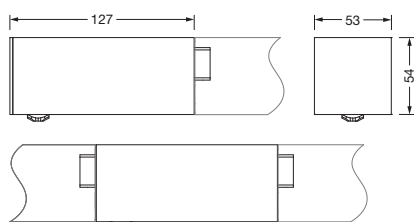

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 20.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 59MX2CW100WA | **GTIN (EAN):** 4058352760536

**Detailed technical description:** Sil21,sensPC3,locCtrl,PIR-sens



## Key data

- System family: SITECO Connect 31 Wireless
- Product type: lighting management components
- Product name: Silica® 21
- Order No.: 59MX2CW100WA

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: Bluetooth® Mesh 4.2, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0...+40°C
- Certification, designation: CE

#### Material, Colour

- housing: extruded aluminium section, anodised, traffic white (RAL 9016), for luminaires with opal or prismatic cover
- Colour specification: traffic white (RAL 9016)

#### Mounting

- Mounting method, mounting location: slip-in mounting, to the Silica® luminaire
- Mounting height: 2.5...5m
- Arrangement: single/continuous arrangement
- Supplement: for surface-mounted luminaires, for pendant luminaires

#### Dimensions, Weight

- Length: 127mm
- Width: 53mm
- Height: 54mm
- Weight: 0.3kg

#### Inputs

##### 1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 20.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 59MX2CW100WA | **GTIN (EAN):** 4058352760536

**Dimensions:** Sil21,sensPC3,locCtrl,PIR-sens

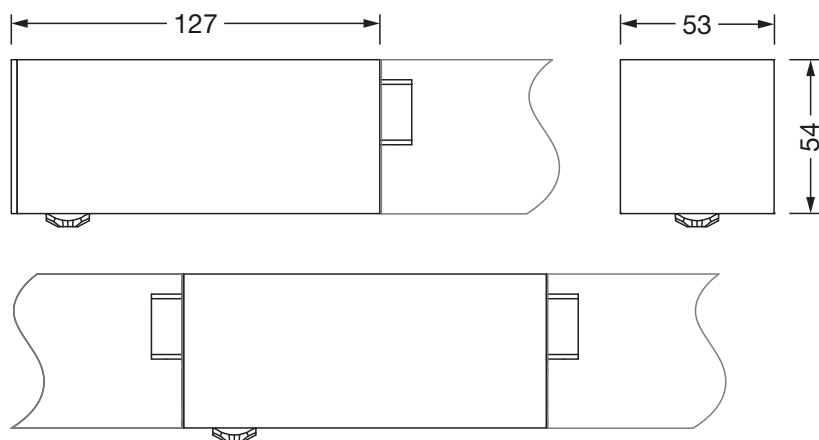

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 20.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -