

Order No.: 5XA8581B2121 | GTIN (EAN): 4058352718438


Product description: FL41md,PL32,26000lm740,ML



Floodlight FL 41 midi, floodlight, primary light control with lens, of PMMA, primary optical cover: protective disc, transparent, light distribution: PL32, light emission: direct distribution, installation type: surface-mounted, LED, High Power LED, rated luminous flux: 26.000lm, luminous efficacy: 130lm/W, light colour: 740, colour temperature: 4000K, with cable, 3x 1.5mm², mains connection: 220..240V, AC, 50/60Hz, connection cable pre-assembled, cable length: 2m, rated input power: 200W, luminaire housing, of diecast aluminium, powder-coated, metallic grey (RAL 9006), length: 375mm, width: 335mm, height: 65mm, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, impact resistance: IK08, permissible operating ambient temperature: -40..+40°C, permissible storage temperature: -40..+60°C, packaging unit: 1 piece

IP 65 IK 08  

Lamps:	LED
Wt. (kg):	3.7
GTIN (EAN):	4058352718438

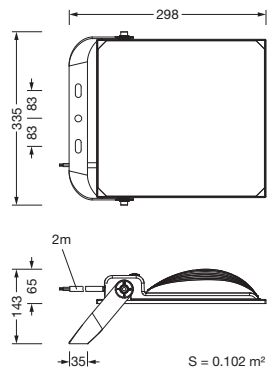

Order No.: 5XA8581B2121 | GTIN (EAN): 4058352718438

Detailed technical description: FL41md,PL32,26000lm740,ML



Key data

- Product type: floodlight
- Product name: Floodlight FL 41 midi
- Order No.: 5XA8581B2121

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of PMMA
- Cover: protective disc, transparent
- Light distribution: PL32
- Light emission: direct distribution

Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 26000lm
- Luminous efficacy: 130lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 70
- Light colour: 740
- SDCM (Standard Deviation of Colour Matching): MacAdam \leq 7 SDCM (initial)
- Rated input power: 200W
- Supplement: luminous flux adjustable on luminaire in four steps (13000/19500/22100/26000lm), connected load according to luminous flux setting (100/150/170/200W)

Operating device:

- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK08
- Temperature range (operation): -40..+40°C
- Certification, designation: CE

Material, Colour

- luminaire housing: diecast aluminium, powder-coated, metallic grey (RAL 9006)
- Colour specification: metallic grey (RAL 9006)
- Cover: protective disc

Mounting

- Mounting method, mounting location: surface-mounted
- Arrangement: single arrangement
- Supplement: with mounting bracket

Electrical connection

- Connection: cable, 3x 1.5mm²
- Nominal voltage: 220..240V, 50/60Hz, AC
- Connection cable: pre-assembled, L= 2m

Dimensions, Weight

- Length: 375mm
- Width: 335mm
- Height: 65mm
- Weight: 3.7kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 5XA8581B2121 | GTIN (EAN): 4058352718438

Dimensions: FL41md,PL32,26000lm740,ML

