


Order No.: 5LZ904712 | GTIN (EAN): 4008321710871 Product description: SCon210,controller,wired



SITECO Connect 21-Ocontroller, master, central control - connection to lighting or building management, dimmable, installation type: recessed, installation location: in an electrical distributor, of plastic, part units: 9 part units, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, voltage: 100..240V, voltage type: AC, 1 x network connector Ethernet, 4 x DALI, 4 x relay contact, packaging unit: 1 piece

IP 20 ≟ (∈

Wt. (kg): GTIN (EAN): 0.4 4008321710871



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

ѕітесо

Order No.: 5LZ904712 | GTIN (EAN): 4008321710871 Detailed technical description: SCon210,controller,wired



Key data

- System family: SITECO Connect 21 O
- Product type: control unit
- Product name: SITECO Connect 21-0
- Order No.: 5LZ904712

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE

Material, Colour

- housing: plastic, grey, 9 part units
- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in an electrical distributor
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: terminal, 3-pole, max.
 2.5mm²
- Nominal voltage: 100..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 90mm
- Width: 160mm
- Height: 62mm
- Weight: 0.4kg

Outputs

4x DALI


- Connection: plug-in terminal, 2-pole, max. 2.5mm²
- Limiting: max. 64x ECG DALI
- System current: DALI current 250mA per DALI line
- Cable length: max. 300m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

- Connection: screw terminal, 3-pole, max. 2.5mm²
- Feature: changeover relay 5A, programmable via DALI



Order No.: 5LZ904712 | GTIN (EAN): 4008321710871 Dimensions: SCon21O,controller,wired

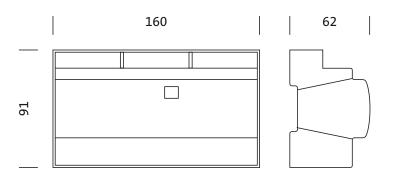

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -