


**Order No.:** 52HN12DA4LMA | **GTIN (EAN):** 4069025350022


**Product description:** HB21/Mod-md,wd,26500lm840,DA2



high bay luminaire Highbay 21 for Modario® trunking rail midi; direct symmetric wide distribution, light control with lens of PMMA; UGR  $\leq 22$  (X = 4H | Y = 8H | S = 0.25H | reflection values 70/50/20); luminous flux: 26.500lm; light colour: 840, colour temperature: 4000K, MacAdam  $\leq 3$  SDCM (initial), colour rendering: CRI > 80; luminous efficacy: 185,8lm/W; rated service life: 75.000h (L80) at AT= ta max; control: DALI 2; luminaire connection: plug, 5-pole, with phase selection mains connection: 230..240V, AC 50/60Hz; connected load: 142,6W; protection rating (complete): IP64; insulation class (complete): insulation class I (protective earthing); protection symbol: D; impact resistance: IK06; certification: CE, UKCA; internal wiring halogen-free; luminaire LABS conformity tested according to VDMA 24364:2018-05; Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC; housing frame of high-performance plastic PA6, matt traffic white (RAL 9016); cover of PMMA; fixing on rail side of steel, galvanised, white; blank cover of PC, traffic white (RAL 9016); dimension (LxWxH): 1.195 x 442 x 72mm; permissible operating ambient temperature: -40..+55°C (reducing of maximum allowable ambient temperature of 5°C with ceiling mounting); packaging unit: 1 piece

IP 64 IK 06  

Lamps: LED  
Wt. (kg): 3.5  
GTIN (EAN): 4069025350022



**Order No.:** 52HN12DA4LMA | **GTIN (EAN):** 4069025350022

**Detailed technical description:** HB21/Mod-md,wd,26500lm840,DA2



## Key data

- Product type: high bay luminaire
- Product name: Highbay 21 for Modario® trunking rail midi
- Order No.: 52HN12DA4LMA

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 22$
- UGR viewing direction along lateral luminaire axis:  $\leq 22$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 26500lm
- Luminous efficacy: 186lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 142.6W
- Supplement: internal wiring halogen-free

#### Operating device:

- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP64
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D
- Temperature range (operation): -40...+55°C
- Supplement: LABS conformity tested according to VDMA 24364:2018-05, Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC
- Certification, designation: CE, UKCA

## Material, Colour

- housing frame: high-performance plastic PA6, matt traffic white (RAL 9016)
- Colour specification: matt traffic white (RAL 9016)
- fixing on rail side: steel, galvanised, white
- Colour specification: white
- blank cover: PC, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: cover of PMMA

## Mounting

- Arrangement: continuous row arrangement

## Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 230...240V, 50/60Hz, AC

## Dimensions, Weight


- Length: 1195mm
- Width: 442mm
- Height: 72mm
- Weight: 3.5kg

## Service life

- Rated service life: 75000h (L80) at AT = ta max

**Order No.:** 52HN12DA4LMA | **GTIN (EAN):** 4069025350022

**Dimensions:** HB21/Mod-md,wd,26500lm840,DA2

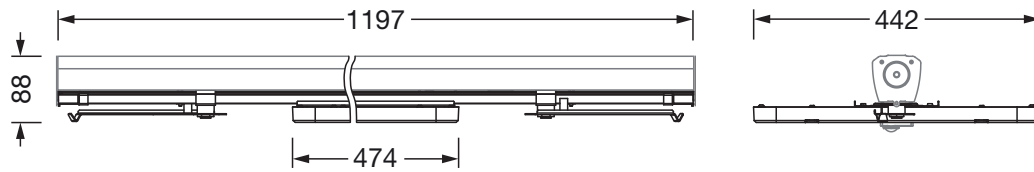

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 15.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)