

Order No.: 51MP25WD2441WB | **GTIN (EAN):** 4069025079787


Product description: APOr,1245x200,3800lm840,DA2,IP40,wh



Apollon Rectangular, office luminaire, primary optical cover: micro prismatic cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 3.800lm, luminous efficacy: 134lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI 2, with terminal, 5-pole, mains connection: 220..240V, AC, 50/60Hz, rated input power: 28W, housing, of sheet steel, coated, traffic white (RAL 9016), length: 1.245mm, width: 200mm, height: 44mm, protection rating (complete): IP20, protection rating (on room side): IP40, protection rating (lamp compartment, on room side): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, UKCA, impact resistance: IK02, permissible operating ambient temperature: -20..+40°C, standard: EN 60598-2-22, packaging unit: 1 piece



| | |
|-------------|---------------|
| Lamps: | LED |
| Wt. (kg): | 3.4 |
| GTIN (EAN): | 4069025079787 |

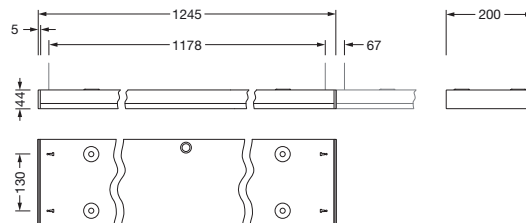

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 22.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51MP25WD2441WB | **GTIN (EAN):** 4069025079787

Detailed technical description: APOr,1245x200,3800lm840,DA2,IP40,wh



Key data

- Product type: office luminaire
- Product name: Apollon Rectangular
- Order No.: 51MP25WD2441WB

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: micro prismatic cover
- Beam angle: wide distribution, 90°
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 3800lm
- Luminous efficacy: 134lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 28W
- Supplement: with through-wiring, maximum luminous flux 5000lm (UGR22)

Operating device:

- Control: DALI 2

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP40
- Protection rating (lamp compartment, on room side): IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Temperature range (operation): -20..+40°C
- Standard: EN 60598-2-22
- Certification, designation: CE, ENEC, UKCA

Material, Colour

- housing: sheet steel, coated, traffic white (RAL 9016)
- Cover: micro prismatic cover of PMMA

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: continuous row arrangement
- Supplement: luminaire includes fixing accessories for ceiling surface mounting; for other types of installation: please order mounting accessories separately

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 1245mm
- Width: 200mm
- Height: 44mm
- Weight: 3.4kg

Service life

- Rated service life: 50000h (L80) at AT = 25°C

Order No.: 51MP25WD2441WB | GTIN (EAN): 4069025079787

Dimensions: APOr,1245x200,3800lm840,DA2,IP40,wh

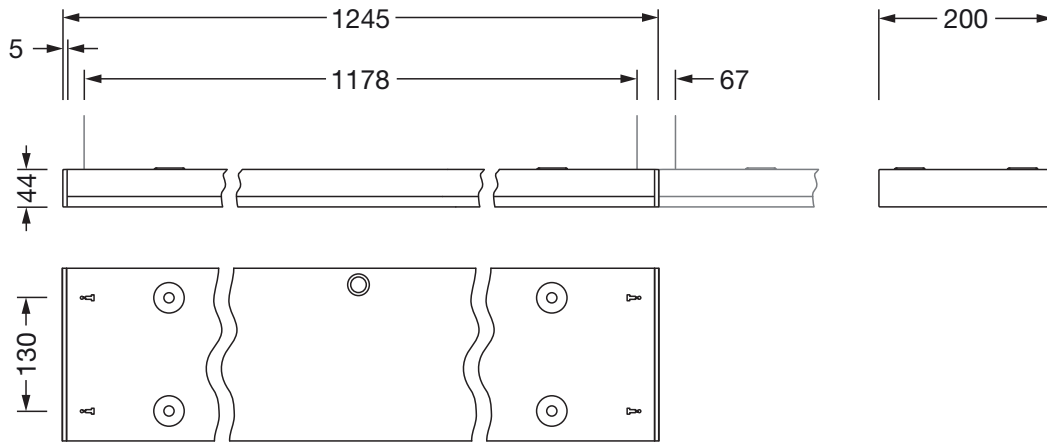

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 22.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -