

Order No.: 51WB14MC82B | **GTIN (EAN):** 4069025719614


Product description: RON21,1800lm830/840,ML,PC,wh



Rondel 21, wall and ceiling luminaire, of PC, opal, light emission: direct distribution, installation type: surface-mounted, LED, rated luminous flux: 1.800lm, luminous efficacy: 120lm/W, light colour: 830/840, colour temperature: 3000/4000K, control gear: ON/OFF Multilumen, with terminal, 3-pole, mains connection: 220..240V, AC, 50/60Hz, rated input power: 15W, housing, round, of sheet steel, powder-coated, white, diameter: 380mm, height: 28mm, cover, of PC, graphite (RAL 7037), protection rating (complete): IP40, insulation class (complete): insulation class II (safety insulation), certification: CE, impact resistance: IK03, permissible operating ambient temperature: -20..+40°C, packaging unit: 1 piece

IP 40 IK 03  

Lamps:	LED
Wt. (kg):	1.3
GTIN (EAN):	4069025719614



Order No.: 51WB14MC82B | **GTIN (EAN):** 4069025719614

Detailed technical description: RON21,1800lm830/840,ML,PC,wh



Key data

- Product type: wall and ceiling luminaire
- Product name: Rondel 21
- Order No.: 51WB14MC82B

Dimensions, Weight

- Diameter: 380mm
- Height: 28mm
- Weight: 1.3kg

Lighting technology | Lamps | Control gear

Service life

- Rated service life: 50000h (L80) at AT = 25°C

Component 1

Lighting technology:

- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 1800lm
- Luminous efficacy: 120lm/W
- Colour temperature: 3000/4000K
- Colour rendering index: CRI > 80
- Light colour: 830/840
- Rated input power: 15W
- Supplement: luminous flux adjustable on luminaire in 3 steps (1800/.../2160lm), connected load according to luminous flux setting (12/.../18W)

Operating device:

- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK03
- Temperature range (operation): - 20...+40°C
- Certification, designation: CE

Material, Colour

- housing: sheet steel, powder-coated, white, round
- cover: PC, graphite (RAL 7037)

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall

Electrical connection

- Connection: terminal, 3-pole
- Nominal voltage: 220..240V, 50/60Hz, AC


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 03.07.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51WB14MC82B | **GTIN (EAN):** 4069025719614

Dimensions: RON21,1800lm830/840,ML,PC,wh

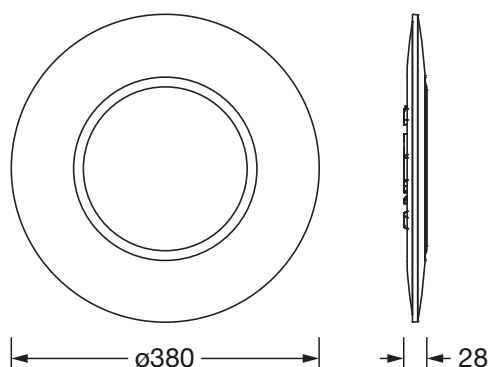

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 03.07.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -