

Order No.: 5LZ980201ACK | **GTIN (EAN):** 4069025765642


Product description: SConWi,surf-mount-hous,surf,plast,wh



SITECO Connect Wireless, surface-mounted housing, installation type: surface-mounted, control gear: Casambi, housing, housing, of plastic, white, height: 65mm, surface-mounted housing, local control - self-sufficient standalone sensors, certification: CE, permissible operating ambient temperature: 0..+50°C, packaging unit: 1 piece

CE

Wt. (kg): 0.1
GTIN (EAN): 4069025765642

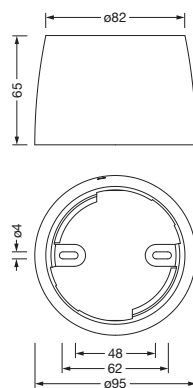

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 24.07.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ980201ACK | **GTIN (EAN):** 4069025765642

Detailed technical description: SConWi,surf-mount-hous,surf,plast,wh



Key data

- System family: SITECO Connect Wireless
- Product type: surface-mounted housing
- Product name: SITECO Connect Wireless
- Order No.: 5LZ980201ACK

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: Casambi

Certificates, Standards

- Temperature range (operation): 0...+50°C
- Certification, designation: CE

Material, Colour

- housing: plastic, white
- housing: plastic, white

Mounting


- Mounting method, mounting location: surface-mounted, to the ceiling
- Supplement: only suitable for use in indoor areas

Dimensions, Weight

- Height: 65mm
- Weight: 0.1kg

Order No.: 5LZ980201ACK | **GTIN (EAN):** 4069025765642

Dimensions: SConWi,surf-mount-hous,surf,plast,wh

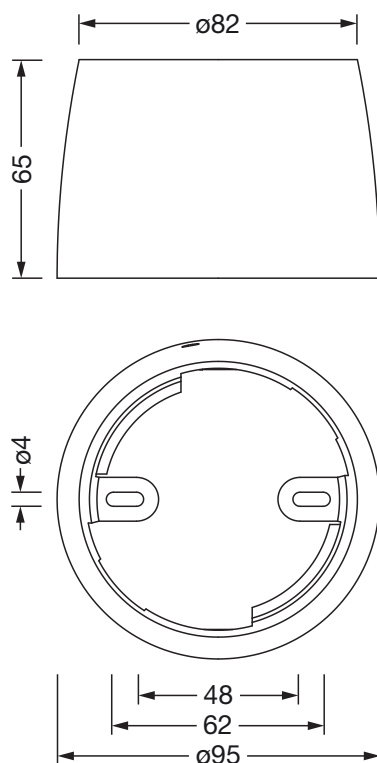

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 24.07.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -