

## Photometric test report

Family  
**Monsun® 41**

Order number: **51FK20MK440A**  
EAN: **4058352539095**

LP number  
**59261\_3**



**Version** cover, of PC, frosted  
**Lamps** LED 4000 K | CRI ≥ 80  
**Controlgear** ECG Multilumen  
**Rated values** Net luminous flux = 4000 lm  
Power consumption = 30.0 W  
Luminous efficacy = 133.3 lm/W

serial  
documentation  
**08.08.2022**


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 307 cd/klm

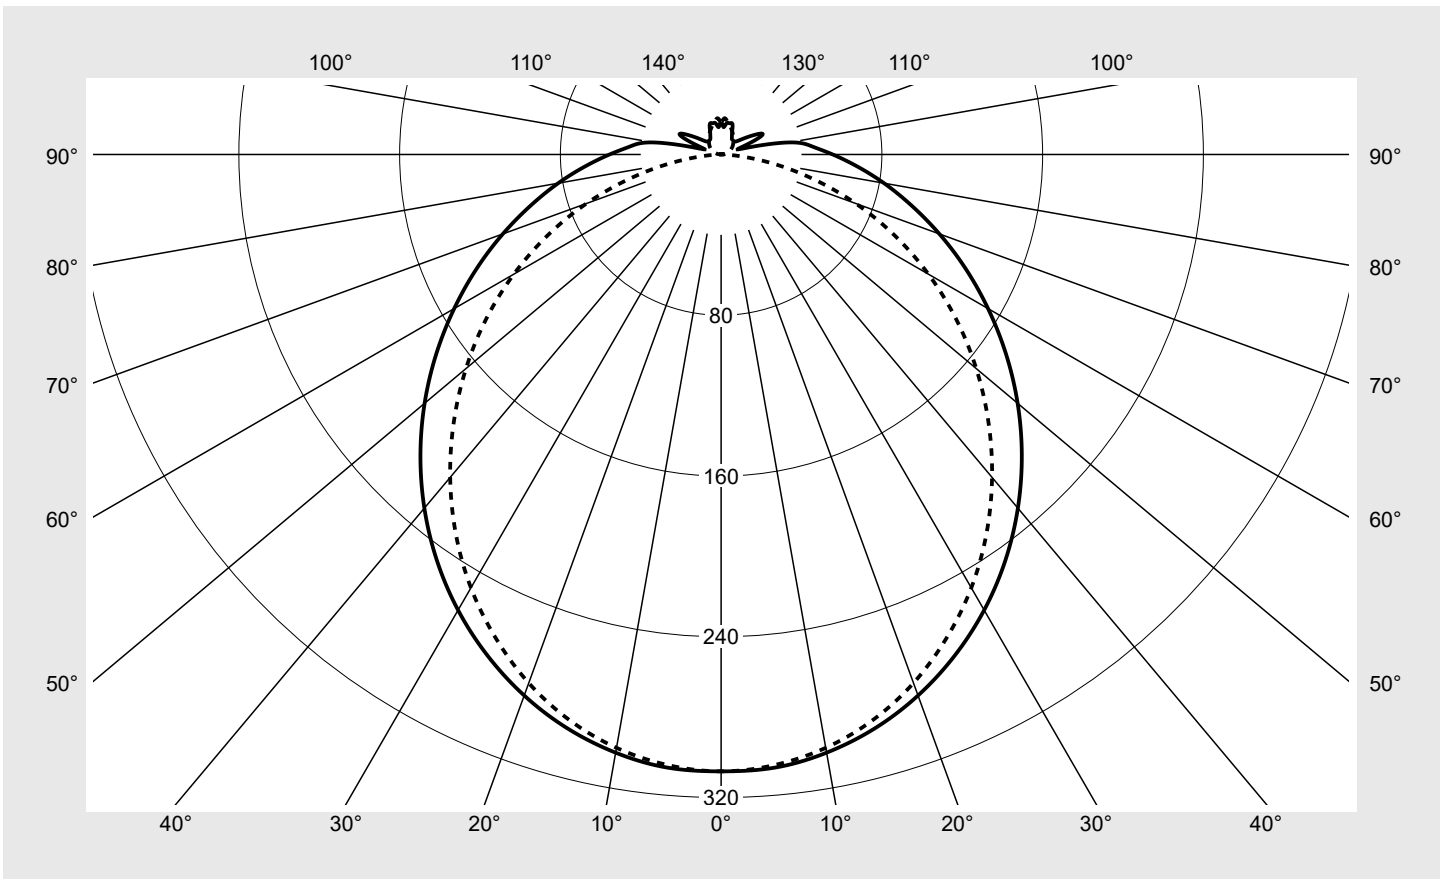

### Classifications

DIN 5040 A 4 1  
CIE N1=44 N2=74 N3=92  
N4=92 N5=100

### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  92.0%  
 $\phi_o$  8.0%

### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Monsun® 41</b>	<b>Order number: 51FK20MK440A</b> <b>EAN: 4058352539095</b>	<b>LP number</b> <b>59261_3</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	307.0	307.0	307.0	307.0	307.0	307.0	307.0	1.8	1.8
5°	306.3	305.9	305.5	305.2	305.1	305.1	305.0	14.6	16.4
10°	302.3	301.7	301.1	300.6	300.3	300.1	299.8	28.6	45.1
15°	295.7	294.8	293.9	293.0	292.5	292.0	291.4	41.6	86.7
20°	286.5	285.2	283.9	282.7	281.7	280.8	279.9	53.0	139.7
25°	275.1	273.4	271.6	269.8	268.4	266.9	265.5	62.6	202.3
30°	261.8	259.5	257.2	254.9	253.0	251.0	249.0	69.9	272.2
35°	246.6	243.7	240.9	238.0	235.4	232.8	230.3	74.9	347.1
40°	229.8	226.4	223.0	219.6	216.3	213.1	209.8	77.4	424.5
45°	211.6	207.7	203.8	199.8	195.9	192.0	188.1	77.5	502.0
50°	192.6	188.1	183.6	179.1	174.7	170.2	165.7	75.2	577.2
55°	173.1	168.1	163.2	158.2	153.1	147.9	142.7	71.0	648.2
60°	153.4	147.8	142.2	136.6	130.8	124.9	119.1	64.8	712.9
65°	134.2	127.9	121.5	115.2	108.6	101.9	95.3	57.1	770.0
70°	115.6	108.6	101.7	94.8	86.9	79.1	71.3	48.5	818.5
75°	98.1	90.6	83.2	75.7	66.4	57.1	47.8	39.3	857.9
80°	82.3	74.5	66.7	58.8	48.0	37.3	26.5	30.6	888.4
85°	67.9	60.1	52.3	44.5	32.7	20.8	9.0	22.6	911.1
90°	55.5	48.2	40.8	33.4	22.6	11.9	1.1	16.9	928.0
95°	45.6	38.9	32.2	25.5	17.5	9.4	1.3	13.4	941.3
100°	34.6	26.1	17.6	9.2	6.8	4.5	2.1	7.4	948.8
105°	12.1	10.7	9.3	7.8	6.3	4.7	3.1	4.1	952.9
110°	11.4	12.1	12.9	13.6	10.5	7.3	4.2	5.5	958.4
115°	22.4	18.5	14.5	10.6	8.8	6.9	5.1	6.0	964.4
120°	19.8	15.8	11.7	7.7	7.2	6.6	6.0	4.9	969.3
125°	14.1	11.6	9.1	6.7	6.8	6.8	6.9	3.9	973.2
130°	10.3	9.1	7.9	6.7	7.1	7.4	7.7	3.3	976.5
135°	9.2	8.5	7.9	7.2	7.7	8.1	8.6	3.1	979.6
140°	9.2	8.9	8.6	8.3	8.6	9.0	9.4	3.1	982.7
145°	9.4	9.6	9.8	10.0	10.1	10.1	10.2	3.1	985.8
150°	10.8	11.5	12.2	12.9	12.5	12.0	11.6	3.3	989.1
155°	13.1	13.7	14.3	15.0	14.3	13.6	12.9	3.2	992.3
160°	16.3	16.1	15.9	15.7	15.2	14.7	14.2	2.9	995.2
165°	16.1	16.2	16.2	16.3	16.1	15.8	15.6	2.3	997.5
170°	15.7	16.2	16.6	17.1	17.0	17.0	16.9	1.6	999.1
175°	13.7	15.0	16.3	17.7	17.8	17.9	18.0	0.8	999.9
180°	16.1	16.1	16.1	16.1	16.1	16.1	16.1	0.1	1000.0

## Photometric test report

Family <b>Monsun® 41</b>	Order number: <b>51FK20MK440A</b> EAN: <b>4058352539095</b>	LP number <b>59261_3</b>
-----------------------------	--	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>								
------------------	----------------------	---------------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.3	22.0	20.6	22.3	22.6	20.1	21.8	20.4	22.1	22.5
	3H	22.1	23.7	22.5	24.0	24.4	21.6	23.2	22.0	23.5	23.9
	4H	23.0	24.5	23.4	24.8	25.2	22.2	23.7	22.6	24.0	24.4
	6H	23.9	25.3	24.3	25.6	26.0	22.6	24.0	23.0	24.4	24.8
	8H	24.3	25.6	24.8	26.0	26.4	22.7	24.1	23.2	24.4	24.8
	12H	24.8	26.0	25.2	26.4	26.8	22.8	24.0	23.2	24.4	24.8
4H	2H	21.0	22.5	21.4	22.8	23.2	20.9	22.3	21.2	22.7	23.1
	3H	23.0	24.3	23.4	24.7	25.1	22.6	23.9	23.0	24.3	24.7
	4H	24.0	25.2	24.5	25.6	26.0	23.3	24.5	23.7	24.9	25.3
	6H	25.1	26.1	25.5	26.5	27.0	23.9	24.9	24.3	25.3	25.8
	8H	25.6	26.5	26.0	27.0	27.4	24.0	25.0	24.5	25.4	25.9
	12H	26.1	26.9	26.6	27.4	27.9	24.1	25.0	24.6	25.5	26.0
8H	4H	24.4	25.3	24.8	25.8	26.3	23.8	24.7	24.2	25.2	25.6
	6H	25.6	26.4	26.1	26.9	27.4	24.5	25.3	25.0	25.8	26.3
	8H	26.2	26.9	26.7	27.4	27.9	24.8	25.5	25.3	26.0	26.5
	12H	26.9	27.5	27.4	28.0	28.5	25.0	25.6	25.5	26.1	26.6
12H	4H	24.4	25.3	24.9	25.8	26.3	23.9	24.7	24.4	25.2	25.7
	6H	25.7	26.4	26.2	26.9	27.4	24.7	25.4	25.2	25.9	26.4
	8H	26.4	27.0	26.9	27.5	28.0	25.0	25.6	25.5	26.1	26.7

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1162</b>	<b>H(C0) = 21</b>	<b>H(C180) = 21</b>
			<b>B = 76</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		10621.2	10501.1	10531.5	10707.4	11026.3	11478.9	12050.0	
50°		10211.1	10057.6	10068.6	10239.1	10568.4	11052.0	11679.2	
55°		9799.7	9612.1	9603.2	9768.5	10095.1	10597.3	11272.4	
60°		9398.1	9156.6	9108.1	9247.4	9559.9	10070.9	10789.0	
65°		9029.4	8714.6	8608.1	8702.0	8975.7	9469.6	10208.8	
70°		8702.0	8300.9	8125.7	8164.9	8345.0	8756.5	9441.6	
75°		8451.1	7945.3	7687.5	7660.6	7666.7	7887.6	8366.2	
80°		8365.1	7730.2	7377.2	7279.9	7026.3	6912.9	6901.8	
85°		8488.8	7713.2	7278.8	7154.5	6580.7	5949.7	4653.3	


**Photometric test report**

<b>Family</b> <b>Monsun® 41</b>	<b>Order number: 51FK20MK440A</b> <b>EAN: 4058352539095</b>	<b>LP number</b> <b>59261_3</b>
------------------------------------	--	------------------------------------



**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

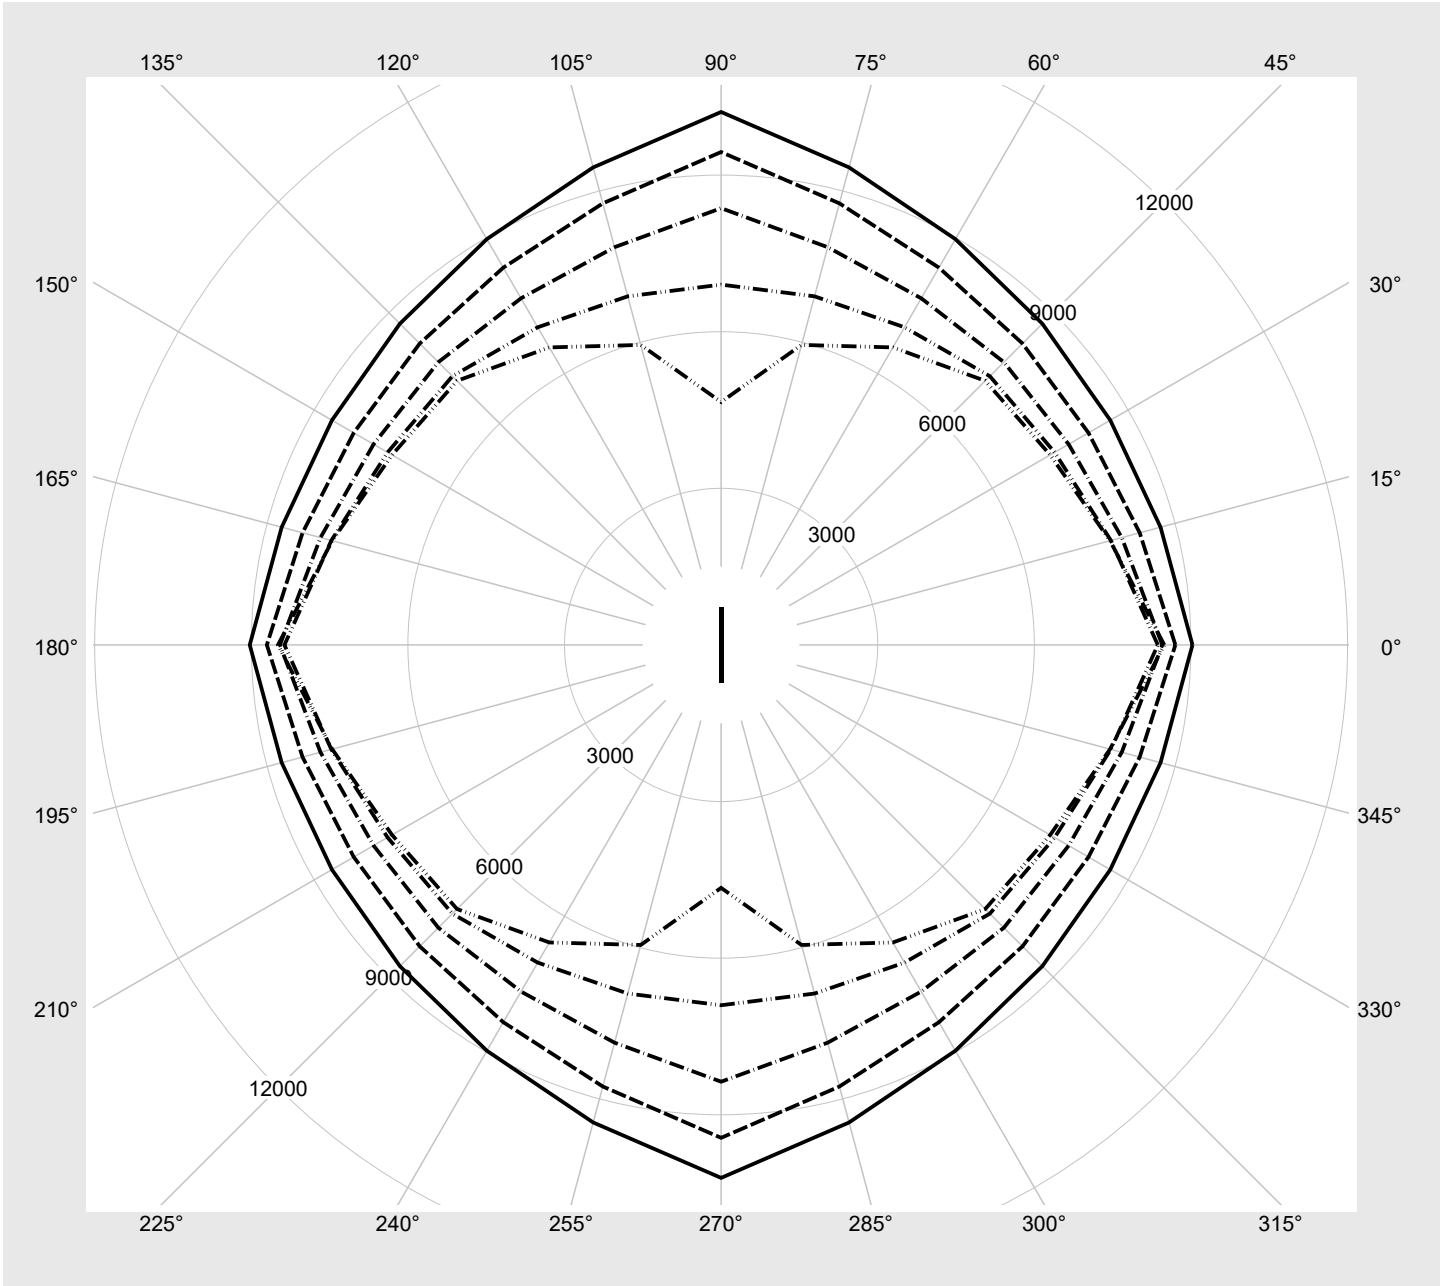

**Photometric test report**

<b>Family</b> <b>Monsun® 41</b>	<b>Order number: 51FK20MK440A</b> <b>EAN: 4058352539095</b>	<b>LP number</b> <b>59261_3</b>
------------------------------------	--	------------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>siteco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting 1	Luminous flux [lm]	Power consumption [W]
1	HIGH	4000	30.0
0	LOW	2000	15.0