


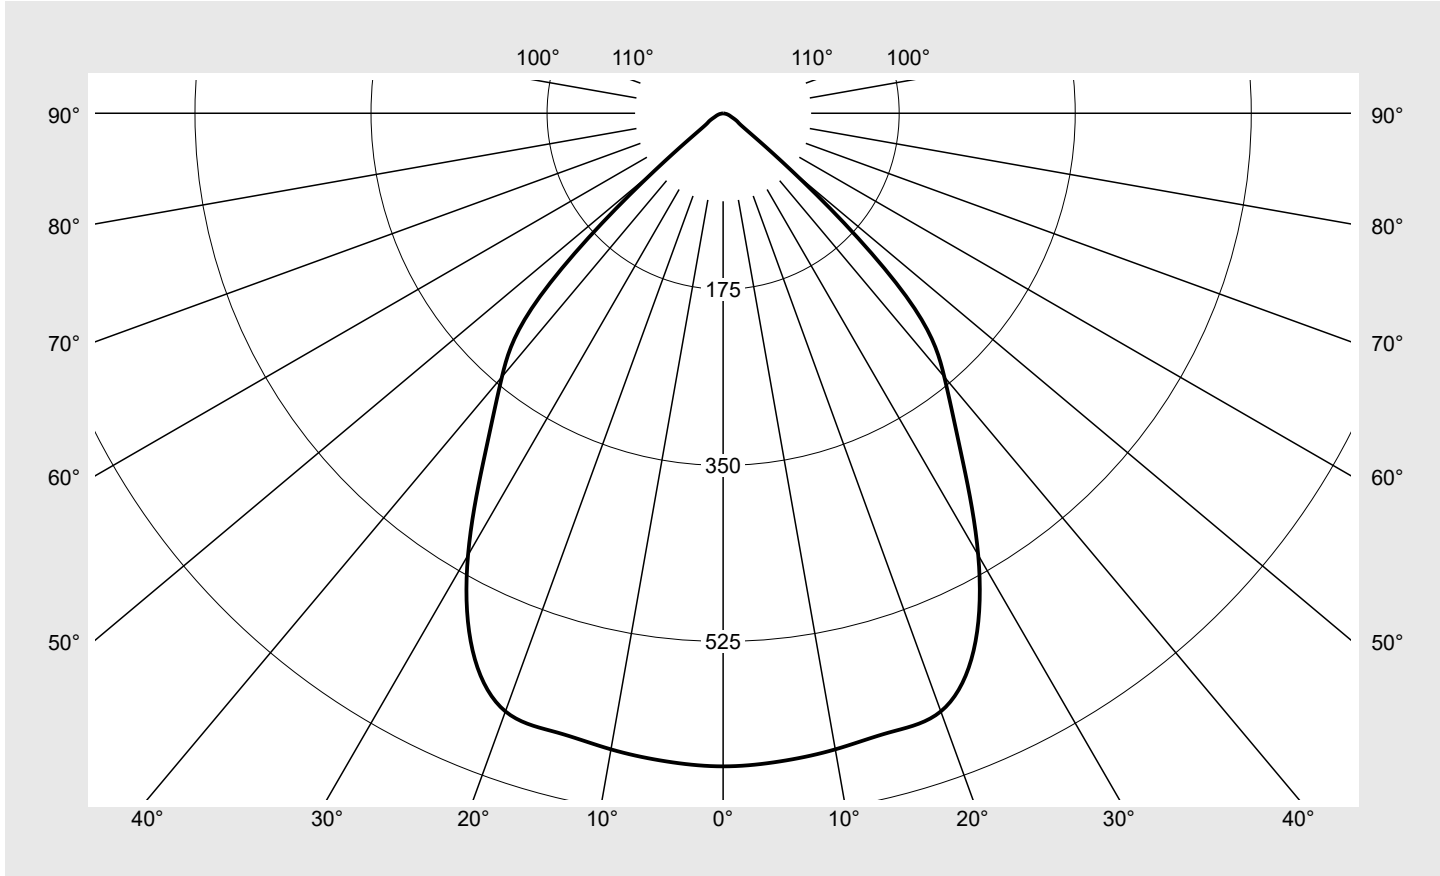


# Photometric test report

<b>Family</b> <b>Highbay 31</b>	<b>Order number: 51HC42DA4JMB + 59HC91003</b> <b>EAN: 4058352700273 + 4058352463215</b>	<b>LP number</b> <b>59133_4</b>
	<b>Version</b> primary light control with lens, PC, clear, aluminium reflector, wide distribution	<b>serial documentation</b> <b>16.01.2023</b>
	<b>Lamps</b> LED 4000 K   CRI ≥ 80	
	<b>Controlgear</b> ECG-DALI	
<b>Rated values</b>	Net luminous flux = 18550 lm Power consumption = 134.0 W Luminous efficacy = 138.4 lm/W	

**Luminous intensity in cd/klm** C180-0 **Imax: 649 cd/klm**



Classifications	
DIN 5040	A 6 0
CIE	N1=80 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 31	Order number: 51HC42DA4JMB + 59HC91003 EAN: 4058352700273 + 4058352463215	LP number 59133_4
----------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	<b>sITeco</b>
--	----------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	649.2	3.9	3.9
5°	646.7	30.9	34.8
10°	642.1	61.1	95.9
15°	637.3	90.4	186.3
20°	632.7	118.6	304.9
25°	589.2	136.5	441.4
30°	507.2	139.0	580.4
35°	412.3	129.6	710.0
40°	342.0	120.5	830.5
45°	257.2	99.7	930.2
50°	89.7	37.7	967.9
55°	25.5	11.4	979.3
60°	16.3	7.8	987.1
65°	10.2	5.1	992.2
70°	7.0	3.6	995.8
75°	4.5	2.4	998.1
80°	2.5	1.3	999.5
85°	1.0	0.5	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

## Photometric test report

Family Highbay 31	Order number: 51HC42DA4JMB + 59HC91003 EAN: 4058352700273 + 4058352463215	LP number 59133_4
----------------------	--	----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.8	23.1	22.2	23.4	23.8	21.8	23.1	22.2	23.4	23.8
	3H	21.7	22.9	22.1	23.2	23.6	21.7	22.9	22.1	23.2	23.6
	4H	21.7	22.7	22.1	23.1	23.5	21.7	22.7	22.1	23.1	23.5
	6H	21.6	22.6	22.0	23.0	23.4	21.6	22.6	22.0	23.0	23.4
	8H	21.7	22.5	22.1	22.9	23.3	21.7	22.5	22.1	22.9	23.3
	12H	21.6	22.4	22.1	22.8	23.2	21.6	22.4	22.1	22.8	23.2
4H	2H	21.6	22.7	22.0	23.1	23.4	21.6	22.7	22.0	23.1	23.4
	3H	21.5	22.4	22.0	22.8	23.2	21.5	22.4	22.0	22.8	23.2
	4H	21.5	22.3	21.9	22.7	23.1	21.5	22.3	21.9	22.7	23.1
	6H	21.4	22.1	21.9	22.5	23.0	21.4	22.1	21.9	22.5	23.0
	8H	21.4	22.0	21.9	22.5	22.9	21.4	22.0	21.9	22.5	22.9
	12H	21.4	21.9	21.9	22.4	22.9	21.4	21.9	21.9	22.4	22.9
8H	4H	21.4	22.0	21.9	22.4	22.9	21.4	22.0	21.9	22.4	22.9
	6H	21.3	21.8	21.8	22.3	22.8	21.3	21.8	21.8	22.3	22.8
	8H	21.3	21.7	21.8	22.2	22.7	21.3	21.7	21.8	22.2	22.7
	12H	21.3	21.6	21.8	22.1	22.7	21.3	21.6	21.8	22.1	22.7
12H	4H	21.4	21.9	21.9	22.4	22.9	21.4	21.9	21.9	22.4	22.9
	6H	21.3	21.7	21.8	22.2	22.7	21.3	21.7	21.8	22.2	22.7
	8H	21.3	21.6	21.8	22.1	22.7	21.3	21.6	21.8	22.1	22.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 410
-----------------	---------------------------------	---------------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	51109.4
50°	19606.3
55°	6244.8
60°	4590.5
65°	3390.4
70°	2870.3
75°	2422.8
80°	2009.9
85°	1563.7

**Photometric test report**

<b>Family</b> Highbay 31	<b>Order number: 51HC42DA4JMB + 59HC91003</b> <b>EAN: 4058352700273 + 4058352463215</b>	<b>LP number</b> 59133_4
-----------------------------	--	-----------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°    
   $\gamma$  70°    
   $\gamma$  75°    
   $\gamma$  80°    
   $\gamma$  85°

**siteco**

