


Photometric test report

Family Ecopack® 31	Order number: 51LJ12MKM40A + 59LJ203 EAN: 4058352589564 + 4058352612422	LP number 59348_7
Version	diffuser optic, frosted, polycarbonate, adjustable color temperature: 3000K 4000K 5000K, extremely wide distribution, emergency light element 3h operating duration	serial documentation 19.08.2022
Lamps	LED 5000 K CRI ≥ 80	
Controlgear	ECG Multilumen	
Setting	individual position: colour temperature 5000K	
Rated values	Net luminous flux = 4890 lm Power consumption = 36.5 W Luminous efficacy = 134 lm/W	



Luminous intensity in cd/klm C180-0 C270-90 Imax: 248 cd/klm

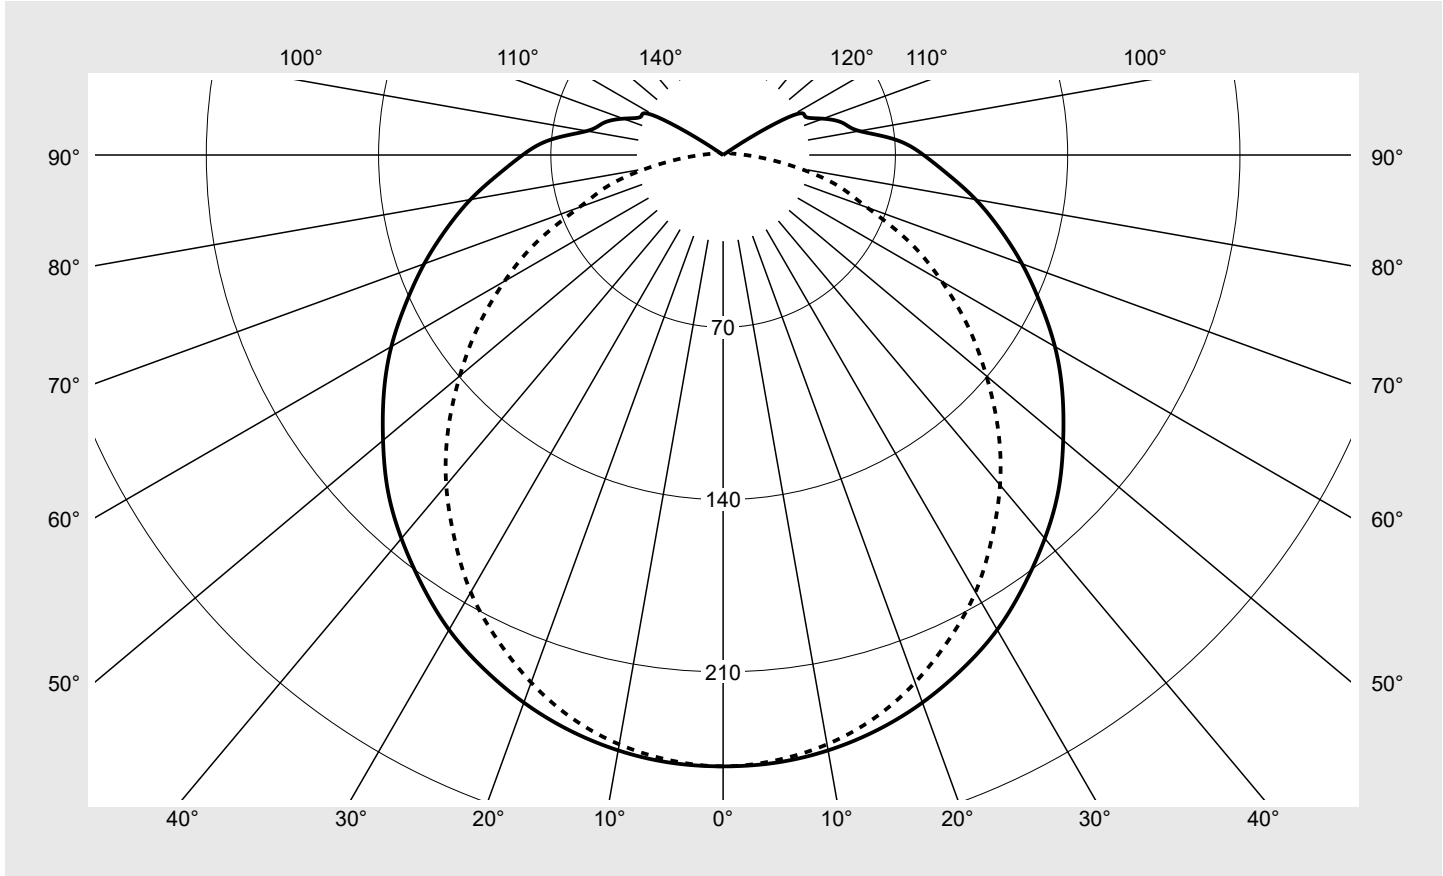

Classifications	
DIN 5040	B 3 1
CIE	N1=39 N2=67 N3=87 N4=89 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	88.8%
ϕ_o	11.2%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MKM40A + 59LJ203 EAN: 4058352589564 + 4058352612422	LP number 59348_7
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	248.4	248.4	248.4	248.4	248.4	248.4	248.4	1.5	1.5
5°	247.8	248.0	248.2	247.6	247.0	246.9	246.9	11.8	13.3
10°	245.6	246.0	246.3	244.9	243.5	243.3	243.2	23.3	36.6
15°	241.9	242.3	242.7	240.5	238.4	237.7	237.0	34.1	70.7
20°	236.8	237.0	237.1	234.0	230.9	229.5	228.1	43.8	114.5
25°	230.3	230.4	230.5	226.1	221.8	219.5	217.2	52.2	166.7
30°	222.7	222.6	222.5	216.9	211.3	208.2	205.1	59.2	225.8
35°	213.3	213.1	212.8	205.7	198.6	194.5	190.3	64.3	290.1
40°	203.4	202.9	202.5	193.9	185.3	180.1	175.0	67.8	357.8
45°	192.7	192.1	191.5	181.3	171.1	164.6	158.1	69.5	427.3
50°	180.4	179.6	178.8	167.2	155.7	147.7	139.7	69.2	496.6
55°	168.3	167.2	166.2	153.2	140.3	130.9	121.5	67.6	564.1
60°	155.7	154.5	153.3	139.2	125.1	113.8	102.5	64.5	628.6
65°	142.1	141.2	140.3	124.9	109.4	96.4	83.4	60.0	688.6
70°	129.3	128.0	126.8	110.8	94.9	78.6	62.2	54.5	743.1
75°	116.5	115.1	113.8	97.8	81.8	65.0	48.3	49.1	792.2
80°	104.3	102.8	101.4	86.0	70.6	51.1	31.7	43.2	835.4
85°	91.9	90.5	89.2	73.8	58.4	38.0	17.7	36.8	872.2
90°	81.5	79.6	77.8	62.8	47.8	28.4	9.1	31.2	903.4
95°	70.6	66.3	62.0	50.4	38.9	22.1	5.3	25.3	928.7
100°	56.2	54.3	52.5	39.2	26.0	14.7	3.5	19.5	948.1
105°	50.3	48.5	46.6	34.6	22.7	12.9	3.1	16.9	965.1
110°	43.2	41.8	40.4	29.8	19.3	11.1	2.9	14.2	979.3
115°	36.9	35.3	33.8	24.8	15.9	9.4	2.8	11.5	990.8
120°	31.0	29.8	28.6	20.6	12.7	7.7	2.6	9.2	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MKM40A + 59LJ203 EAN: 4058352589564 + 4058352612422	LP number 59348_7
------------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.1	22.8	21.6	23.2	23.7	20.6	22.3	21.0	22.7	23.1
	3H	23.2	24.7	23.6	25.2	25.6	22.3	23.8	22.7	24.2	24.7
	4H	24.2	25.6	24.6	26.1	26.5	22.9	24.4	23.4	24.9	25.3
	6H	25.1	26.4	25.6	26.9	27.5	23.5	24.9	24.0	25.4	25.9
	8H	25.6	26.8	26.1	27.3	27.9	23.8	25.1	24.3	25.6	26.1
	12H	26.0	27.2	26.6	27.7	28.3	23.9	25.2	24.4	25.7	26.2
4H	2H	21.9	23.4	22.4	23.8	24.3	21.5	22.9	21.9	23.3	23.8
	3H	24.2	25.4	24.7	25.9	26.4	23.3	24.6	23.8	25.0	25.6
	4H	25.3	26.5	25.8	27.0	27.5	24.2	25.3	24.7	25.9	26.4
	6H	26.4	27.4	27.0	28.0	28.6	25.0	26.0	25.5	26.5	27.1
	8H	27.0	27.9	27.6	28.5	29.1	25.3	26.3	25.9	26.8	27.4
	12H	27.5	28.3	28.1	28.9	29.6	25.5	26.4	26.1	27.0	27.6
8H	4H	25.7	26.7	26.3	27.3	27.9	24.8	25.7	25.4	26.3	26.9
	6H	27.1	27.9	27.7	28.5	29.2	25.8	26.6	26.4	27.2	27.9
	8H	27.8	28.5	28.4	29.1	29.8	26.3	27.0	26.9	27.6	28.3
	12H	28.5	29.1	29.1	29.7	30.4	26.7	27.3	27.3	27.9	28.6
12H	4H	25.8	26.6	26.4	27.2	27.9	24.9	25.7	25.5	26.3	27.0
	6H	27.2	27.9	27.8	28.5	29.2	26.0	26.7	26.7	27.3	28.0
	8H	28.0	28.6	28.6	29.3	30.0	26.6	27.2	27.2	27.8	28.6


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1142	H(C0) = 29	H(C180) = 29
			B = 56	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13727.7	13844.5	14292.7	14349.5	14699.4	15695.3	17092.3	
50°		13268.9	13383.3	13858.1	13848.5	14152.0	15146.4	16612.6	
55°		12895.2	13003.1	13503.5	13414.2	13656.3	14649.5	16200.9	
60°		12550.4	12658.2	13193.9	13023.6	13203.4	14124.4	15682.1	
65°		12184.5	12327.8	12941.4	12654.6	12728.4	13550.6	15094.7	
70°		11927.0	12053.8	12697.2	12352.4	12397.7	12837.8	13913.1	
75°		11733.3	11865.2	12574.5	12205.8	12282.6	12808.7	14279.7	
80°		11661.6	11801.5	12600.9	12306.8	12590.4	12787.6	13937.1	
85°		11651.3	11823.7	12770.3	12479.5	12928.8	13173.1	15516.3	

Photometric test report


Family Ecopack® 31	Order number: 51LJ12MKM40A + 59LJ203 EAN: 4058352589564 + 4058352612422	LP number 59348_7
-------------------------------------	--	------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

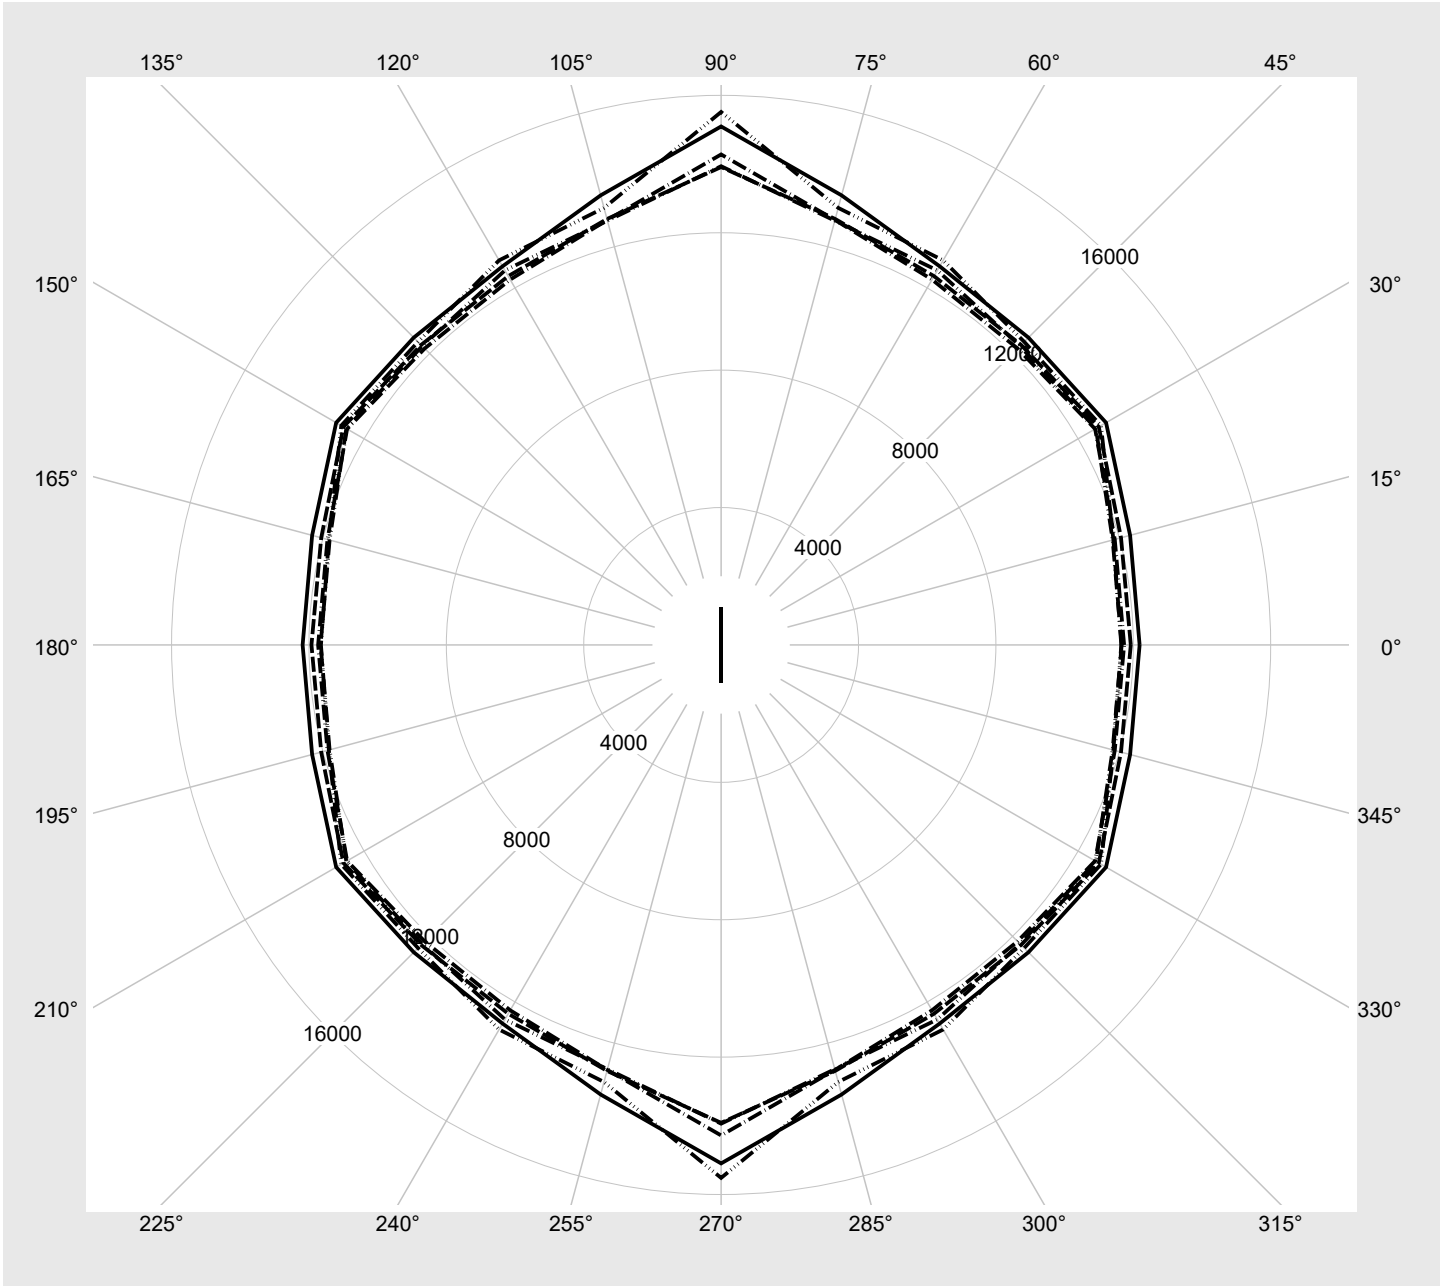

Photometric test report

Family Ecopack® 31	Order number: 51LJ12MKM40A + 59LJ203 EAN: 4058352589564 + 4058352612422	LP number 59348_7
-------------------------------------	--	------------------------------------

Multilumen Table	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
3	ON	ON	4890	36.5
2	ON	OFF	4310	31.5
1	OFF	ON	3620	26.5
0	OFF	OFF	2920	21.5