




Photometric test report

Family Rondel 31	Order number: 51WC10DB34A EAN: 4058352616796	LP number 59345_34
	Version enclosure, PC, transparent, opal, diffuse beam Lamps LED 3000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 4250 lm Power consumption = 34.0 W Luminous efficacy = 125 lm/W	serial documentation 18.11.2022
		

Luminous intensity in cd/klm C180-0 **Imax: 297 cd/klm**

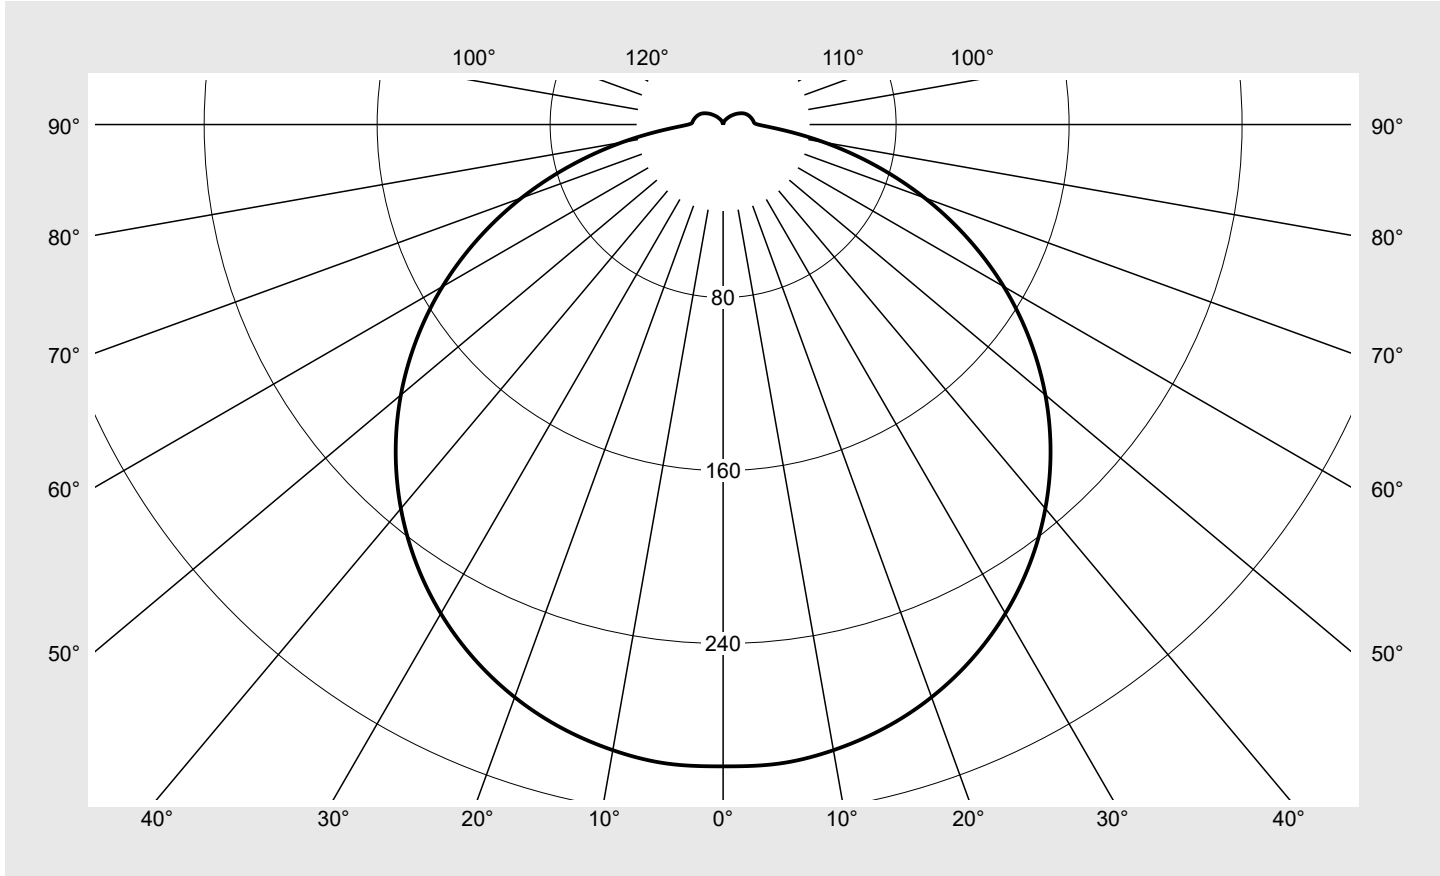

Classifications	
DIN 5040	A 4 1
CIE	N1=44 N2=75 N3=94 N4=94 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	94.2%
ϕ_o	5.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Rondel 31	Order number: 51WC10DB34A EAN: 4058352616796	LP number 59345_34
----------------------------	---	------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	296.8	1.8	1.8
5°	296.7	14.2	15.9
10°	293.8	28.0	43.9
15°	288.9	41.0	84.9
20°	281.8	52.8	137.7
25°	272.6	63.1	200.9
30°	261.1	71.6	272.4
35°	247.5	77.8	350.2
40°	231.8	81.7	431.9
45°	214.2	83.0	514.9
50°	194.6	81.7	596.6
55°	173.0	77.7	674.3
60°	149.9	71.1	745.5
65°	125.1	62.1	807.6
70°	99.2	51.1	858.7
75°	72.7	38.5	897.2
80°	47.5	25.7	922.8
85°	26.9	14.7	937.5
90°	16.1	8.8	946.3
95°	14.2	7.7	954.1
100°	13.7	7.4	961.5
105°	13.1	7.0	968.4
110°	12.4	6.4	974.8
115°	11.6	5.8	980.6
120°	10.4	4.9	985.5
125°	9.0	4.0	989.6
130°	7.6	3.2	992.7
135°	6.1	2.4	995.1
140°	4.9	1.7	996.8
145°	3.8	1.2	998.0
150°	2.9	0.8	998.8
155°	2.2	0.5	999.3
160°	1.6	0.3	999.6
165°	1.3	0.2	999.8
170°	1.2	0.1	999.9
175°	1.2	0.1	1000.0
180°	1.2	0.0	1000.0

Photometric test report

Family Rondel 31	Order number: 51WC10DB34A EAN: 4058352616796	LP number 59345_34
----------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.8	20.5	19.1	20.8	21.2	18.8	20.5	19.1	20.8	21.2
	3H	20.5	22.1	20.9	22.4	22.8	20.5	22.1	20.9	22.4	22.8
	4H	21.2	22.7	21.6	23.0	23.4	21.2	22.7	21.6	23.0	23.4
	6H	21.7	23.1	22.2	23.5	23.9	21.7	23.1	22.2	23.5	23.9
	8H	22.0	23.3	22.4	23.6	24.0	22.0	23.3	22.4	23.6	24.0
	12H	22.1	23.3	22.6	23.7	24.2	22.1	23.3	22.6	23.7	24.2
4H	2H	19.6	21.1	20.0	21.4	21.8	19.6	21.1	20.0	21.4	21.8
	3H	21.5	22.8	21.9	23.1	23.5	21.5	22.8	21.9	23.1	23.5
	4H	22.3	23.5	22.7	23.9	24.3	22.3	23.5	22.7	23.9	24.3
	6H	23.0	24.0	23.4	24.4	24.9	23.0	24.0	23.4	24.4	24.9
	8H	23.2	24.1	23.7	24.6	25.1	23.2	24.1	23.7	24.6	25.1
	12H	23.4	24.3	23.9	24.7	25.2	23.4	24.3	23.9	24.7	25.2
8H	4H	22.7	23.6	23.1	24.0	24.5	22.7	23.6	23.1	24.0	24.5
	6H	23.5	24.2	24.0	24.7	25.2	23.5	24.2	24.0	24.7	25.2
	8H	23.8	24.5	24.3	25.0	25.5	23.8	24.5	24.3	25.0	25.5
	12H	24.1	24.7	24.6	25.2	25.7	24.1	24.7	24.6	25.2	25.7
12H	4H	22.7	23.6	23.2	24.0	24.5	22.7	23.6	23.2	24.0	24.5
	6H	23.6	24.3	24.1	24.7	25.2	23.6	24.3	24.1	24.7	25.2
	8H	23.9	24.5	24.5	25.0	25.6	23.9	24.5	24.5	25.0	25.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 480	H(C0) = 30 H(C90) = 30	H(C180) = 30 H(C270) = 30
------------------------	---	---------------------------------------	---------------------------	------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	6588.9
50°	6492.8
55°	6361.8
60°	6186.4
65°	5937.0
70°	5588.9
75°	5085.1
80°	4430.3
85°	3789.3

Photometric test report

Family Rondel 31	Order number: 51WC10DB34A EAN: 4058352616796	LP number 59345_34
----------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

siteco

