
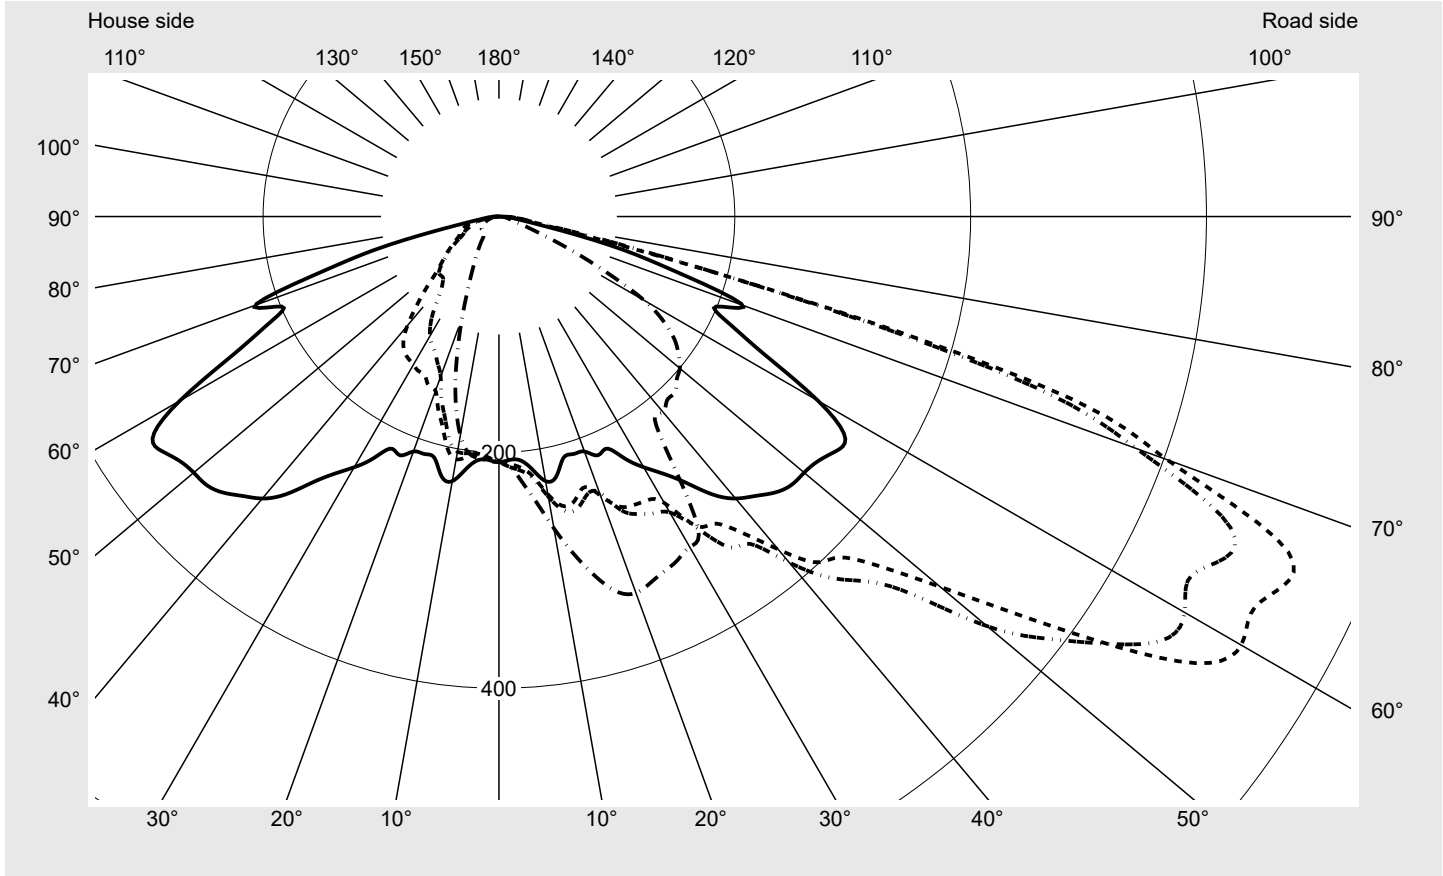


Photometric test report

Family DL® 30 LED	Order number: 5XA5132E1B08A4 EAN: 4058352058848	LP number 57201_9
	Version post-top mounting Optic direct, asymmetric wide distribution S120004 Cover PMMA cover, impact resistant, IK08 Lamps LED 3000 K CRI ≥ 80 Controlgear ECG Plus Rated values Net luminous flux = 2400 lm Power consumption = 22.5 W Luminous efficacy = 106.7 lm/W	serial documentation 18.11.2020



Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 736 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	602.8
Imax 80°	49.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 30 LED	Order number: 5XA5132E1B08A4 EAN: 4058352058848	LP number 57201_9
------------------------------------	--	------------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

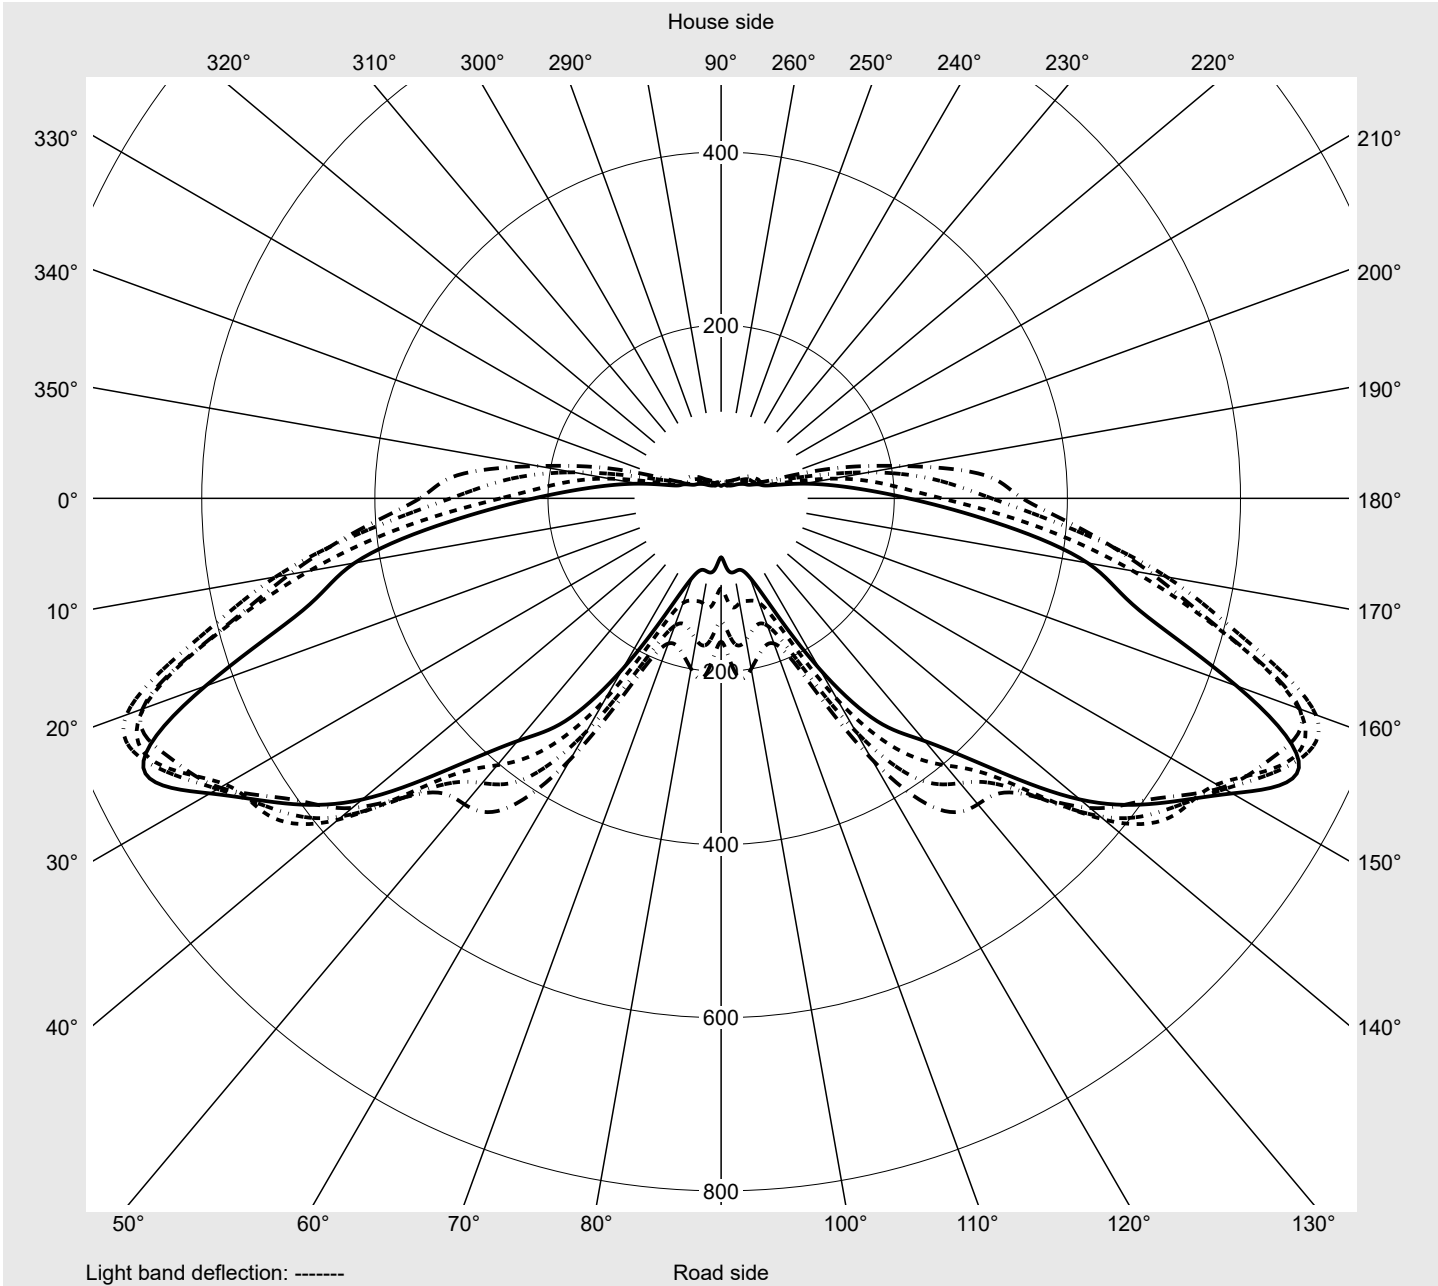

Photometric test report

Family DL® 30 LED	Order number: 5XA5132E1B08A4 EAN: 4058352058848	LP number 57201_9
------------------------------------	--	------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2
2,5°	206.6	208.1	209.9	210.5	209.9	210.2	212.6	214.7	213.8	212.9	212.0	212.0	212.6
5,0°	207.5	209.0	211.4	212.9	212.9	213.8	216.5	220.1	220.7	220.7	221.0	222.2	223.7
7,5°	216.2	218.6	221.0	221.9	221.6	222.5	224.6	228.4	229.9	230.8	232.6	234.7	238.0
10,0°	227.8	231.4	235.3	238.0	238.0	239.2	241.3	244.0	245.2	245.8	247.3	251.2	254.8
12,5°	225.5	232.6	239.8	245.5	248.2	251.5	255.4	258.6	260.1	260.4	261.3	264.3	268.5
15,0°	211.7	218.6	226.6	235.6	242.2	249.1	256.5	262.5	267.0	268.8	270.3	273.3	276.6
17,5°	211.1	218.3	224.6	232.3	236.5	240.7	247.6	255.1	262.8	269.1	273.0	276.9	281.1
20,0°	212.0	225.2	235.9	247.6	251.5	251.8	249.1	248.5	254.2	262.5	271.5	279.3	285.9
22,5°	219.2	236.2	248.2	256.5	259.8	266.1	269.1	260.4	254.8	259.2	270.3	283.8	294.8
25,0°	217.1	229.3	240.7	253.9	261.9	270.0	278.4	281.7	276.0	270.6	276.3	290.6	305.9
27,5°	231.4	238.6	246.7	252.4	258.6	271.5	283.8	294.8	305.0	300.8	296.6	302.6	318.4
30,0°	245.5	261.3	275.1	283.5	281.4	280.5	289.7	305.0	320.2	332.5	328.3	325.3	332.8
32,5°	258.3	266.1	273.0	284.7	300.8	311.0	313.7	322.0	334.3	352.5	364.5	356.7	349.5
35,0°	275.1	285.0	295.4	299.6	302.6	317.8	342.7	356.1	360.0	369.9	392.0	394.1	366.0
37,5°	296.9	310.4	317.5	323.5	330.1	337.6	349.8	377.0	392.9	400.7	401.6	424.9	386.6
40,0°	312.2	322.0	333.4	344.8	359.1	368.4	383.0	396.5	413.2	430.0	432.4	428.5	405.2
42,5°	321.4	324.1	336.4	350.4	377.6	397.7	415.3	429.4	435.7	450.9	455.1	445.2	411.1
45,0°	331.0	339.1	369.3	381.2	399.5	408.7	437.1	470.0	473.0	476.3	470.9	465.3	404.9
47,5°	336.7	364.2	421.3	438.0	447.9	439.5	473.0	499.9	515.2	485.9	486.2	463.5	414.7
50,0°	337.9	386.6	475.7	478.1	510.4	488.6	540.6	540.3	515.2	496.1	490.1	469.1	397.4
52,5°	340.9	385.7	480.5	500.5	573.2	554.1	588.4	575.6	528.0	495.2	497.0	471.2	383.3
55,0°	347.7	394.1	475.4	550.8	635.1	633.3	631.8	591.4	540.6	493.1	489.8	465.9	369.9
57,5°	348.0	420.1	506.5	603.4	711.3	705.1	668.3	606.1	556.5	481.1	461.4	438.6	347.7
60,0°	312.5	407.2	522.7	625.5	731.1	726.9	671.6	627.3	571.4	472.7	429.4	395.6	310.7
62,5°	254.8	364.5	483.2	601.6	710.1	721.2	661.1	638.4	577.4	459.9	402.5	353.1	268.5
65,0°	216.2	317.2	430.0	500.5	633.9	736.5	681.7	614.5	541.2	440.4	366.0	314.3	227.8
67,5°	199.4	307.4	407.2	439.8	571.4	713.7	663.2	558.5	498.7	388.4	315.2	251.8	179.1
70,0°	220.1	315.8	394.7	434.8	513.7	602.8	575.3	482.0	397.4	300.5	232.3	201.2	144.7
72,5°	162.4	252.7	328.6	368.1	437.1	497.8	466.2	353.4	264.3	211.1	201.5	178.8	109.1
75,0°	109.1	155.5	186.3	208.7	229.9	231.7	226.6	168.6	144.4	122.6	122.6	111.8	67.6
77,5°	50.2	64.3	81.3	83.7	74.8	74.2	90.3	93.9	77.1	65.5	52.3	48.4	29.3
80,0°	23.0	25.4	29.0	30.2	31.4	32.9	36.2	49.3	41.6	31.4	24.5	16.4	13.2
82,5°	13.8	15.8	17.9	20.3	22.1	23.3	23.0	24.2	19.1	17.3	13.5	11.4	9.6
85,0°	9.6	10.8	12.3	13.8	15.0	15.5	15.2	14.1	12.0	10.5	9.3	8.1	7.2
87,5°	5.7	6.6	7.5	8.4	9.6	10.2	10.2	9.3	8.4	7.2	6.6	6.0	5.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 30 LED	Order number: 5XA5132E1B08A4 EAN: 4058352058848	LP number 57201_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2
2,5°	213.2	212.9	212.3	212.0	211.4	211.7	207.5	208.1	210.2	207.2	204.5	204.5	207.2
5,0°	225.5	225.8	226.1	226.1	226.1	226.1	206.9	207.5	209.0	206.0	202.4	201.8	203.9
7,5°	240.7	242.5	243.1	243.7	244.3	244.6	215.6	215.3	215.6	210.8	205.4	202.4	202.4
10,0°	259.2	262.5	264.9	266.4	267.6	268.5	225.8	224.6	223.4	217.1	209.0	202.4	199.1
12,5°	274.8	280.5	285.9	289.7	291.8	293.0	221.6	218.6	216.5	210.2	201.5	193.8	188.7
15,0°	284.1	293.0	302.0	309.5	314.3	315.8	206.9	203.0	199.4	192.6	184.5	176.7	170.4
17,5°	288.8	300.2	312.8	323.8	331.0	333.7	205.4	200.0	193.5	183.3	171.3	162.1	155.5
20,0°	293.9	304.7	317.2	329.2	337.0	339.7	201.5	193.8	185.7	172.8	157.3	144.4	136.0
22,5°	302.6	310.4	319.9	328.3	334.0	336.1	202.1	191.1	186.3	175.5	155.5	135.5	123.5
25,0°	314.3	317.8	321.7	326.8	331.3	331.9	199.4	181.2	172.2	165.4	148.6	127.7	110.6
27,5°	326.5	321.4	318.7	320.2	322.9	328.3	218.9	194.7	173.1	161.8	147.7	122.6	98.7
30,0°	336.4	322.6	311.6	312.5	321.4	323.5	229.6	206.6	179.1	160.3	145.0	116.9	87.3
32,5°	332.8	315.8	291.8	284.4	295.7	314.6	236.5	211.7	186.3	163.9	142.9	107.9	74.2
35,0°	327.4	293.0	265.8	265.2	270.3	258.3	259.5	223.1	192.0	170.1	139.6	95.7	65.8
37,5°	323.5	276.0	264.0	267.0	272.4	217.1	278.4	239.5	195.6	172.8	133.1	82.2	62.8
40,0°	316.1	270.9	261.6	267.9	269.7	216.5	290.6	248.8	204.5	172.8	120.8	74.5	63.7
42,5°	319.9	263.7	258.0	267.6	271.8	211.1	310.4	255.1	207.5	170.1	104.4	70.3	65.5
45,0°	320.8	255.4	254.5	265.2	263.4	211.1	331.6	269.7	208.7	158.2	89.1	70.3	66.7
47,5°	307.4	247.6	247.9	258.9	262.5	204.5	337.6	272.7	209.9	139.6	74.8	68.8	65.2
50,0°	294.2	235.0	237.7	250.6	248.5	200.3	332.8	266.1	205.1	114.2	65.5	63.4	59.8
52,5°	272.4	217.4	224.6	238.6	241.3	192.0	330.7	258.6	197.3	89.4	59.2	57.4	54.7
55,0°	247.9	199.7	207.8	222.5	221.3	181.8	328.3	251.5	175.5	75.9	53.8	51.4	48.7
57,5°	224.3	178.5	181.8	200.0	204.5	165.7	305.9	214.7	133.4	61.3	48.4	46.0	43.7
60,0°	203.6	156.7	153.1	165.9	167.4	142.3	248.2	173.1	93.9	56.8	44.0	40.4	38.3
62,5°	168.3	128.6	122.6	122.9	124.7	104.1	189.9	131.0	64.0	49.3	39.5	35.3	32.9
65,0°	139.9	97.5	85.5	86.4	82.2	68.2	147.4	97.5	57.7	46.9	37.1	32.6	29.0
67,5°	114.5	70.6	51.7	46.6	45.7	38.9	136.3	83.4	61.6	48.7	36.2	30.5	25.7
70,0°	89.7	56.5	30.8	27.2	26.3	23.3	144.7	87.0	63.1	44.6	33.5	26.9	22.4
72,5°	59.2	30.2	21.5	17.9	15.8	14.4	101.1	65.8	53.5	38.0	31.1	24.5	20.6
75,0°	31.4	17.6	14.7	12.9	11.7	10.8	64.0	43.7	36.5	30.8	26.9	22.4	19.1
77,5°	14.7	11.7	10.2	9.6	8.4	8.4	36.8	28.7	24.5	21.5	18.8	17.3	16.4
80,0°	10.5	8.7	7.8	7.2	6.6	6.6	19.4	17.6	16.4	14.1	12.6	11.7	11.4
82,5°	7.8	6.6	6.0	5.4	5.4	5.4	12.3	11.1	10.5	9.9	9.6	9.0	8.4
85,0°	6.0	5.4	4.8	4.8	4.2	4.2	8.7	8.1	7.5	7.5	7.2	6.9	6.6
87,5°	4.8	4.8	4.2	4.2	4.2	4.2	5.7	5.4	5.4	5.4	5.4	5.4	4.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 30 LED	Order number: 5XA5132E1B08A4 EAN: 4058352058848	LP number 57201_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	208.2	0.3	0.3
2,5°	208.1	206.6	205.4	205.4	205.4	204.8	205.7	206.3	206.6	207.5	207.5	2.5	2.8
5,0°	205.1	203.6	202.7	202.7	202.7	202.4	202.7	203.9	204.8	205.7	205.7	5.1	7.9
7,5°	202.1	199.1	197.0	196.4	196.4	196.7	197.3	198.8	200.0	200.9	201.5	7.8	15.7
10,0°	195.0	189.0	183.9	182.1	181.8	182.4	183.3	185.1	186.9	188.1	188.4	10.6	26.3
12,5°	181.8	173.4	165.9	162.4	161.5	161.8	162.7	164.2	165.9	167.1	167.4	13.3	39.6
15,0°	163.0	153.4	144.4	140.2	139.0	138.7	139.3	139.9	141.4	141.7	142.3	15.3	54.9
17,5°	144.7	132.2	121.1	116.9	115.4	115.4	114.8	114.8	115.1	115.4	115.4	17.1	72.0
20,0°	124.7	110.3	100.2	96.9	95.1	94.2	93.3	92.4	92.1	91.5	91.5	18.9	90.9
22,5°	107.0	90.3	82.2	79.2	77.7	75.9	74.5	73.3	72.1	71.5	71.2	20.8	111.7
25,0°	91.8	76.2	70.3	67.9	65.5	63.7	61.6	59.5	58.0	57.1	56.8	22.6	134.4
27,5°	77.7	65.8	62.8	60.1	57.4	54.4	51.1	48.7	46.9	46.3	46.0	24.9	159.3
30,0°	67.3	61.6	58.3	55.3	51.7	47.5	43.4	40.7	38.9	38.0	38.3	27.7	187.0
32,5°	60.7	58.3	54.7	51.1	47.2	41.9	37.1	34.1	32.3	32.0	31.7	30.1	217.1
35,0°	59.8	55.9	52.0	47.8	43.4	37.4	32.0	29.3	27.8	26.3	26.3	32.7	249.7
37,5°	59.5	54.4	49.6	45.4	40.7	34.1	29.3	27.2	26.0	24.5	21.5	35.8	285.6
40,0°	59.8	53.8	48.1	43.1	38.0	32.0	28.1	26.3	25.1	23.0	20.3	39.1	324.6
42,5°	60.1	53.5	46.6	41.6	36.2	30.5	27.2	25.7	23.9	22.4	19.7	42.2	366.8
45,0°	60.1	52.6	45.2	39.8	34.4	29.3	26.3	25.1	23.6	21.5	19.1	45.5	412.3
47,5°	58.3	50.5	43.1	37.7	32.9	28.4	25.7	24.5	23.0	21.2	18.5	49.0	461.4
50,0°	54.1	46.9	40.4	35.3	30.8	26.9	24.8	23.6	22.4	20.3	18.5	52.1	513.5
52,5°	49.3	42.8	36.8	32.3	29.0	25.4	23.6	22.7	21.8	20.0	17.9	54.5	568.0
55,0°	44.3	38.3	33.2	29.3	26.3	23.6	22.1	21.8	20.9	19.1	17.9	56.7	624.7
57,5°	39.2	34.1	29.0	26.0	23.6	22.1	20.9	20.6	20.0	18.5	16.7	58.1	682.7
60,0°	34.1	29.3	25.4	23.0	21.2	19.7	19.1	19.1	18.8	17.3	16.1	57.1	739.8
62,5°	29.3	25.1	21.8	19.7	18.8	17.9	17.3	17.9	17.6	16.4	15.5	53.8	793.6
65,0°	25.4	21.8	19.4	17.9	17.0	16.1	16.1	16.1	15.8	15.0	14.4	49.6	843.2
67,5°	22.4	19.7	17.3	16.1	15.5	15.0	14.4	14.4	14.4	13.5	12.6	45.3	888.4
70,0°	20.0	17.6	15.8	15.0	13.8	13.2	13.2	12.9	12.6	11.7	11.4	40.3	928.7
72,5°	17.6	15.8	14.1	13.2	12.3	11.7	11.4	11.1	10.8	10.2	10.2	32.3	961.1
75,0°	16.4	14.4	12.3	11.4	10.8	10.2	9.6	9.6	9.3	8.7	8.4	18.7	979.7
77,5°	14.4	12.3	10.5	9.6	9.0	8.4	8.4	7.8	7.5	7.2	7.2	9.0	988.7
80,0°	11.4	9.9	8.7	7.8	7.2	7.2	6.6	6.3	6.0	6.0	6.0	4.6	993.3
82,5°	8.1	7.5	7.2	6.6	6.0	6.0	5.4	5.4	5.4	4.8	4.8	3.0	996.3
85,0°	6.0	6.0	5.4	5.4	4.8	4.8	4.2	4.2	4.2	4.2	4.2	2.2	998.5
87,5°	4.8	4.8	4.2	4.2	4.2	4.2	4.2	3.9	3.9	3.6	3.6	1.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 30 LED	Order number: 5XA5132E1B08A4 EAN: 4058352058848	LP number 57201_9
-----------------------------	--	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux [%]	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	2400	22.5	23.1	22.8
95	241	2277	21.2	21.8	21.5
90	229	2164	20.1	20.6	20.4
85	216	2041	18.8	19.3	19.0
80	203	1918	17.6	18.0	17.8
75	190	1795	16.4	16.8	16.6
70	178	1682	15.4	15.7	15.6
65	165	1559	14.2	14.6	14.4
60	152	1436	13.1	13.5	13.3
55	140	1323	12.2	12.5	12.4
50	127	1200	11.2	11.4	11.3
45	114	1077	10.1	10.3	10.2
40	102	964	9.2	9.4	9.3
35	89	841	8.3	8.4	8.4
30	76	718	7.3	7.4	7.4
25	63	595	6.3	6.4	6.4
20	51	482	5.3	5.4	5.4
19	47	444	4.8	4.9	4.8