
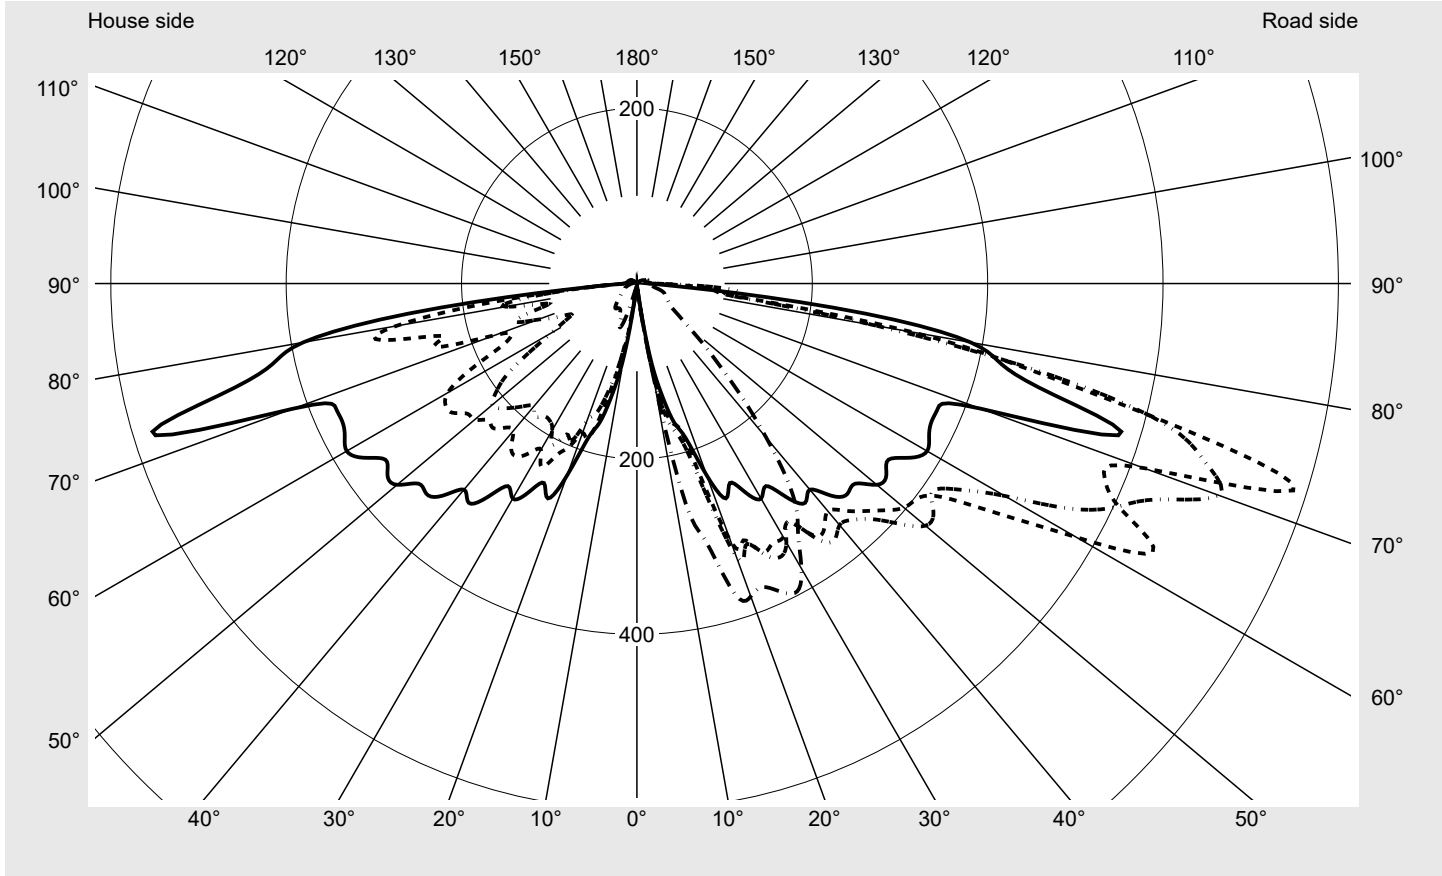


Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
	Version post-top- or mounting to wall arm Optic asymmetric, extremely wide distribution (P1.0a) Cover cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1520 lm Power consumption = 12.9 W Luminous efficacy = 117.8 lm/W	serial documentation 08.07.2022



Luminous intensity in cd/klm C180-0 C190-10 C195-15 C270-90 **Imax: 785 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	96.3%
Eta 90° - 180°	3.7%


Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	706.0
Imax 80°	386.5
Imax 90°	16.1
Imax >90°	15.2
Imax >95°	14.3

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
------------------------------------	--	-------------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

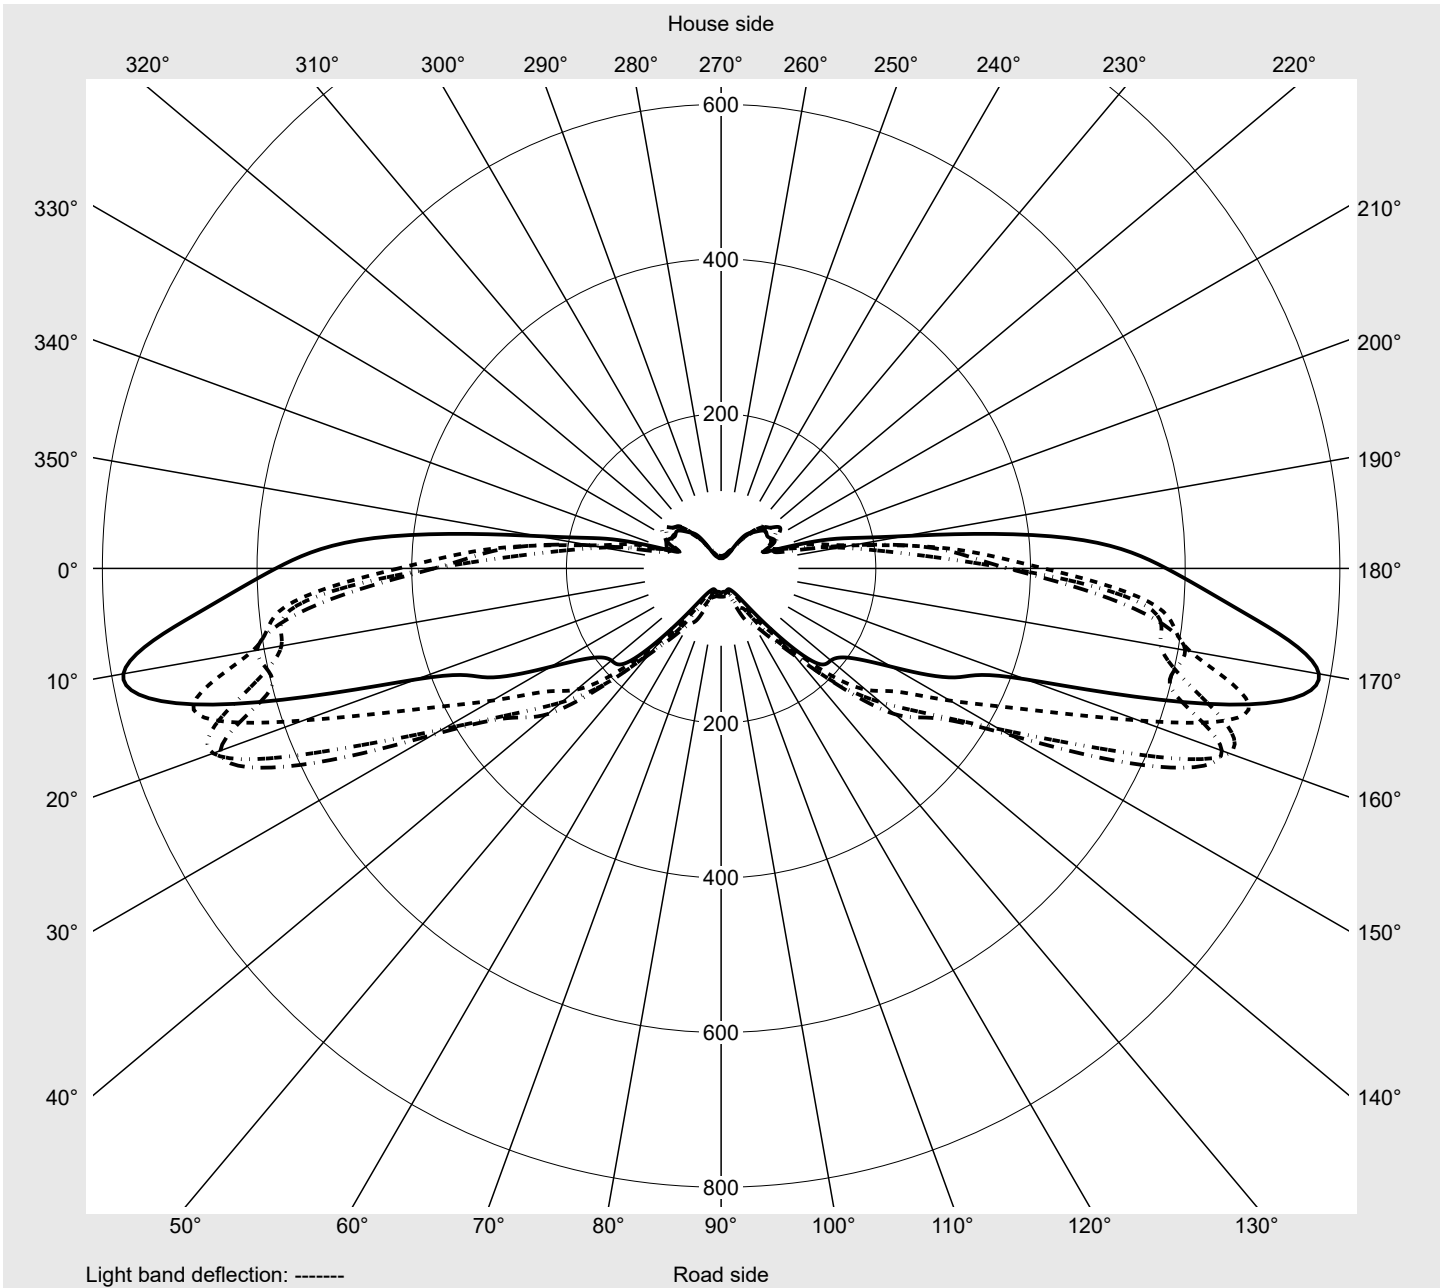

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
2,5°	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.6	9.6	9.9	9.9	9.9	10.2
5,0°	9.9	10.2	10.2	10.5	10.5	10.9	11.2	11.2	11.2	11.5	11.8	12.1	12.1
7,5°	14.0	16.1	18.3	20.5	22.3	23.9	25.7	28.8	29.5	31.3	30.7	31.6	31.3
10,0°	81.3	90.3	98.0	103.3	107.0	108.3	105.5	106.4	103.0	103.9	99.9	105.2	106.4
12,5°	128.4	129.4	148.9	157.3	159.8	157.3	150.1	156.0	160.1	170.0	165.6	182.4	208.8
15,0°	164.1	157.0	166.6	177.7	158.8	173.7	208.8	211.9	217.4	248.2	248.8	295.3	311.1
17,5°	184.6	184.3	197.9	224.3	258.1	304.9	300.9	320.7	331.9	332.5	334.1	347.4	333.5
20,0°	233.0	271.7	313.6	331.6	317.6	328.8	342.8	332.5	376.0	365.1	368.2	372.5	376.6
22,5°	265.2	296.9	317.0	323.5	307.7	322.9	338.4	335.3	395.8	382.5	395.8	396.7	395.5
25,0°	250.9	294.4	337.5	339.0	333.5	337.5	338.1	335.3	397.4	375.6	387.4	385.9	389.9
27,5°	268.9	307.1	334.4	352.1	344.9	357.3	349.0	340.6	410.4	366.0	386.8	384.0	378.8
30,0°	283.2	309.9	333.8	340.9	349.0	365.4	357.0	344.6	389.0	352.7	364.5	363.9	365.1
32,5°	273.9	301.5	322.3	321.4	325.1	342.5	347.1	336.9	376.3	341.8	342.1	344.9	336.9
35,0°	297.5	335.6	350.5	353.6	348.4	344.6	337.8	329.7	362.3	334.7	315.2	311.4	290.7
37,5°	315.2	341.2	351.1	369.4	370.7	365.7	350.8	335.3	359.2	330.0	301.8	283.2	258.4
40,0°	306.8	335.0	338.7	359.5	372.2	370.1	359.8	348.7	349.9	321.7	283.2	247.5	226.4
42,5°	328.2	343.4	351.5	365.4	372.9	369.8	359.8	334.7	327.9	296.9	262.4	221.2	210.3
45,0°	339.4	360.1	367.0	380.0	374.7	364.5	346.8	314.5	308.6	268.9	238.2	192.9	184.6
47,5°	337.8	371.0	382.8	405.4	380.0	371.0	346.2	309.6	304.3	250.3	214.7	182.1	169.7
50,0°	357.0	406.4	397.7	429.6	404.8	404.2	359.5	306.8	298.4	225.2	180.2	169.7	158.2
52,5°	358.6	432.7	402.9	426.2	425.3	433.0	385.3	313.0	291.6	208.5	151.7	150.8	142.4
55,0°	350.2	440.8	424.3	412.3	424.3	431.8	384.0	309.9	286.6	206.6	148.6	143.9	131.2
57,5°	369.8	439.9	487.9	437.7	424.3	425.3	368.5	313.0	287.6	203.8	154.5	133.7	111.1
60,0°	382.2	466.2	578.5	484.5	455.4	466.2	366.3	313.9	282.6	199.5	158.5	118.8	94.3
62,5°	375.6	496.3	663.2	555.6	575.4	547.2	384.0	330.7	294.4	199.1	161.3	112.6	94.6
65,0°	371.0	520.8	609.2	603.0	688.9	601.5	430.2	337.5	293.1	212.8	145.5	107.6	83.8
67,5°	371.6	550.6	577.3	643.3	698.9	556.5	416.0	327.9	269.3	209.7	141.1	98.0	62.3
70,0°	417.2	565.5	615.4	706.0	574.8	429.9	341.8	277.9	243.8	188.0	123.1	82.5	47.8
72,5°	575.7	682.4	784.8	680.3	419.4	333.5	254.4	201.3	185.2	172.2	109.5	59.6	39.1
75,0°	494.5	544.1	651.7	626.9	398.6	272.0	175.9	134.0	134.3	134.3	96.2	53.7	31.6
77,5°	426.2	382.8	466.2	485.1	282.0	177.1	128.4	119.4	98.6	75.4	49.0	33.2	23.6
80,0°	386.5	333.5	318.9	278.6	192.9	126.9	98.3	97.7	69.5	47.8	34.4	24.8	19.9
82,5°	263.0	191.4	121.0	112.3	104.8	85.3	76.6	62.7	32.3	23.6	24.8	21.1	18.3
85,0°	85.6	72.3	94.0	115.1	89.0	67.3	54.3	42.5	22.6	18.3	16.8	17.1	17.1
87,5°	27.3	39.1	59.9	84.7	65.8	39.1	35.7	27.3	18.6	16.4	16.1	16.1	16.1
90,0°	14.0	14.9	15.5	16.1	15.8	15.2	15.5	15.2	15.2	15.2	15.5	15.2	15.5
92,5°	12.7	13.3	14.3	14.3	14.3	14.6	14.9	14.9	14.6	14.9	14.9	14.9	14.9
95,0°	12.1	12.7	13.3	13.6	13.6	14.0	14.3	14.3	14.3	14.3	14.3	14.3	14.6
97,5°	11.5	12.1	12.7	13.0	13.3	13.3	13.6	13.6	13.6	13.6	13.6	14.0	14.3
100,0°	10.9	11.8	12.1	12.7	12.7	12.7	13.0	13.3	13.3	13.3	13.3	13.3	13.6
102,5°	10.5	11.2	11.5	12.1	12.1	12.4	12.7	12.7	12.7	12.7	13.0	13.0	13.3
105,0°	10.2	10.5	11.5	11.5	11.8	12.1	12.1	12.1	12.4	12.7	12.7	12.7	12.7
107,5°	9.9	10.5	10.9	10.9	11.5	11.5	11.5	12.1	12.1	12.1	12.1	12.1	12.4
110,0°	9.3	9.9	10.2	10.9	10.9	11.2	11.5	11.5	11.5	11.8	12.1	12.1	12.1
112,5°	9.3	9.6	10.2	10.2	10.5	10.9	10.9	11.2	11.2	11.5	11.5	11.8	11.8

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
2,5°	10.2	10.2	10.2	10.5	10.5	10.5	9.3	9.3	9.3	9.3	9.0	9.3	9.3
5,0°	12.4	12.7	13.0	13.3	13.3	13.6	9.9	9.9	9.6	9.3	9.3	9.3	9.6
7,5°	30.7	30.7	29.5	28.5	28.5	27.9	12.4	11.2	10.5	9.9	9.9	9.9	9.9
10,0°	110.4	113.2	109.8	109.2	110.7	106.7	68.9	59.6	48.7	38.5	27.0	19.5	13.3
12,5°	215.3	222.7	242.0	251.3	259.9	256.8	109.2	100.2	96.2	96.8	99.6	68.9	54.0
15,0°	311.7	322.9	328.5	319.5	322.9	304.6	144.6	149.2	129.4	129.0	121.6	128.7	95.5
17,5°	339.7	349.6	361.7	375.6	380.0	371.0	167.2	184.6	156.0	143.0	129.0	107.0	105.8
20,0°	389.3	389.0	387.4	378.4	385.9	379.7	184.9	181.5	166.6	137.7	109.2	103.9	104.2
22,5°	401.7	399.5	385.6	378.1	385.3	374.7	204.4	201.3	193.6	157.6	135.6	128.1	125.3
25,0°	387.1	381.5	385.0	389.9	401.1	387.7	219.9	215.6	189.8	145.5	122.8	125.0	118.2
27,5°	360.4	369.4	383.7	394.6	408.8	395.8	264.3	235.7	207.8	153.9	134.0	133.4	119.7
30,0°	342.8	354.9	368.5	371.3	383.1	375.3	261.5	219.0	193.3	158.2	141.5	135.6	124.7
32,5°	319.2	329.7	338.4	342.1	348.0	342.5	269.6	229.5	185.2	160.4	151.7	139.9	115.4
35,0°	285.1	299.3	304.9	311.1	322.3	318.3	283.8	240.4	184.9	160.1	149.8	132.1	103.0
37,5°	257.8	270.2	274.8	277.3	283.5	281.0	291.9	235.4	190.8	170.3	149.5	107.3	101.7
40,0°	233.3	239.8	237.9	234.2	233.3	229.5	289.7	219.3	183.3	170.6	128.7	89.3	99.3
42,5°	215.9	217.4	206.3	195.4	187.4	181.2	311.7	223.0	189.5	182.1	99.9	83.1	94.9
45,0°	182.4	187.4	173.7	156.0	145.2	136.5	322.6	232.6	200.4	163.8	72.9	80.0	90.6
47,5°	152.0	154.8	142.1	122.5	110.4	104.2	326.0	230.5	210.6	124.1	67.3	77.2	85.9
50,0°	134.6	125.9	113.2	95.2	82.8	76.9	347.7	241.6	215.3	85.3	67.9	75.4	83.4
52,5°	121.9	107.0	93.4	76.0	67.3	60.8	351.1	243.8	201.9	77.9	69.5	75.1	80.3
55,0°	105.5	88.7	77.5	62.7	55.8	49.6	352.1	256.8	180.5	81.0	77.2	76.6	78.2
57,5°	91.8	73.2	63.3	50.9	45.3	44.7	360.1	258.7	144.2	85.6	85.3	77.9	80.7
60,0°	81.6	60.2	53.4	43.4	41.6	41.6	370.4	249.1	112.3	85.0	88.4	82.2	85.3
62,5°	68.9	48.7	43.4	39.4	38.8	39.1	349.0	216.5	92.4	81.0	83.1	85.9	92.7
65,0°	72.9	46.2	38.5	36.6	36.6	36.6	284.8	172.5	82.8	73.8	78.2	85.0	92.4
67,5°	55.5	39.1	35.1	34.4	34.7	34.7	231.4	155.1	101.7	73.2	71.7	78.8	85.9
70,0°	35.1	34.4	31.3	32.6	32.9	33.5	295.0	171.8	120.4	62.3	67.6	74.1	75.1
72,5°	31.6	28.5	29.2	30.4	30.4	31.0	450.4	240.7	145.2	64.2	73.2	76.6	72.9
75,0°	24.8	24.8	25.7	26.7	26.7	26.7	478.6	230.5	124.7	53.0	60.2	66.7	66.1
77,5°	22.6	22.6	23.0	23.3	22.3	21.1	411.6	298.1	105.5	48.1	58.9	61.1	61.1
80,0°	20.8	20.8	20.5	19.9	19.2	18.6	227.4	279.2	152.0	49.0	53.0	55.5	56.1
82,5°	18.6	18.9	18.6	17.7	17.4	17.4	154.8	175.0	130.9	42.8	44.4	46.2	41.3
85,0°	17.4	17.4	17.1	17.1	16.8	16.8	108.3	68.2	69.2	37.8	34.7	32.3	32.0
87,5°	16.1	16.1	16.1	15.8	16.1	16.1	47.5	25.1	32.9	27.0	27.0	28.5	27.0
90,0°	15.5	15.2	15.2	15.2	15.2	15.5	13.6	13.6	14.0	14.3	14.0	13.6	12.1
92,5°	14.9	14.9	14.9	15.2	14.9	14.9	12.4	12.4	11.5	11.2	10.5	9.9	9.3
95,0°	14.6	14.6	14.6	14.6	14.6	14.9	11.8	11.5	10.9	10.5	9.9	9.3	8.7
97,5°	14.0	14.0	14.0	14.3	14.3	14.3	11.2	10.9	10.5	10.2	9.6	8.7	8.7
100,0°	13.6	14.0	14.0	13.6	13.6	13.6	10.9	10.9	10.2	9.6	9.3	8.7	8.1
102,5°	13.3	13.3	13.3	13.3	13.6	13.0	10.2	10.2	9.9	9.3	8.7	8.4	8.1
105,0°	12.7	13.0	13.0	13.0	13.0	13.0	10.2	9.6	9.3	9.0	8.4	8.1	7.4
107,5°	12.7	12.7	12.7	12.7	13.0	13.0	9.6	9.6	9.0	8.7	8.1	7.4	7.4
110,0°	12.1	12.4	12.4	12.4	12.4	12.4	9.0	9.0	8.7	8.4	8.1	7.4	7.1
112,5°	11.8	11.8	12.1	12.4	12.4	12.4	9.0	8.7	8.4	8.1	7.4	7.1	6.8

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	0.0	0.0
2,5°	9.3	9.3	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.9	9.9	0.1	0.1
5,0°	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.9	0.3	0.4
7,5°	9.9	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.3	0.7	1.0
10,0°	11.8	10.9	10.5	10.2	9.9	9.6	9.6	9.6	9.6	9.6	9.3	3.1	4.1
12,5°	44.7	36.9	25.7	18.0	15.5	10.5	9.9	9.6	9.6	9.6	9.3	6.9	11.0
15,0°	77.5	65.5	56.8	43.1	34.7	35.4	23.0	21.7	14.0	12.1	10.5	11.4	22.4
17,5°	81.0	82.5	92.1	75.7	59.9	58.9	42.5	37.2	39.1	36.9	34.1	16.6	39.1
20,0°	80.0	73.2	75.1	91.2	67.0	60.8	54.9	55.8	54.9	50.6	51.5	21.2	60.2
22,5°	109.8	88.1	79.7	71.0	70.4	56.8	53.4	54.0	53.0	53.0	51.5	24.7	84.9
25,0°	98.6	77.9	69.5	54.6	51.5	53.4	51.5	49.9	46.5	45.9	42.8	27.0	111.9
27,5°	96.5	73.2	56.5	50.6	49.6	50.6	48.1	44.4	42.5	43.1	42.8	30.0	141.9
30,0°	85.9	63.9	61.1	56.5	54.0	52.7	47.5	45.3	41.6	39.1	38.5	31.7	173.6
32,5°	76.6	69.8	67.0	64.2	61.1	57.1	47.8	42.8	40.3	36.6	35.4	32.7	206.3
35,0°	92.1	87.2	77.5	70.1	64.2	56.8	49.0	43.7	39.7	36.6	34.7	34.4	240.7
37,5°	99.0	94.6	86.5	80.0	71.3	62.7	51.8	43.7	39.4	36.9	35.4	36.0	276.8
40,0°	95.5	91.2	83.8	76.9	69.2	60.5	50.3	43.7	40.6	38.5	37.2	36.0	312.8
42,5°	92.1	85.6	77.5	71.0	63.6	57.1	46.8	41.9	39.1	38.2	36.6	36.4	349.2
45,0°	88.7	83.8	75.7	68.6	60.5	51.8	42.8	38.5	35.7	34.1	33.5	36.1	385.3
47,5°	85.3	81.0	72.9	65.8	56.8	48.1	39.1	34.1	31.6	31.3	30.4	36.2	421.5
50,0°	83.4	79.4	71.3	62.0	52.7	42.8	34.4	30.7	29.2	28.2	27.3	36.9	458.4
52,5°	79.4	75.7	68.9	59.6	48.4	39.7	31.3	27.3	25.4	25.1	24.2	37.5	495.9
55,0°	76.3	72.0	67.0	55.8	44.7	36.3	28.2	25.4	23.3	22.6	22.3	37.9	533.8
57,5°	76.6	70.1	65.5	52.1	41.3	33.2	25.7	23.0	21.4	20.8	20.5	38.8	572.6
60,0°	74.8	69.5	64.2	48.7	37.5	30.4	23.9	21.1	19.5	18.9	18.6	40.6	613.2
62,5°	79.4	74.1	62.7	46.5	34.1	27.9	22.0	19.9	18.3	17.7	17.4	43.6	656.9
65,0°	81.9	77.2	61.4	45.3	30.7	25.1	20.5	18.3	17.1	16.4	16.1	45.0	701.9
67,5°	81.9	75.4	61.1	42.8	27.3	22.6	18.9	17.1	15.8	15.2	14.9	44.5	746.4
70,0°	74.4	75.4	58.3	44.4	28.2	20.5	17.4	15.8	14.6	14.3	14.3	43.2	789.5
72,5°	74.8	68.2	60.2	50.3	28.8	18.9	16.1	14.6	13.3	13.3	13.0	44.7	834.2
75,0°	69.2	58.0	48.4	38.2	23.6	17.4	14.9	13.3	12.7	12.1	11.8	38.9	873.1
77,5°	62.7	46.2	41.9	26.1	19.2	15.2	13.3	12.1	11.2	10.5	10.5	31.1	904.1
80,0°	49.9	37.8	28.8	21.4	17.4	14.0	12.1	10.9	9.9	9.3	9.3	24.2	928.4
82,5°	34.4	27.0	22.6	21.1	16.8	13.0	11.5	9.9	8.7	8.7	8.1	15.5	943.8
85,0°	25.7	22.3	19.9	19.5	15.8	12.1	10.2	8.7	8.1	7.4	7.4	10.2	954.0
87,5°	21.7	18.9	16.8	15.8	13.0	9.9	8.7	7.4	7.1	6.8	6.8	6.8	960.8
90,0°	11.2	9.6	9.3	9.3	7.8	6.5	5.9	5.9	5.6	5.6	5.6	3.5	964.3
92,5°	8.7	8.1	7.4	6.8	6.2	5.6	5.6	5.0	5.0	5.0	5.0	3.1	967.4
95,0°	8.1	7.8	7.1	6.8	6.2	5.6	5.3	5.0	5.0	5.0	5.0	3.0	970.5
97,5°	8.1	7.4	6.8	6.2	6.2	5.6	5.3	5.0	5.0	4.7	5.0	2.9	973.3
100,0°	7.8	7.4	6.8	6.2	5.9	5.6	5.0	5.0	5.0	4.7	5.0	2.8	976.1
102,5°	7.4	6.8	6.8	6.2	5.6	5.6	5.0	5.0	4.7	4.3	4.3	2.7	978.8
105,0°	7.4	6.8	6.2	6.2	5.6	5.0	5.0	4.7	4.3	4.3	4.3	2.5	981.3
107,5°	6.8	6.8	6.2	5.6	5.6	5.0	5.0	4.7	4.3	4.3	4.3	2.4	983.8
110,0°	6.8	6.2	5.9	5.6	5.0	5.0	5.0	4.3	4.3	4.3	4.3	2.3	986.1
112,5°	6.2	6.2	5.6	5.6	5.0	5.0	4.3	4.3	4.3	4.3	4.3	2.2	988.3

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.7	9.0	9.6	9.9	10.2	10.5	10.5	10.9	10.9	11.2	11.2	11.2	11.5
117,5°	8.4	9.0	9.3	9.6	9.9	9.9	10.2	10.2	10.5	10.5	10.9	11.2	11.2
120,0°	7.8	8.4	8.7	9.0	9.3	9.3	9.6	9.9	9.9	9.9	10.5	10.5	10.5
122,5°	7.1	7.4	8.1	8.1	8.4	8.7	8.7	8.7	9.3	9.3	9.3	9.6	9.9
125,0°	5.6	6.2	6.5	6.5	6.5	6.8	7.1	7.1	7.1	7.4	7.4	7.8	7.8
127,5°	4.0	4.3	4.3	4.7	4.7	4.7	4.7	4.7	4.7	4.7	5.0	5.3	5.3
130,0°	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	3.1	2.8	3.1
132,5°	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
135,0°	1.9	1.9	1.9	2.2	2.2	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
137,5°	1.6	1.6	1.9	1.9	1.9	1.9	1.6	1.6	1.6	1.6	1.6	1.6	1.6
140,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	1.2
142,5°	0.9	0.9	0.6	0.9	0.9	0.9	0.6	0.6	0.6	0.6	0.6	0.6	0.6
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	11.8	11.8	11.8	11.8	11.8	11.8	8.4	8.4	8.1	7.4	7.4	6.8	6.8
117,5°	11.2	11.5	11.5	11.8	11.8	11.8	8.4	8.1	7.4	7.4	6.8	6.8	6.2
120,0°	10.5	11.2	11.2	11.2	11.2	11.2	7.8	7.4	7.1	6.8	6.8	6.2	6.2
122,5°	9.9	9.9	9.9	10.2	10.2	9.9	6.8	6.8	6.5	6.2	5.9	5.6	5.3
125,0°	7.8	8.1	8.1	8.1	8.1	8.1	5.6	5.3	5.3	5.0	4.7	4.7	4.3
127,5°	5.3	5.3	5.3	5.3	5.6	5.6	3.7	3.7	3.7	3.4	3.4	3.4	3.1
130,0°	3.1	3.1	3.1	3.1	3.1	3.1	2.5	2.5	2.5	2.5	2.5	2.5	2.5
132,5°	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.2	2.2	2.2	2.2
135,0°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
137,5°	1.6	1.6	1.6	1.6	1.6	1.2	1.2	1.6	1.6	1.6	1.6	1.6	1.9
140,0°	0.9	0.9	0.9	1.2	0.9	0.6	1.2	1.2	1.2	1.2	1.2	1.2	1.2
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	1.2	0.9	1.2	0.9
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.2	5.9	5.6	5.0	5.0	4.3	4.3	4.3	4.3	4.0	4.3	2.1	990.4
117,5°	5.6	5.6	5.0	5.0	4.3	4.3	4.0	3.7	3.7	3.7	3.7	2.0	992.4
120,0°	5.6	5.3	5.0	4.3	4.3	4.3	3.7	3.7	3.7	3.7	3.7	1.8	994.2
122,5°	5.0	5.0	4.3	4.3	4.0	3.7	3.7	3.7	3.4	3.7	3.1	1.6	995.9
125,0°	4.0	4.0	3.7	3.4	3.4	3.1	3.1	3.1	2.8	2.8	3.1	1.3	997.1
127,5°	3.1	2.8	2.8	2.5	2.5	2.5	2.5	2.5	2.2	1.9	1.9	0.9	998.0
130,0°	2.5	2.5	2.5	2.2	2.2	2.2	1.9	1.9	1.9	1.9	1.9	0.5	998.5
132,5°	2.2	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	0.5	999.0
135,0°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.2	1.9	0.4	999.4
137,5°	1.6	1.6	1.6	1.6	1.6	1.6	1.2	1.2	1.2	1.2	1.2	0.3	999.6
140,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.8
142,5°	0.9	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425BF14H EAN: 4058352836514	LP number 58893_26
------------------------------------	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1520	12.9	13.3	13.1
95	241	252	1442	12.2	12.6	12.4
90	229	250	1370	11.5	11.9	11.7
85	216	248	1293	10.7	11.1	10.9
80	203	246	1215	10.1	10.5	10.3
75	190	243	1137	9.4	9.8	9.6
70	178	241	1065	8.9	9.1	9.0
65	165	238	987	8.2	8.4	8.3
60	152	235	910	7.6	7.8	7.7
55	140	232	838	7.0	7.2	7.1
50	127	229	760	6.4	6.6	6.5
45	114	225	682	5.8	6.0	5.9
40	102	221	610	5.3	5.4	5.4
35	89	216	533	4.8	4.9	4.8
30	76	210	455	4.3	4.3	4.3
25	63	203	377	3.7	3.8	3.8
24	60	201	359	3.5	3.7	3.6