


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
	Version post-top or side-entry mounting, Smart Interface down Optic asymmetric, wide distribution (ST1.0a G), Back Light Control (BLC) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG-Smart Interface Rated values Net luminous flux = 11290 lm Power consumption = 87.3 W Luminous efficacy = 129.3 lm/W	serial documentation 23.08.2022



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 530 cd/klm**

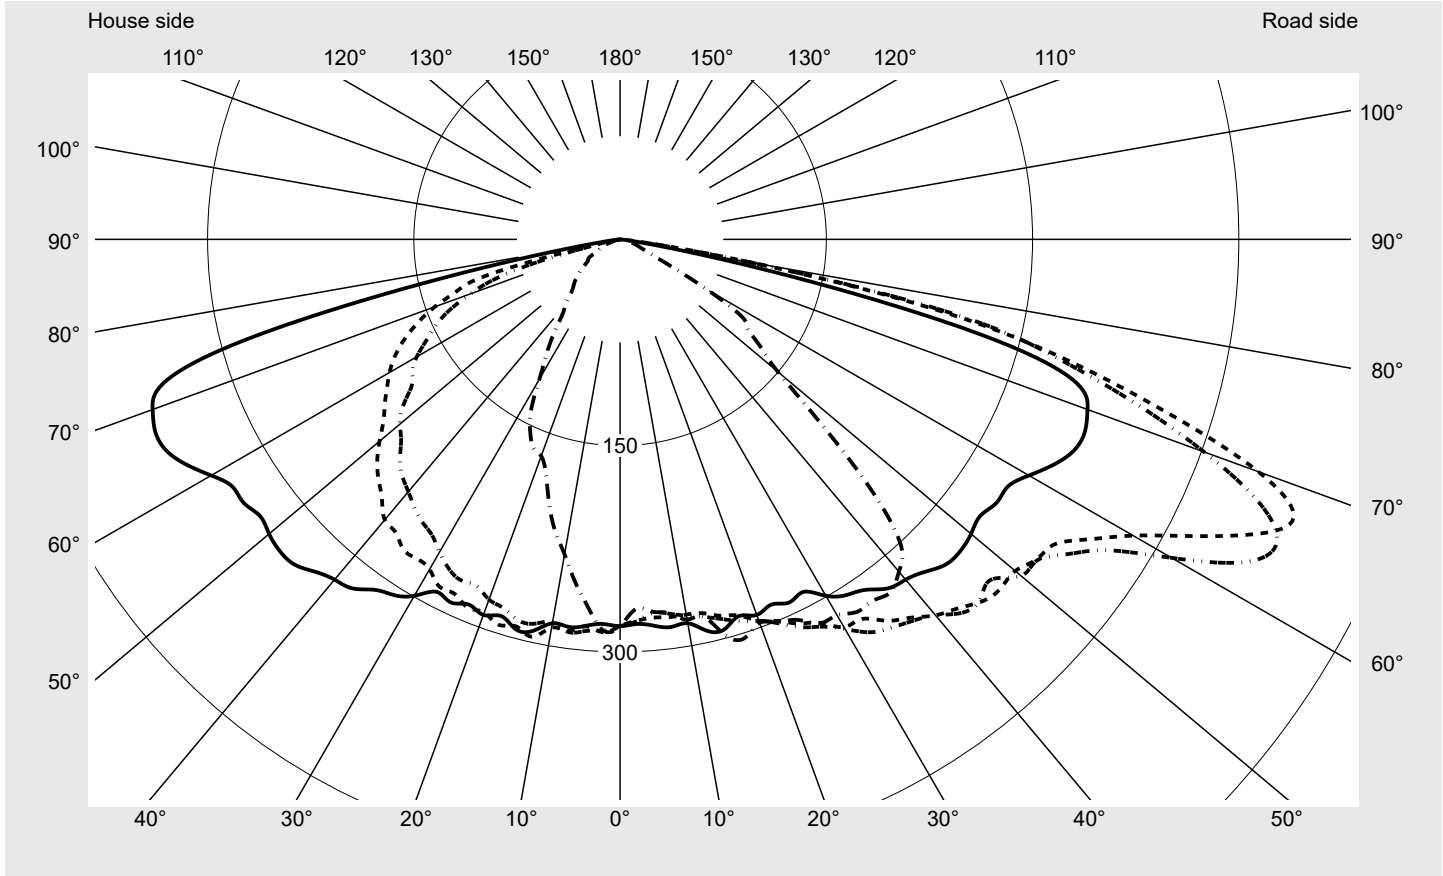

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	494.0
Imax 80°	97.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

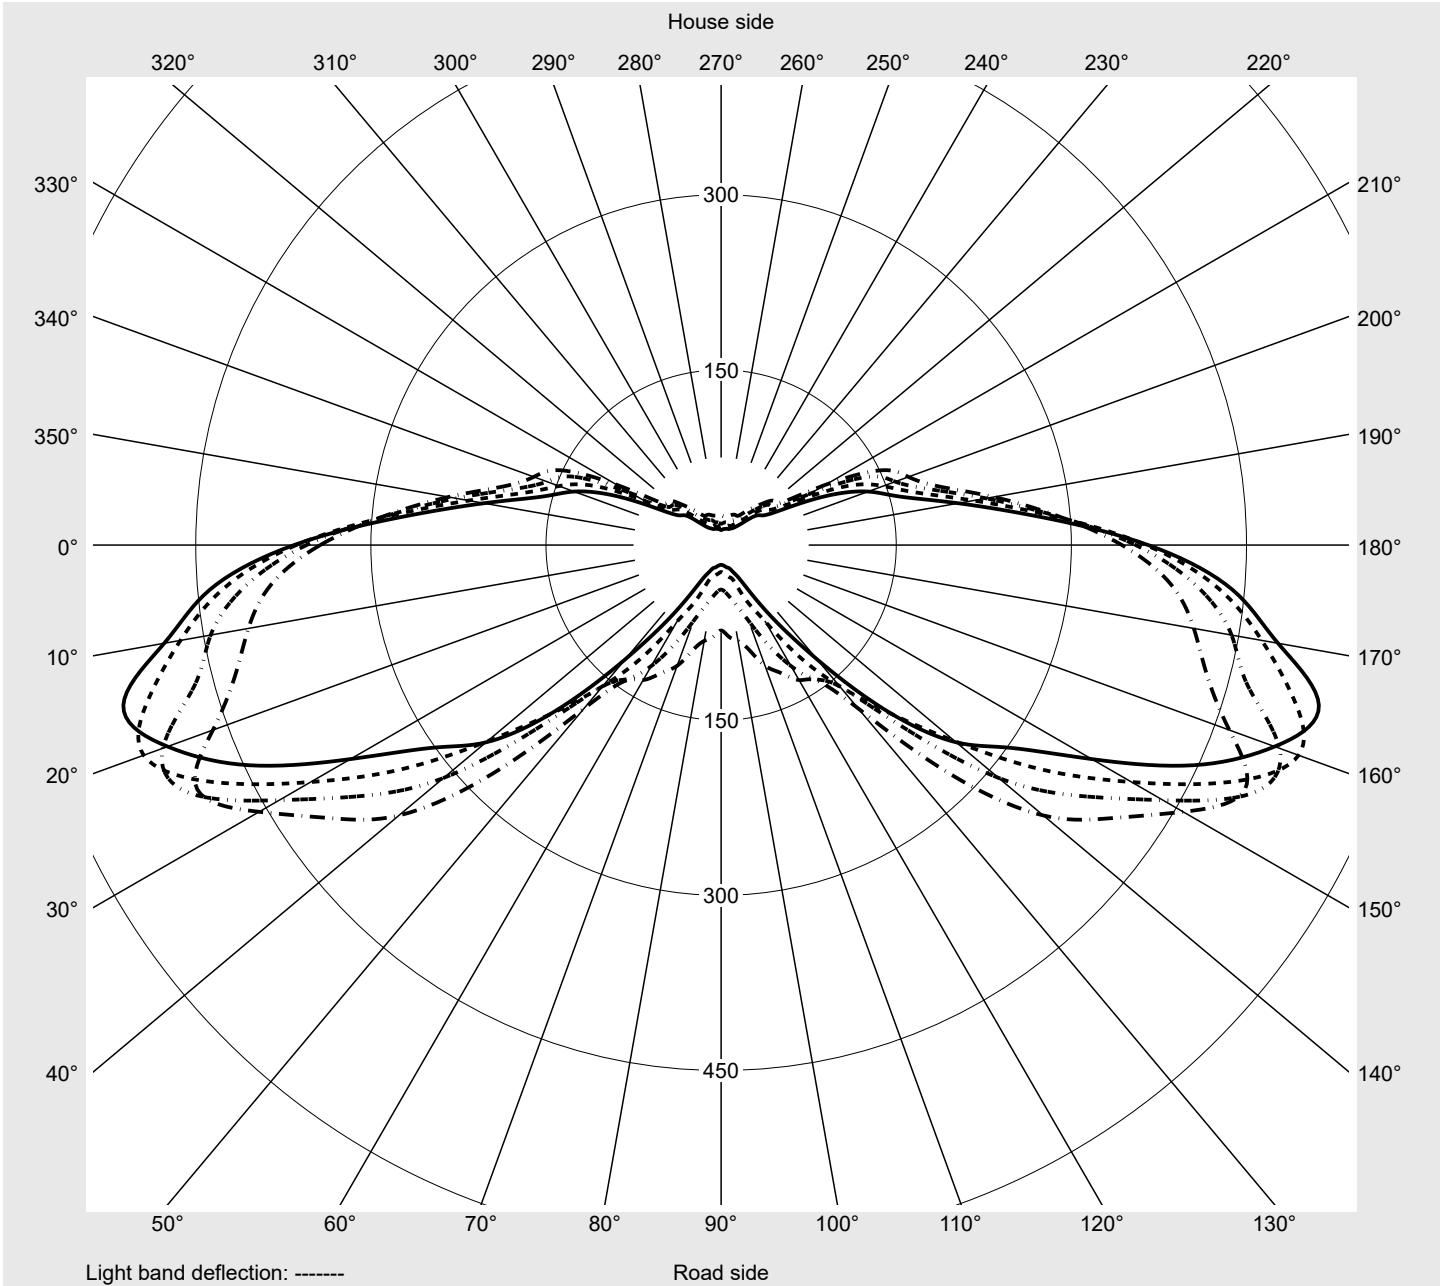

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	280.0	279.5	279.2	277.7	277.9	277.2	277.5	277.2	275.6	274.9	274.1	272.2	271.9
5,0°	282.0	279.0	278.0	276.1	272.9	271.2	268.2	269.1	269.6	270.1	269.8	269.1	270.9
7,5°	284.3	282.5	280.2	277.0	274.6	269.8	270.2	271.2	274.2	276.9	275.3	277.1	278.7
10,0°	283.5	278.8	278.9	277.1	277.9	275.3	275.0	274.3	277.9	276.8	278.3	280.6	285.6
12,5°	291.5	283.0	278.6	278.5	281.2	284.6	289.1	289.5	285.3	284.2	286.1	285.7	287.3
15,0°	293.5	287.3	282.6	283.4	285.9	287.5	291.2	291.6	289.1	290.7	289.2	288.4	292.5
17,5°	287.2	283.0	284.7	286.8	291.0	295.5	294.3	295.6	291.9	292.9	293.3	291.2	291.8
20,0°	290.7	291.7	292.2	295.1	295.4	298.3	298.7	298.0	297.8	295.7	296.5	296.5	299.4
22,5°	287.5	290.7	295.2	300.3	302.4	303.2	304.2	303.3	305.0	303.4	306.4	303.6	308.2
25,0°	291.3	293.7	300.6	308.4	311.2	310.2	305.1	310.6	315.6	314.0	311.9	310.8	313.1
27,5°	289.0	299.0	309.0	314.3	317.6	319.7	315.4	321.2	315.6	313.1	310.8	312.4	317.4
30,0°	299.3	307.0	319.6	325.6	327.2	326.9	321.7	323.1	317.8	323.1	319.9	314.6	319.2
32,5°	306.6	316.1	327.3	327.3	338.8	336.8	328.0	332.2	327.0	328.7	324.9	323.3	321.4
35,0°	311.1	323.0	331.4	338.6	344.6	341.3	340.8	340.2	334.2	335.6	333.1	338.0	343.9
37,5°	319.9	329.0	340.9	346.8	349.7	351.4	343.0	340.3	343.7	357.2	349.0	349.3	350.7
40,0°	323.1	341.3	350.9	356.9	356.9	355.3	348.8	348.2	355.8	358.7	355.6	359.4	347.1
42,5°	328.0	352.6	360.8	363.9	368.3	358.2	356.2	364.4	370.1	370.9	367.6	359.1	344.9
45,0°	334.6	357.9	364.8	372.3	370.2	361.6	366.2	373.8	385.7	385.3	368.9	360.6	349.9
47,5°	335.6	361.2	371.9	375.5	366.2	374.6	379.7	390.8	395.5	392.9	373.7	358.5	330.6
50,0°	333.2	358.6	375.4	375.2	380.7	383.0	391.4	407.7	423.6	398.5	367.7	329.8	282.7
52,5°	330.3	358.8	373.2	382.1	382.9	396.7	409.7	434.6	441.4	401.3	350.0	291.1	233.7
55,0°	334.1	363.5	378.1	386.3	398.8	423.8	441.5	441.1	420.3	385.7	309.2	234.7	184.4
57,5°	334.5	363.0	386.9	405.8	420.8	451.3	460.8	432.9	394.6	333.1	244.9	182.0	145.6
60,0°	343.4	386.8	411.2	430.9	463.3	495.1	456.9	407.8	360.3	277.0	182.7	141.5	133.5
62,5°	355.2	409.6	444.0	467.2	508.8	502.5	436.9	374.5	310.3	220.8	158.1	140.1	119.6
65,0°	363.9	427.8	470.2	507.6	526.4	480.2	405.9	335.1	261.4	202.9	157.6	116.6	75.7
67,5°	365.9	439.7	484.4	530.1	504.6	446.2	366.6	302.8	262.8	201.3	127.5	74.5	38.3
70,0°	361.8	427.3	480.7	494.0	452.1	390.2	353.2	342.1	271.3	160.9	82.6	40.8	21.3
72,5°	348.5	390.9	432.9	414.9	389.5	361.2	397.1	367.5	221.1	100.7	40.3	20.0	14.8
75,0°	281.9	295.0	323.9	333.1	324.9	367.7	367.8	233.4	109.1	39.6	15.4	12.6	11.4
77,5°	143.0	161.3	198.8	233.5	244.3	250.6	175.4	81.5	27.2	12.1	10.0	8.7	7.3
80,0°	40.2	63.0	91.1	97.3	95.2	86.7	27.8	12.7	6.5	6.7	7.5	5.6	4.2
82,5°	8.8	13.8	20.6	21.5	16.3	17.5	5.0	3.3	2.6	3.3	3.9	2.7	2.0
85,0°	1.2	1.3	1.5	1.6	1.4	1.7	1.3	1.2	1.1	0.9	1.1	0.8	0.7
87,5°	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	272.1	269.9	267.0	268.1	268.5	269.0	281.4	284.1	286.0	285.0	286.1	285.9	287.0
5,0°	269.3	272.2	271.3	271.9	270.8	271.9	283.4	282.6	282.5	285.9	285.5	283.5	281.1
7,5°	280.9	281.1	280.2	277.5	274.1	274.1	286.0	287.6	287.0	288.0	286.8	283.0	277.5
10,0°	287.1	285.1	283.0	280.7	279.3	280.8	287.8	290.8	286.8	282.7	279.5	273.9	268.3
12,5°	285.5	284.2	286.0	288.9	286.6	281.0	295.5	295.8	296.0	286.2	277.7	269.6	261.9
15,0°	292.0	290.2	289.8	292.0	297.5	298.6	293.5	294.0	291.5	286.7	277.3	264.8	251.5
17,5°	294.8	294.5	298.3	293.0	297.4	303.5	292.3	293.3	293.9	281.3	267.6	258.9	240.9
20,0°	299.0	299.5	304.2	296.9	296.7	296.7	294.8	297.3	288.7	278.8	264.7	247.9	234.6
22,5°	307.0	303.9	307.2	305.2	303.5	301.1	292.3	292.7	289.8	272.7	253.1	235.2	224.2
25,0°	308.5	307.0	306.5	307.6	304.1	305.3	288.3	287.7	284.5	273.6	248.9	229.8	214.2
27,5°	309.7	310.9	309.1	310.5	312.1	314.7	284.8	292.0	284.6	269.9	246.9	218.6	204.8
30,0°	318.8	313.0	316.5	319.3	321.1	315.6	288.4	288.0	277.1	262.6	236.5	216.2	195.1
32,5°	328.3	327.3	324.1	328.0	321.7	321.1	292.1	283.3	275.4	254.8	232.4	204.0	187.3
35,0°	333.0	330.3	327.3	330.3	321.0	320.8	293.4	280.5	274.9	250.9	222.6	198.5	180.2
37,5°	347.6	338.1	337.0	331.1	320.5	323.3	300.7	280.1	268.4	245.7	215.7	189.0	173.6
40,0°	336.7	326.6	325.9	326.6	319.5	315.5	299.6	275.7	266.2	239.6	208.1	184.4	173.4
42,5°	338.1	330.2	318.5	318.1	304.4	302.6	299.3	268.9	256.4	234.2	201.3	180.8	167.8
45,0°	331.0	306.8	290.4	268.8	256.0	259.8	300.8	268.3	248.2	226.4	193.0	177.1	163.8
47,5°	292.1	250.6	224.1	205.0	194.0	197.9	301.3	257.8	239.6	216.0	186.1	176.6	150.4
50,0°	230.3	192.7	175.9	164.2	151.9	149.7	291.8	255.7	228.4	209.2	179.8	170.6	134.0
52,5°	178.9	156.0	144.3	133.1	130.3	129.2	290.2	246.4	216.9	199.0	174.2	152.8	114.9
55,0°	145.4	130.5	117.0	116.4	114.2	113.5	290.0	243.5	208.9	184.8	172.7	133.8	95.4
57,5°	121.3	117.8	115.4	113.0	105.4	105.7	290.5	241.2	201.0	179.3	161.5	119.5	77.5
60,0°	120.8	110.0	93.0	83.4	79.0	73.2	288.7	237.1	193.6	170.7	151.6	103.2	63.9
62,5°	93.2	69.2	54.5	45.9	40.4	38.1	287.6	230.5	184.8	158.7	138.3	87.8	57.4
65,0°	54.2	33.9	28.7	26.2	24.3	23.1	285.3	219.6	173.6	147.8	120.0	76.2	53.1
67,5°	26.5	21.4	19.9	18.4	17.4	16.9	275.2	206.3	159.8	134.0	99.6	61.1	44.4
70,0°	17.3	16.2	15.1	13.9	13.6	13.6	271.2	190.7	143.4	115.8	76.3	41.8	37.8
72,5°	13.4	12.4	11.4	10.8	10.3	10.1	262.2	181.5	124.0	94.7	40.9	29.8	31.2
75,0°	9.9	9.0	7.8	7.7	7.0	7.0	234.3	162.3	97.6	56.0	20.7	21.7	24.4
77,5°	6.2	5.7	5.2	5.0	4.7	4.7	137.1	75.6	26.2	11.1	9.8	13.4	15.8
80,0°	3.7	3.3	3.1	3.0	2.9	2.6	42.3	12.7	5.3	5.7	5.5	8.1	8.7
82,5°	1.7	1.8	1.5	1.5	1.5	1.4	7.6	3.1	2.7	2.5	2.5	3.6	4.0
85,0°	0.7	0.7	0.6	0.6	0.5	0.6	1.3	1.2	1.1	1.1	1.0	1.1	1.0
87,5°	0.2	0.2	0.1	0.1	0.1	0.1	0.3	0.3	0.2	0.3	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	0.4	0.4
2,5°	286.8	285.3	284.3	284.7	284.2	283.3	284.6	283.3	283.5	283.7	284.6	3.3	3.8
5,0°	278.6	276.1	273.1	270.4	269.6	267.2	264.9	267.7	269.2	270.0	268.4	6.5	10.3
7,5°	270.7	265.2	261.6	259.4	254.7	252.2	249.7	249.3	251.4	252.1	251.1	9.8	20.1
10,0°	262.4	258.2	251.3	247.1	241.7	240.5	235.9	232.2	229.7	232.0	232.6	12.8	32.9
12,5°	253.0	248.1	241.3	233.4	227.8	225.9	222.1	221.1	217.0	216.2	217.6	15.9	48.8
15,0°	243.5	238.9	227.1	220.2	215.6	207.2	202.8	202.4	199.4	197.5	199.3	18.9	67.7
17,5°	230.7	224.5	216.6	207.3	197.9	192.6	186.1	186.7	184.9	178.1	179.1	21.6	89.3
20,0°	224.7	212.9	200.9	190.3	179.3	178.3	173.5	168.8	172.8	171.2	167.7	24.4	113.7
22,5°	214.9	197.6	181.9	175.8	167.5	170.4	169.4	167.1	165.9	164.7	164.5	27.1	140.8
25,0°	197.9	180.7	172.8	169.2	165.1	160.8	159.9	160.1	158.1	157.3	154.6	29.8	170.6
27,5°	187.3	175.1	165.8	162.0	159.3	153.5	151.8	145.8	145.0	142.8	140.4	32.4	203.0
30,0°	177.2	171.0	166.6	158.9	151.2	143.8	132.7	128.8	124.3	120.6	117.3	35.0	238.0
32,5°	172.7	165.1	158.2	150.4	138.9	130.3	117.7	112.6	105.8	101.8	100.1	37.5	275.5
35,0°	173.7	161.0	152.4	138.3	123.5	111.2	100.8	90.8	89.5	87.5	84.7	39.9	315.4
37,5°	166.8	154.7	137.1	122.9	105.2	92.7	86.3	81.1	76.6	73.0	69.0	42.2	357.6
40,0°	159.6	145.5	123.8	107.7	92.7	82.7	77.8	70.9	66.2	62.7	61.7	44.1	401.8
42,5°	150.3	129.1	106.2	93.0	85.0	75.6	70.1	65.3	59.6	54.9	52.8	46.0	447.8
45,0°	137.4	114.1	93.1	85.0	75.9	66.1	59.6	54.8	50.9	50.0	47.9	47.0	494.8
47,5°	124.3	96.6	84.4	75.5	64.4	54.9	48.4	46.6	45.4	44.6	44.2	46.6	541.4
50,0°	105.0	86.9	74.5	66.3	55.3	47.4	42.9	41.6	41.5	39.7	39.3	46.0	587.4
52,5°	89.2	76.5	63.7	53.4	45.8	41.0	37.8	37.7	35.4	34.8	35.4	45.4	632.9
55,0°	75.3	68.1	53.2	44.9	38.3	35.9	34.0	34.1	32.0	31.4	29.8	44.7	677.6
57,5°	64.5	56.8	45.7	39.7	34.2	32.8	30.9	30.2	29.1	28.8	27.4	44.0	721.6
60,0°	59.0	50.3	41.2	33.9	28.9	28.5	27.6	26.2	25.5	24.9	25.3	43.4	765.0
62,5°	53.6	44.6	34.6	28.4	25.6	23.6	22.6	20.3	19.8	18.9	18.3	42.0	807.0
65,0°	47.4	37.5	28.0	23.1	19.9	17.9	17.8	16.5	16.2	16.0	16.2	40.3	847.3
67,5°	39.3	28.4	21.3	17.9	16.3	15.1	14.9	14.3	14.0	13.4	12.8	38.3	885.6
70,0°	31.7	19.8	16.1	15.1	13.5	11.7	11.5	11.5	11.1	11.0	10.7	35.8	921.3
72,5°	24.4	15.2	12.7	11.7	10.5	9.3	8.6	8.1	7.7	7.5	7.3	32.3	953.6
75,0°	17.7	11.9	10.0	8.9	7.9	6.4	5.3	5.0	5.2	5.0	4.8	25.5	979.1
77,5°	11.6	7.9	6.4	5.8	4.8	3.7	3.2	3.1	2.9	2.5	2.7	14.3	993.4
80,0°	6.9	4.8	3.4	2.9	2.3	1.7	1.3	1.2	0.9	1.0	1.1	5.1	998.5
82,5°	3.1	2.0	1.3	1.1	0.9	0.4	0.4	0.4	0.4	0.4	0.3	1.3	999.7
85,0°	0.8	0.7	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	999.9
87,5°	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11290	87.3	90.3	88.8
95	239	252	10740	82.1	84.9	83.5
90	224	249	10176	76.9	79.4	78.2
85	209	247	9599	71.7	74.1	72.9
80	195	244	9041	66.8	69.1	67.9
75	181	242	8470	62.1	64.1	63.1
70	167	239	7893	57.3	59.2	58.2
65	154	236	7348	53.0	54.7	53.8
60	141	232	6791	48.6	50.2	49.4
55	128	229	6226	44.3	45.7	45.0
50	115	225	5646	40.0	41.3	40.6
45	103	221	5101	36.1	37.2	36.7
40	90	216	4500	31.8	32.7	32.2
35	78	211	3937	27.9	28.7	28.3
30	66	205	3364	24.0	24.7	24.4
25	55	198	2832	20.4	21.0	20.7
20	43	189	2244	16.5	17.0	16.8
15	32	178	1697	13.0	13.3	13.2
15	31	177	1647	12.7	13.0	12.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11670	88.3	91.4	89.8
95	239	252	11083	83.1	85.9	84.5
90	224	249	10485	77.8	80.4	79.1
85	210	247	9915	72.9	75.4	74.2
80	196	245	9330	68.1	70.3	69.2
75	182	242	8734	63.3	65.3	64.3
70	169	239	8175	58.8	60.7	59.8
65	155	236	7563	54.1	55.8	55.0
60	142	233	6985	49.7	51.2	50.4
55	129	229	6401	45.2	46.7	46.0
50	117	226	5848	41.3	42.5	41.9
45	104	221	5242	37.0	38.1	37.6
40	92	217	4674	32.9	33.9	33.4
35	80	212	4099	28.9	29.8	29.4
30	68	206	3514	25.0	25.8	25.4
25	56	199	2923	21.0	21.6	21.3
20	44	190	2325	17.1	17.6	17.4
15	33	179	1770	13.5	13.9	13.7
14	31	177	1669	12.9	13.2	13.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11490	87.8	90.8	89.3
95	239	252	10921	82.6	85.3	83.9
90	224	249	10339	77.3	79.9	78.6
85	210	247	9783	72.5	74.9	73.7
80	195	244	9171	67.3	69.6	68.4
75	182	242	8629	62.9	64.9	63.9
70	168	239	8039	58.1	60.0	59.0
65	155	236	7482	53.7	55.4	54.6
60	142	233	6914	49.3	50.8	50.0
55	129	229	6340	44.9	46.4	45.6
50	116	225	5750	40.6	41.9	41.2
45	103	221	5151	36.3	37.5	36.9
40	91	216	4589	32.3	33.4	32.8
35	79	211	4020	28.4	29.2	28.8
30	67	205	3441	24.5	25.2	24.8
25	55	198	2855	20.5	21.1	20.8
20	44	190	2311	16.9	17.4	17.2
15	32	178	1709	13.1	13.4	13.2
14	31	177	1659	12.8	13.1	13.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33R08JB EAN: 4058352682173	LP number 59158_56
--	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	11290.0	87.3
5.0	11670.0	88.3
15.0	11490.0	87.8