

Photometric test report

Family
Silica® 21



Order number: 51MX30TAT4S
EAN: 4058352685228

LP number
59412_84

serial
documentation
03.05.2023

Version Suspended luminaire, with homogeneous illumination, cover, opal, direct-/ indirect distribution, extremely wide distribution, $UGR \leq 25$, tunable white

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI


Setting factory setting

Rated values Net luminous flux = 4120 lm
Power consumption = 35.5 W
Luminous efficacy = 116.1 lm/W

siteco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 204 cd/klm

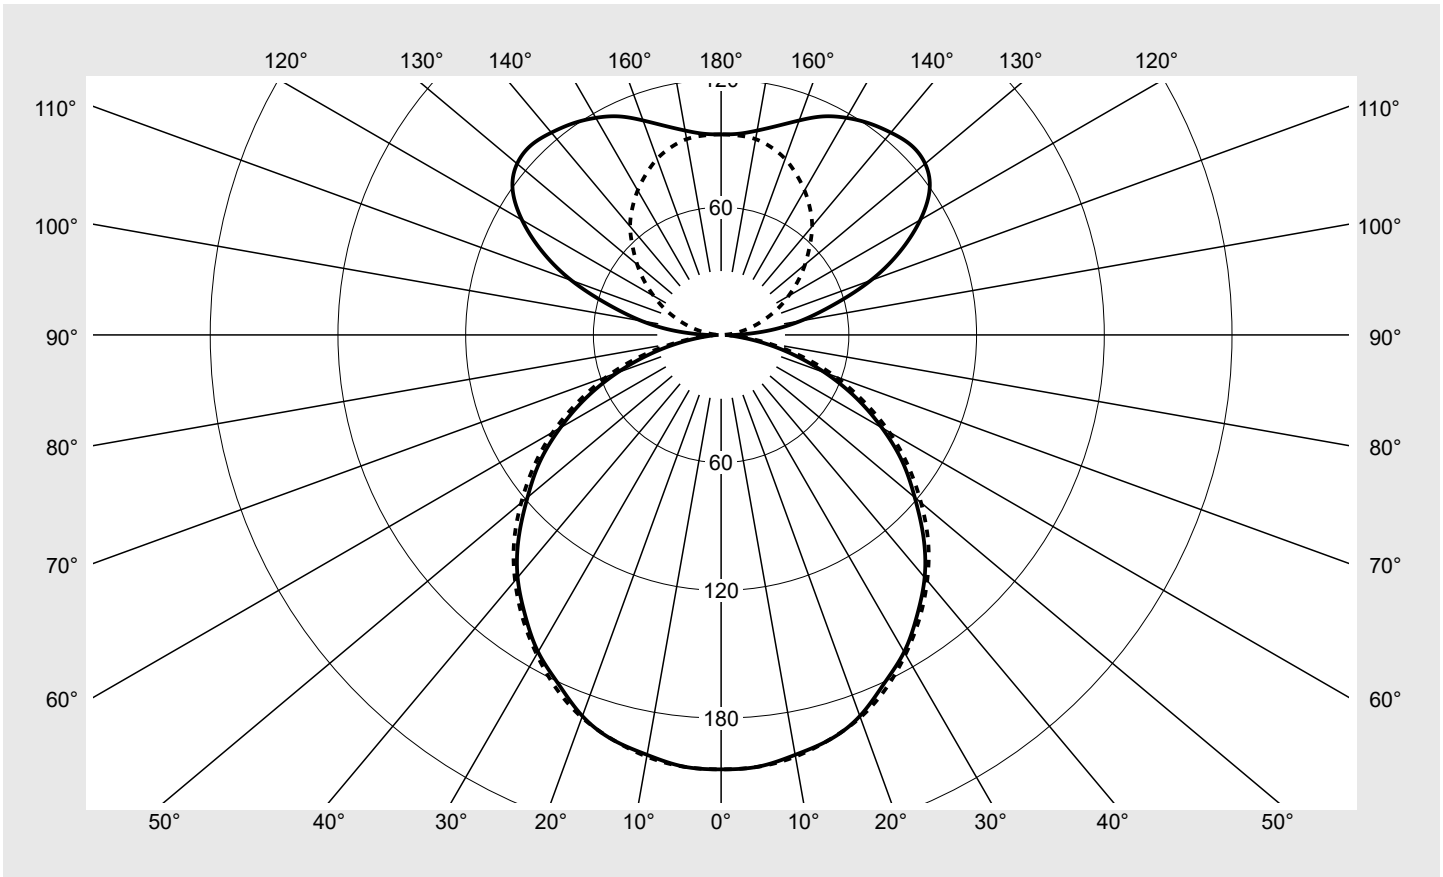

Classifications

DIN 5040 C 4 2
CIE N1=47 N2=79 N3=96
N4=58 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 57.8%
 ϕ_o 42.2%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX30TAT4S EAN: 4058352685228	LP number 59412_84
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	204.1	204.1	204.1	204.1	204.1	204.1	204.1	1.2	1.2
5°	203.5	203.8	203.3	203.3	203.4	203.8	203.6	9.7	10.9
10°	200.3	199.9	199.8	200.3	201.2	200.6	201.1	19.1	30.0
15°	196.9	196.3	195.1	196.0	196.7	197.0	196.8	27.9	57.9
20°	190.5	190.1	188.7	189.7	189.8	190.2	191.2	35.6	93.5
25°	180.9	181.1	180.3	181.3	182.3	182.2	183.2	42.1	135.5
30°	172.0	171.7	170.5	171.9	173.3	173.2	173.3	47.2	182.7
35°	160.6	160.7	159.7	160.3	160.9	161.7	162.5	50.6	233.3
40°	148.7	148.4	148.5	148.2	149.1	149.3	150.6	52.5	285.7
45°	134.5	134.5	134.8	134.8	135.4	135.8	137.6	52.4	338.1
50°	118.7	119.6	120.0	120.5	121.6	121.8	122.6	50.7	388.8
55°	104.0	104.1	104.8	105.3	106.3	106.3	107.2	47.3	436.2
60°	87.2	87.5	88.1	88.4	89.8	89.9	91.2	42.2	478.3
65°	70.0	70.7	71.5	72.5	73.2	73.9	73.9	35.9	514.2
70°	52.0	53.0	53.5	54.9	56.0	56.6	57.0	28.2	542.4
75°	34.3	35.1	35.7	36.9	38.2	39.1	39.4	19.6	562.0
80°	18.0	18.4	19.0	19.8	21.0	21.9	22.2	10.8	572.8
85°	5.8	6.0	6.3	6.8	7.4	8.1	8.3	3.8	576.6
90°	6.3	6.1	6.5	6.3	3.9	1.8	1.1	2.6	579.2
95°	21.6	22.1	23.8	22.9	15.1	7.9	4.1	9.5	588.7
100°	38.0	39.1	40.0	35.9	24.8	14.2	9.4	16.0	604.7
105°	54.7	56.0	55.9	49.2	34.1	21.4	15.7	22.2	626.9
110°	74.8	75.5	71.9	60.8	43.8	28.8	22.2	28.3	655.2
115°	92.7	92.3	86.1	71.6	53.1	36.3	29.5	33.2	688.4
120°	108.0	106.6	98.3	80.7	62.0	43.6	36.5	36.7	725.0
125°	119.6	116.6	106.6	89.4	69.8	50.5	44.0	38.5	763.5
130°	125.1	122.5	111.1	94.7	75.6	57.5	51.4	38.5	802.0
135°	126.1	123.5	112.8	98.1	79.9	63.9	58.8	36.9	838.9
140°	124.1	122.0	113.0	100.2	83.2	69.8	66.5	34.3	873.1
145°	121.3	120.0	112.4	100.8	86.1	75.2	72.7	31.0	904.1
150°	117.8	117.1	110.2	99.7	88.4	80.4	78.4	27.1	931.3
155°	113.3	112.8	106.2	98.4	90.0	85.0	83.4	22.8	954.1
160°	107.2	106.9	101.9	96.9	91.4	88.5	88.0	18.2	972.3
165°	101.6	101.0	98.5	95.2	92.8	91.2	91.2	13.6	985.9
170°	97.5	97.0	96.2	94.8	93.7	93.4	93.4	9.1	994.9
175°	94.9	94.8	94.2	94.0	94.0	94.0	94.0	4.5	999.4
180°	94.2	94.2	94.2	94.2	94.2	94.2	94.2	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX30TAT4S EAN: 4058352685228	LP number 59412_84
-----------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.5	19.6	19.3	20.4	21.5	18.7	19.7	19.5	20.6	21.6
	3H	19.9	20.8	20.8	21.7	22.8	20.2	21.2	21.1	22.0	23.1
	4H	20.4	21.3	21.3	22.1	23.3	20.8	21.7	21.7	22.6	23.7
	6H	20.6	21.4	21.5	22.3	23.5	21.1	21.9	22.0	22.8	24.0
	8H	20.6	21.4	21.5	22.3	23.5	21.1	21.9	22.0	22.8	24.0
	12H	20.6	21.3	21.5	22.2	23.4	21.2	21.9	22.1	22.8	24.0
4H	2H	19.1	20.0	20.0	20.9	22.0	19.2	20.1	20.1	20.9	22.1
	3H	20.7	21.4	21.6	22.3	23.5	20.9	21.6	21.8	22.5	23.7
	4H	21.3	21.9	22.2	22.8	24.0	21.6	22.3	22.5	23.2	24.4
	6H	21.6	22.1	22.5	23.1	24.3	22.1	22.6	23.0	23.6	24.8
	8H	21.7	22.2	22.6	23.1	24.3	22.2	22.7	23.1	23.6	24.9
	12H	21.6	22.1	22.6	23.0	24.3	22.2	22.7	23.2	23.6	24.9
8H	4H	21.4	22.0	22.4	22.9	24.1	21.7	22.2	22.7	23.2	24.4
	6H	21.9	22.3	22.9	23.3	24.5	22.3	22.7	23.3	23.7	24.9
	8H	22.0	22.4	23.0	23.4	24.6	22.5	22.9	23.5	23.9	25.1
	12H	22.0	22.3	23.0	23.3	24.6	22.6	22.9	23.6	23.9	25.2
12H	4H	21.4	21.8	22.4	22.8	24.1	21.7	22.1	22.6	23.1	24.3
	6H	21.9	22.3	22.9	23.2	24.5	22.3	22.6	23.3	23.6	24.9
	8H	22.0	22.3	23.0	23.3	24.6	22.5	22.8	23.5	23.8	25.1

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1200 B = 50
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13056.9	13064.8	13089.5	13091.1	13149.4	13184.0	13358.8	
50°		12684.2	12780.7	12817.0	12871.3	12990.5	13013.1	13094.5	
55°		12454.4	12468.3	12543.2	12605.7	12721.9	12722.9	12839.1	
60°		11975.5	12023.3	12093.0	12140.8	12334.0	12350.5	12522.3	
65°		11373.7	11487.6	11620.0	11774.2	11887.0	12006.4	12005.7	
70°		10439.1	10635.5	10743.7	11017.5	11233.4	11371.9	11444.2	
75°		9099.0	9314.4	9464.8	9792.2	10122.5	10385.5	10454.7	
80°		7119.8	7256.2	7506.2	7831.2	8302.6	8656.9	8762.5	
85°		4582.2	4744.5	5001.3	5371.6	5850.7	6349.4	6571.6	

Photometric test report

Family Silica® 21	Order number: 51MX30TAT4S EAN: 4058352685228	LP number 59412_84
------------------------------------	---	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

