


Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, wide distribution (ST1.5a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 2840 lm Power consumption = 19.1 W Luminous efficacy = 148.7 lm/W	serial documentation 09.08.2023



Luminous intensity in cd/klm C180-0 C215-35 C217,5-37,5 C270-90 **Imax: 1158 cd/klm**

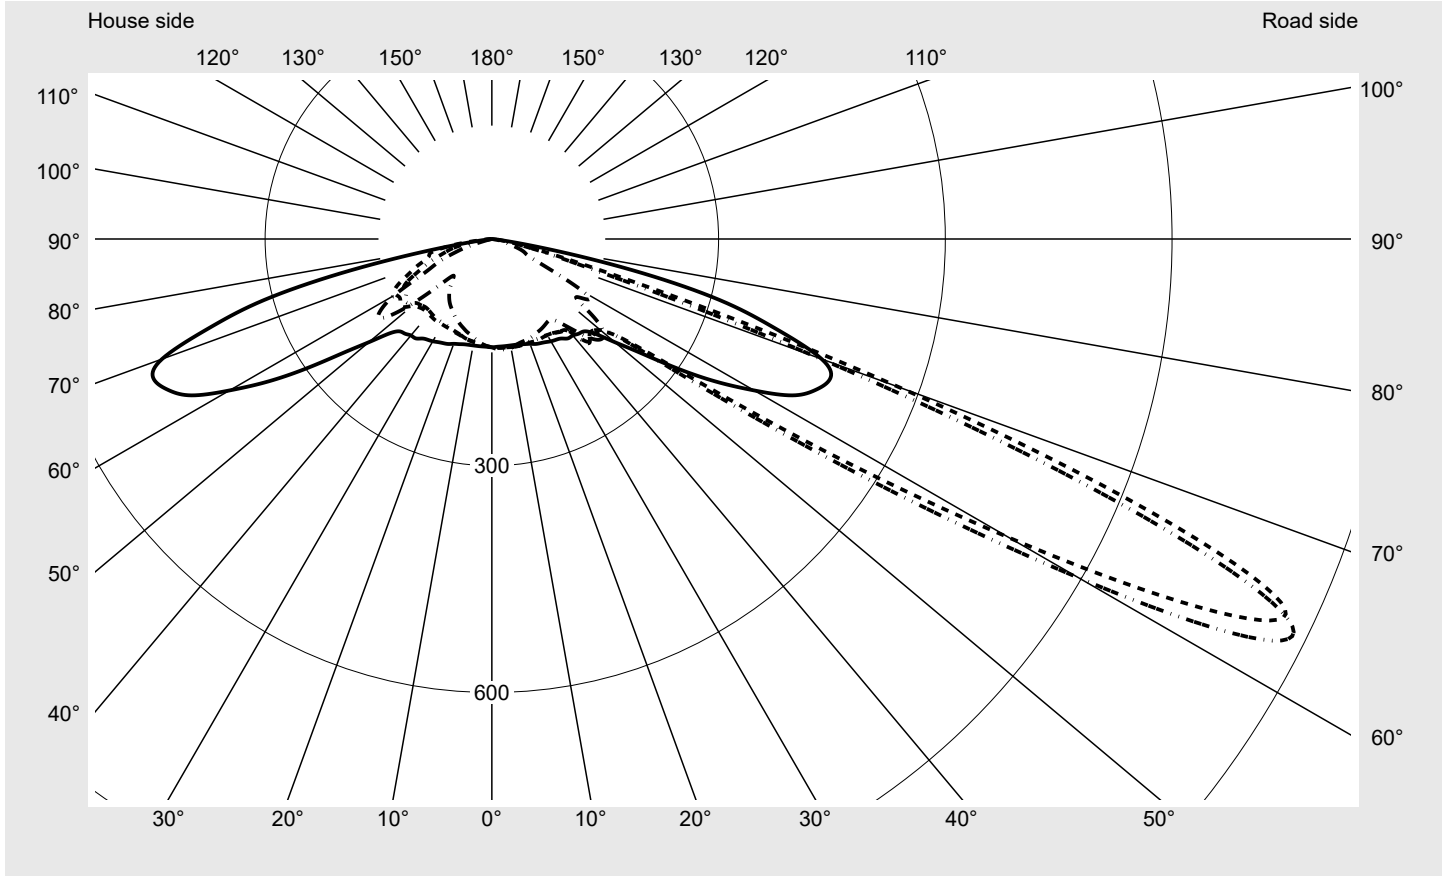

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	798.1
Imax 80°	214.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
---	--	-------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62.5°** **KMK 60°** **KMK 57.5°** **siteco**



Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
--	--	--------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.8	142.8	142.8	142.9	143.1	143.1	143.1	143.2	143.3	143.4	143.5	143.6	143.7	143.8	143.9
5,0°	142.7	142.9	143.0	143.1	143.3	143.5	143.6	143.7	143.9	143.9	144.0	144.1	144.2	144.3	144.4
7,5°	142.8	143.0	143.2	143.4	143.5	143.7	143.9	143.9	144.1	144.1	144.2	144.3	144.3	144.4	144.5
10,0°	143.0	143.3	143.5	143.6	143.9	144.0	144.0	144.1	144.2	144.3	144.4	144.5	144.7	144.8	145.1
12,5°	143.4	143.6	143.9	144.1	144.3	144.4	144.4	144.4	144.5	144.7	144.9	145.1	145.3	145.5	145.6
15,0°	144.2	144.5	144.8	144.9	145.1	145.1	145.1	145.2	145.4	145.6	145.7	146.0	146.0	146.1	146.1
17,5°	145.8	146.0	146.1	146.2	146.1	146.1	146.3	146.6	146.9	147.3	147.5	147.4	147.2	146.6	146.1
20,0°	147.6	147.9	147.9	147.8	147.6	147.5	148.0	148.5	149.0	149.4	149.3	149.1	148.4	147.2	145.9
22,5°	150.4	150.6	150.6	150.3	149.8	149.8	150.4	151.2	151.9	152.3	152.2	151.2	150.0	148.4	146.5
25,0°	152.1	152.6	152.7	152.4	151.8	151.8	152.5	153.5	154.3	154.7	154.1	152.8	151.0	149.1	147.2
27,5°	153.8	154.4	154.7	154.3	153.6	153.6	154.1	154.9	155.5	155.5	154.3	152.3	150.0	148.0	146.5
30,0°	156.3	157.0	157.4	156.8	155.7	155.5	155.7	156.0	156.0	155.2	153.4	151.2	149.2	147.9	147.1
32,5°	158.1	158.9	159.8	158.7	157.2	156.8	156.8	156.5	155.9	154.8	153.4	151.9	150.7	149.5	148.5
35,0°	160.7	161.8	162.6	162.2	160.9	160.1	159.4	158.7	158.1	157.0	155.7	154.5	153.2	152.0	151.0
37,5°	165.7	166.1	166.2	165.4	165.0	164.2	162.8	161.5	160.7	160.4	159.8	158.2	156.6	154.8	153.7
40,0°	166.6	168.0	168.8	167.7	167.3	166.7	165.5	164.1	163.2	162.3	161.4	160.3	159.5	159.1	159.4
42,5°	170.0	170.9	171.8	172.1	171.9	171.0	169.4	168.2	166.9	166.4	165.8	167.1	170.6	177.0	183.4
45,0°	172.8	175.4	177.0	177.0	176.3	174.8	173.5	173.2	174.0	177.6	181.1	184.0	186.0	187.8	186.7
47,5°	185.7	187.3	190.2	192.0	190.4	188.4	189.3	191.3	193.7	195.3	194.9	193.8	191.8	189.0	185.1
50,0°	212.4	217.2	220.2	221.6	222.5	223.0	223.3	222.1	219.2	214.6	208.3	202.9	198.2	194.4	191.1
52,5°	247.1	249.7	251.8	252.7	252.4	251.7	249.9	246.8	241.4	234.4	227.7	220.9	214.7	212.4	214.2
55,0°	297.3	297.7	296.4	295.8	295.4	294.0	291.1	286.7	281.1	274.7	268.6	263.1	262.8	276.5	308.0
57,5°	350.8	343.8	339.4	337.4	336.8	335.2	333.3	332.0	332.2	335.9	345.9	367.3	403.6	458.5	522.3
60,0°	400.7	393.9	388.9	388.3	391.7	393.1	394.0	398.8	409.1	433.6	481.3	545.9	610.9	689.2	790.7
62,5°	448.1	436.0	433.8	435.8	444.3	452.1	463.5	487.0	523.4	578.3	647.3	725.1	813.3	924.2	1055.4
65,0°	472.5	462.3	461.7	467.0	482.8	501.3	531.4	575.9	629.5	700.3	778.1	870.7	989.9	1101.5	1157.9
67,5°	484.2	471.1	471.3	481.5	504.1	534.5	585.0	642.0	703.7	780.6	869.3	953.0	995.9	986.1	943.8
70,0°	464.4	449.7	450.7	467.4	493.7	530.1	578.7	634.7	700.5	767.2	798.1	784.8	735.5	664.7	573.7
72,5°	392.8	388.4	393.0	413.7	440.2	469.5	503.0	541.4	565.4	566.1	534.9	483.8	414.8	333.4	252.8
75,0°	312.1	307.6	313.3	327.7	348.5	372.0	389.6	388.5	368.3	332.7	294.3	244.7	190.7	137.0	105.3
77,5°	189.9	195.2	198.5	206.5	221.1	230.8	229.7	213.5	188.8	161.7	132.1	99.8	74.0	60.2	51.1
80,0°	70.3	62.4	59.0	57.6	57.7	62.9	73.3	71.0	58.9	47.0	36.3	30.1	27.5	25.5	23.4
82,5°	14.9	14.1	13.5	13.4	13.9	14.7	15.6	15.7	14.3	11.7	10.5	10.4	10.5	10.5	10.1
85,0°	4.1	4.1	4.0	4.1	4.1	4.1	4.2	4.2	4.1	4.1	4.1	4.0	4.0	3.9	3.8
87,5°	2.1	2.1	2.1	2.2	2.2	2.2	2.1	2.1	2.1	2.0	1.9	1.9	1.9	1.8	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	144.1	144.2	144.3	144.4	144.4	144.6	144.8	144.9	145.0	145.1	145.1	145.2	145.2	145.2	145.3
5,0°	144.5	144.7	144.8	144.9	144.9	145.1	145.2	145.4	145.6	145.6	145.7	145.8	145.9	146.0	146.1
7,5°	144.7	144.9	145.1	145.2	145.4	145.6	145.8	146.1	146.2	146.5	146.7	146.8	146.9	147.0	147.1
10,0°	145.2	145.5	145.7	145.9	146.1	146.2	146.3	146.5	146.6	146.7	146.7	146.7	146.6	146.6	146.5
12,5°	145.7	145.9	146.1	146.1	146.1	146.0	146.0	145.9	145.6	145.4	145.2	145.0	144.8	144.7	144.6
15,0°	146.1	145.9	145.6	145.1	144.7	144.3	144.0	143.8	143.5	143.3	143.0	142.7	142.5	142.4	142.3
17,5°	145.3	144.7	144.1	143.4	142.7	142.2	141.7	141.5	141.3	141.2	141.2	141.0	141.0	140.9	141.0
20,0°	144.5	143.3	142.3	141.7	141.2	140.9	140.5	140.5	140.3	140.4	140.3	140.3	140.3	140.4	140.3
22,5°	144.7	143.2	142.2	141.4	140.9	140.6	140.5	140.3	140.1	140.1	140.1	140.1	140.1	140.0	140.0
25,0°	145.3	143.8	142.6	141.9	141.4	141.1	140.9	140.7	140.4	140.1	139.9	139.6	139.2	139.0	138.7
27,5°	145.4	144.7	144.0	143.4	142.6	142.1	141.4	140.8	140.1	139.5	138.8	138.3	138.0	137.7	137.4
30,0°	146.6	146.3	146.1	145.6	144.4	143.1	141.8	140.7	139.7	138.9	138.3	137.6	137.1	136.7	136.2
32,5°	147.9	148.3	149.4	149.2	147.7	145.3	143.3	141.7	140.4	139.2	138.3	137.2	136.3	135.5	134.8
35,0°	150.4	150.2	150.8	151.6	149.9	147.1	144.6	142.5	140.6	139.0	137.8	136.6	135.8	134.9	134.1
37,5°	152.8	151.9	150.7	149.7	150.1	149.1	146.8	143.8	141.6	139.8	138.4	136.9	135.7	134.7	134.1
40,0°	161.0	164.5	168.6	171.3	172.7	172.2	170.1	166.1	160.9	154.8	148.7	143.6	140.7	139.7	140.2
42,5°	186.8	187.3	186.7	184.0	179.0	173.8	170.0	166.2	161.1	157.4	154.7	152.9	152.7	153.8	155.1
45,0°	182.8	178.9	174.1	169.8	166.6	164.1	163.1	163.3	163.6	164.9	166.2	167.6	169.7	172.0	174.0
47,5°	180.0	176.2	173.4	171.2	170.1	170.8	172.0	175.4	179.8	184.3	187.4	189.6	191.8	193.5	194.1
50,0°	187.5	185.2	183.9	184.0	187.3	192.4	199.0	205.3	210.0	214.2	216.3	214.8	212.0	209.8	207.2
52,5°	218.8	227.2	239.6	251.9	261.3	267.0	266.2	261.5	253.9	247.3	244.9	235.9	226.3	216.2	206.7
55,0°	351.2	391.6	419.1	432.1	429.9	408.9	375.3	339.6	313.6	292.8	274.7	252.0	228.2	207.5	190.9
57,5°	595.6	660.1	690.6	669.0	605.5	526.5	457.2	401.8	358.6	321.1	285.3	254.5	229.7	207.0	188.8
60,0°	897.1	959.8	952.8	864.4	739.0	609.8	497.0	406.8	334.3	285.2	249.3	216.0	196.1	183.8	174.5
62,5°	1147.2	1145.6	1075.2	953.7	783.7	604.3	437.1	316.8	238.8	187.0	157.2	140.6	129.3	119.9	112.9
65,0°	1140.2	1062.0	943.2	776.3	584.1	406.2	271.7	178.5	129.0	102.9	90.7	82.1	76.9	71.7	67.6
67,5°	852.9	715.2	554.7	398.3	252.6	153.7	106.1	81.9	70.1	64.3	61.5	59.7	59.3	58.8	56.0
70,0°	460.6	337.8	231.0	155.4	103.2	75.1	62.5	55.5	51.5	49.6	48.1	46.9	45.9	46.1	46.2
72,5°	182.3	140.9	106.6	78.2	58.1	47.0	41.2	38.6	37.0	36.0	35.6	34.2	33.6	32.9	27.9
75,0°	85.2	71.5	56.9	44.0	35.4	29.8	27.3	26.0	25.1	24.5	24.2	23.4	22.1	19.8	19.4
77,5°	44.0	38.2	31.8	25.6	21.3	19.0	18.3	17.5	16.9	16.5	16.3	15.8	15.2	14.8	14.4
80,0°	21.2	19.3	16.6	14.1	12.4	11.8	11.6	11.4	11.0	10.9	10.7	10.4	10.1	9.9	9.7
82,5°	9.4	8.9	8.3	7.5	6.9	6.6	6.7	6.7	6.6	6.4	6.3	6.2	6.0	5.8	5.8
85,0°	3.6	3.6	3.5	3.3	3.2	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.8	2.6	2.6
87,5°	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	145.3	145.4	145.4	145.5	145.6	145.6	145.6	142.6	142.5	142.3	142.2	142.2	142.1	142.1	142.1
5,0°	146.1	146.2	146.3	146.4	146.4	146.5	146.5	142.6	142.3	142.0	141.8	141.7	141.5	141.4	141.3
7,5°	147.2	147.2	147.4	147.4	147.4	147.4	147.4	142.5	142.2	141.9	141.5	141.3	141.0	140.9	140.6
10,0°	146.5	146.6	146.6	146.5	146.5	146.5	146.5	142.6	142.2	141.8	141.4	141.0	140.9	140.5	140.2
12,5°	144.4	144.5	144.4	144.4	144.3	144.3	144.2	142.9	142.4	142.0	141.5	141.1	140.7	140.4	139.9
15,0°	142.2	142.2	142.3	142.3	142.3	142.3	142.2	143.8	143.3	142.8	142.3	141.9	141.5	141.2	140.7
17,5°	141.1	141.2	141.3	141.4	141.4	141.4	141.4	145.2	144.8	144.3	143.6	143.0	142.4	141.8	140.8
20,0°	140.4	140.5	140.5	140.7	140.8	140.8	140.8	147.3	146.5	145.6	144.8	143.9	143.0	141.8	140.5
22,5°	139.9	139.8	139.7	139.7	139.6	139.7	139.6	149.4	148.7	147.6	146.5	145.5	144.1	142.5	140.9
25,0°	138.4	138.1	138.0	137.9	137.9	137.9	137.9	151.2	150.2	149.3	148.4	147.4	145.6	143.9	142.0
27,5°	137.1	136.8	136.6	136.5	136.6	136.5	136.6	152.7	151.8	150.9	149.9	148.7	147.0	145.2	143.3
30,0°	135.8	135.5	135.2	135.0	134.9	134.9	134.9	155.2	153.9	152.7	151.4	149.7	147.9	146.1	144.4
32,5°	134.2	133.8	133.5	133.2	133.0	132.9	133.0	156.7	155.1	153.8	152.3	150.5	148.7	147.0	145.0
35,0°	133.5	133.0	132.6	132.3	132.1	131.9	131.7	159.5	158.1	156.8	154.7	152.5	150.7	148.8	146.6
37,5°	134.1	134.6	135.3	135.8	135.6	135.3	135.3	164.1	162.4	160.4	157.6	155.1	152.7	150.7	148.2
40,0°	141.5	143.4	145.4	147.7	148.3	148.1	148.2	165.1	164.0	162.6	160.2	157.7	155.5	153.2	150.2
42,5°	156.6	158.9	161.5	164.4	166.1	166.3	166.6	167.6	166.7	164.7	162.6	160.7	158.1	155.4	152.1
45,0°	175.6	177.6	179.9	182.7	184.9	185.8	186.2	171.1	169.4	167.5	165.8	163.4	161.1	158.2	154.7
47,5°	193.8	193.5	193.6	194.5	196.0	196.2	196.3	180.0	178.3	175.0	171.8	168.7	165.6	162.4	158.6
50,0°	204.0	200.6	199.2	198.4	196.3	193.5	192.8	212.1	205.3	200.3	195.6	190.4	185.6	180.4	173.7
52,5°	197.6	189.8	183.6	178.6	174.9	172.1	170.8	243.5	242.7	237.2	226.1	212.7	202.8	194.8	186.6
55,0°	177.1	164.9	154.2	146.9	142.0	137.7	136.4	306.3	307.5	309.4	296.7	269.6	235.8	209.4	194.7
57,5°	176.5	166.2	159.0	155.0	152.9	149.8	148.6	362.1	379.4	390.6	382.5	352.8	300.9	249.5	216.4
60,0°	167.1	158.5	152.4	147.8	145.2	141.9	140.3	421.2	444.2	465.8	465.4	432.2	370.1	303.7	255.1
62,5°	107.3	100.2	95.5	91.5	89.0	86.4	85.0	467.6	500.7	531.6	543.3	518.0	456.8	379.0	305.5
65,0°	64.9	61.8	59.7	58.1	57.6	55.5	54.5	498.8	534.5	570.4	594.8	578.8	528.7	445.1	355.5
67,5°	53.4	51.7	50.7	49.7	48.7	47.1	47.2	511.9	544.5	577.9	603.6	591.4	551.6	488.4	410.8
70,0°	43.2	41.3	40.3	39.7	39.7	39.7	39.6	483.2	514.9	547.5	567.8	560.5	538.9	500.0	449.0
72,5°	25.2	23.6	23.4	23.5	30.6	32.6	28.2	418.6	437.7	467.2	483.2	493.6	490.6	479.8	460.1
75,0°	19.3	18.6	18.2	18.1	30.1	24.0	20.9	317.6	333.1	354.8	376.5	394.0	408.6	419.8	423.9
77,5°	13.9	13.6	13.2	13.1	14.9	14.6	14.3	205.9	210.9	224.6	243.3	263.8	286.8	308.4	326.0
80,0°	9.3	8.9	8.7	8.6	8.8	8.9	9.2	74.8	83.6	95.3	110.3	128.9	151.2	174.9	196.6
82,5°	5.5	5.2	5.0	4.9	4.9	5.3	5.5	17.3	18.5	21.3	25.4	31.0	39.7	52.1	68.0
85,0°	2.4	2.4	2.4	2.3	2.4	2.3	2.3	3.8	4.0	4.0	3.9	3.9	3.8	3.8	3.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.8	0.8	2.1	2.1	2.1	2.0	2.0	2.0	2.0	1.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.0	141.9	141.9	141.9	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.8	141.8	141.7
5,0°	141.2	140.9	140.9	140.9	140.8	140.7	140.6	140.4	140.3	140.2	140.1	140.1	140.0	139.8	139.9
7,5°	140.4	140.1	140.0	139.7	139.6	139.3	139.2	139.0	138.8	138.7	138.5	138.4	138.3	138.1	137.9
10,0°	139.9	139.6	139.2	139.0	138.8	138.4	138.1	137.7	137.2	136.9	136.4	136.0	135.7	135.3	134.9
12,5°	139.6	139.3	139.0	138.7	138.1	137.6	137.1	136.4	135.9	135.4	134.9	134.4	133.8	133.2	132.8
15,0°	140.2	139.6	138.8	138.0	137.3	136.6	135.9	135.1	134.3	133.6	132.8	131.9	131.1	130.4	129.8
17,5°	139.7	138.5	137.5	136.4	135.4	134.6	133.9	133.2	132.3	131.4	130.6	129.8	129.0	128.3	127.5
20,0°	139.1	137.8	136.6	135.4	134.4	133.3	132.3	131.4	130.4	129.4	128.5	127.6	126.8	125.9	125.3
22,5°	139.3	137.8	136.4	135.2	133.8	132.4	131.1	129.8	128.5	127.4	126.3	125.4	124.4	123.6	123.0
25,0°	140.1	138.4	136.7	134.9	133.2	131.5	129.9	128.5	126.9	125.5	124.5	123.3	122.4	121.4	120.6
27,5°	141.3	139.2	137.1	134.9	132.8	131.0	129.1	127.2	125.6	124.0	122.8	121.6	120.3	119.1	118.2
30,0°	142.2	140.0	137.6	135.3	132.9	130.7	128.7	126.7	124.8	122.9	121.3	119.9	118.3	116.9	115.6
32,5°	142.9	140.5	138.3	135.8	133.2	130.8	128.5	126.2	123.9	121.9	119.9	118.2	116.5	114.8	113.1
35,0°	144.0	141.3	138.6	135.9	133.3	131.0	128.2	125.6	122.9	120.5	118.2	116.0	114.1	112.2	110.5
37,5°	145.2	142.2	139.2	136.3	133.5	130.3	127.4	124.7	121.8	118.7	116.0	113.6	111.4	109.5	107.9
40,0°	146.9	143.5	140.1	136.9	133.5	129.9	126.4	123.1	120.3	117.3	114.2	111.2	108.6	106.5	104.9
42,5°	148.3	144.3	140.5	137.2	133.5	129.6	125.7	122.1	118.7	115.6	112.2	109.2	106.0	103.3	101.0
45,0°	150.4	146.1	141.8	137.8	134.0	130.3	126.3	122.5	118.4	114.9	111.1	107.4	103.6	99.7	96.4
47,5°	154.1	149.6	145.6	141.5	137.5	132.9	128.8	124.5	120.0	115.9	112.0	107.6	103.4	99.2	94.9
50,0°	166.8	160.9	155.2	149.5	143.5	137.9	131.6	126.4	122.1	117.8	113.2	108.3	104.2	100.6	97.6
52,5°	179.8	174.5	170.1	164.1	156.2	147.8	139.1	130.8	123.7	117.4	111.7	105.9	101.2	98.0	96.6
55,0°	185.2	177.8	170.1	162.7	154.9	147.7	140.2	134.0	127.2	119.1	111.1	103.6	97.7	94.2	93.3
57,5°	199.9	189.5	178.3	167.1	155.5	144.5	134.5	125.1	116.9	109.6	103.4	97.8	92.4	89.1	88.8
60,0°	220.3	197.3	182.2	170.4	157.7	146.8	134.4	121.2	108.5	98.4	90.5	84.7	81.8	81.5	82.9
62,5°	252.5	213.6	190.4	175.7	159.1	144.8	128.9	112.2	98.3	87.7	81.0	76.8	75.3	76.6	78.9
65,0°	290.5	245.2	206.5	177.3	153.7	132.3	113.9	98.3	86.6	78.9	74.8	72.4	71.4	72.1	74.4
67,5°	339.6	279.5	227.5	177.0	142.6	117.7	98.8	85.5	76.4	71.1	68.2	66.4	65.4	65.9	67.6
70,0°	393.3	334.0	256.5	185.8	133.6	105.7	86.3	74.3	67.3	63.1	60.3	58.7	58.0	57.8	59.4
72,5°	430.2	379.5	299.1	206.5	133.5	92.5	71.9	61.6	56.0	52.6	50.3	48.5	47.7	47.8	49.6
75,0°	415.5	386.9	326.1	231.4	141.2	86.0	60.7	50.0	44.1	40.5	38.4	37.2	37.1	37.4	38.3
77,5°	334.1	328.0	299.2	241.7	154.5	82.0	48.4	36.8	31.1	28.1	26.7	25.5	25.2	25.7	26.4
80,0°	211.1	214.2	200.9	168.0	117.3	62.4	29.3	20.8	17.4	15.4	14.2	13.9	13.9	14.3	13.9
82,5°	78.3	80.0	78.5	71.8	58.2	35.0	15.2	8.8	7.4	6.4	5.7	5.3	5.4	5.7	5.6
85,0°	3.8	3.8	4.0	4.1	4.3	4.2	3.4	2.7	2.4	2.3	2.1	2.0	1.9	1.8	1.7
87,5°	1.9	1.8	1.8	1.6	1.6	1.5	1.5	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	0.2	0.2
2,5°	141.8	141.8	141.8	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.9	141.9	1.7	1.9
5,0°	139.8	139.7	139.8	139.7	139.7	139.6	139.6	139.7	139.6	139.6	139.7	139.7	139.6	3.4	5.3
7,5°	137.7	137.5	137.4	137.2	137.1	137.0	136.8	136.7	136.7	136.6	136.6	136.6	136.6	5.1	10.4
10,0°	134.7	134.5	134.1	133.9	133.6	133.5	133.3	133.2	133.2	133.2	133.1	133.1	133.2	6.7	17.1
12,5°	132.3	131.9	131.5	131.1	130.8	130.5	130.2	130.0	129.9	129.8	129.8	129.7	129.8	8.3	25.5
15,0°	129.2	128.7	128.1	127.7	127.4	127.2	127.0	126.9	127.0	127.0	127.1	127.2	127.2	9.9	35.3
17,5°	126.8	126.2	125.5	125.1	124.6	124.3	124.2	124.0	124.0	123.9	124.0	123.9	123.9	11.4	46.7
20,0°	124.7	124.2	123.5	122.9	122.3	121.8	121.4	121.1	120.9	120.8	120.8	120.8	120.8	12.9	59.6
22,5°	122.4	121.8	121.2	120.6	119.8	119.1	118.5	118.1	117.8	117.6	117.6	117.5	117.4	14.4	74.0
25,0°	119.7	119.1	118.3	117.7	116.9	116.1	115.6	115.1	114.5	114.3	114.2	114.1	114.2	15.9	89.9
27,5°	117.0	116.1	115.3	114.7	113.9	113.2	112.5	111.8	111.1	110.6	110.3	110.1	110.1	17.3	107.2
30,0°	114.3	113.3	112.4	111.5	110.7	110.0	109.2	108.5	107.8	107.0	106.6	106.5	106.4	18.6	125.8
32,5°	111.8	110.6	109.5	108.5	107.6	106.7	105.9	105.2	104.4	103.6	103.1	102.7	102.7	20.0	145.8
35,0°	109.1	107.8	106.6	105.6	104.4	103.3	102.3	101.5	100.6	99.6	98.8	98.2	98.1	21.4	167.2
37,5°	106.5	105.1	103.7	102.4	101.0	99.3	98.0	96.9	95.9	94.8	93.8	93.0	92.8	22.8	190.0
40,0°	103.2	101.4	99.7	98.0	96.0	93.8	92.0	90.9	89.8	88.6	87.6	86.9	86.8	24.7	214.6
42,5°	98.6	96.1	93.4	90.9	88.6	86.1	84.7	83.9	82.1	80.4	79.4	78.7	78.7	26.6	241.3
45,0°	92.8	89.4	86.2	83.0	80.4	77.9	76.4	75.7	74.4	73.1	72.5	71.9	71.7	28.4	269.7
47,5°	90.8	87.5	84.4	82.0	80.0	78.3	77.1	77.0	76.7	76.5	76.6	76.5	76.4	31.1	300.7
50,0°	95.5	94.6	94.8	96.3	98.8	101.6	104.9	109.2	112.6	115.5	117.9	119.1	119.4	35.8	336.5
52,5°	97.6	100.0	104.4	110.6	118.5	126.5	134.5	142.9	149.7	155.3	159.0	161.2	161.7	41.6	378.2
55,0°	96.1	101.2	108.2	117.3	128.1	139.3	149.5	159.6	168.4	174.7	179.0	181.7	182.0	50.3	428.5
57,5°	92.0	97.7	105.7	115.2	125.6	137.4	147.7	156.0	164.1	168.5	171.3	173.0	173.5	62.1	490.5
60,0°	86.4	92.0	99.3	107.9	116.7	125.7	134.1	140.1	144.4	147.1	148.2	148.8	148.9	73.7	564.2
62,5°	82.3	86.6	92.5	98.5	103.8	108.3	112.0	113.8	113.3	112.8	111.5	109.6	109.0	81.0	645.2
65,0°	77.0	80.1	84.5	88.9	92.5	94.7	96.5	96.0	94.6	92.1	89.7	87.9	86.8	81.9	727.1
67,5°	71.0	74.2	78.2	81.7	83.6	84.2	84.2	82.0	79.9	77.4	74.4	72.9	71.2	75.6	802.6
70,0°	62.4	65.9	69.3	72.3	71.9	69.4	67.1	62.8	60.2	56.1	54.8	52.6	50.9	64.8	867.5
72,5°	51.7	55.1	56.3	57.8	55.6	52.7	49.5	43.5	40.9	37.7	40.4	36.4	33.9	51.4	918.8
75,0°	40.3	40.8	40.7	39.5	38.9	34.0	24.1	14.9	12.9	12.3	18.1	12.0	11.0	38.4	957.2
77,5°	26.4	26.6	26.8	23.3	15.7	8.2	7.0	6.6	6.4	5.6	5.3	4.7	4.7	25.3	982.6
80,0°	14.0	13.2	11.4	6.5	4.5	4.0	3.4	3.2	3.0	2.4	1.9	1.7	1.8	12.1	994.7
82,5°	5.4	4.7	3.5	2.7	2.4	2.1	1.9	1.7	1.5	1.2	1.1	1.1	1.0	4.2	998.8
85,0°	1.5	1.5	1.4	1.2	1.2	1.1	1.0	0.9	0.9	0.7	0.7	0.7	0.6	0.8	999.6
87,5°	1.0	1.0	0.9	0.8	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
---	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	2840	19.1	19.7	19.4
95	241	252	2695	18.0	18.6	18.3
90	229	250	2560	17.0	17.6	17.3
85	216	248	2415	15.9	16.4	16.2
80	203	246	2270	14.9	15.4	15.2
75	190	243	2124	13.9	14.3	14.1
70	178	241	1990	12.9	13.3	13.1
65	165	238	1845	11.9	12.3	12.1
60	152	235	1700	11.0	11.3	11.2
55	140	232	1565	10.1	10.4	10.2
50	127	229	1420	9.2	9.5	9.4
45	114	225	1275	8.3	8.5	8.4
40	102	221	1140	7.4	7.6	7.5
35	89	216	995	6.6	6.7	6.6
30	76	210	850	5.7	5.9	5.8
25	63	203	704	4.9	5.0	5.0
20	51	195	570	4.0	4.2	4.1
15	38	184	425	3.1	3.2	3.2
10	25	169	280	2.0	2.1	2.0

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	2840	19.0	19.6	19.3
95	241	252	2695	17.9	18.5	18.2
90	229	250	2560	16.9	17.5	17.2
85	216	248	2415	15.9	16.4	16.2
80	203	246	2270	14.9	15.3	15.1
75	191	244	2136	13.9	14.3	14.1
70	178	241	1990	12.9	13.3	13.1
65	165	238	1845	12.0	12.3	12.2
60	152	235	1700	11.0	11.3	11.2
55	140	232	1565	10.1	10.4	10.2
50	127	229	1420	9.2	9.5	9.4
45	114	225	1275	8.3	8.5	8.4
40	102	221	1140	7.4	7.7	7.6
35	89	216	995	6.6	6.8	6.7
30	76	210	850	5.7	5.9	5.8
25	64	204	716	5.0	5.1	5.0
20	51	195	570	4.1	4.2	4.2
15	38	184	425	3.1	3.2	3.2
10	25	169	280	2.1	2.1	2.1

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
---	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	2840	19.1	19.6	19.4
95	241	252	2695	18.0	18.5	18.2
90	229	250	2560	17.0	17.5	17.2
85	216	248	2415	15.9	16.4	16.2
80	203	246	2270	14.8	15.3	15.0
75	191	244	2135	14.0	14.3	14.2
70	178	241	1990	12.9	13.3	13.1
65	165	238	1845	11.9	12.3	12.1
60	152	235	1699	11.0	11.3	11.2
55	140	232	1565	10.1	10.4	10.2
50	127	229	1420	9.2	9.5	9.4
45	114	225	1275	8.3	8.5	8.4
40	102	221	1140	7.5	7.6	7.6
35	89	216	995	6.5	6.7	6.6
30	76	210	850	5.7	5.9	5.8
25	64	204	716	4.9	5.1	5.0
20	51	195	570	4.1	4.2	4.2
15	38	184	425	3.0	3.1	3.0
10	25	169	280	2.0	2.1	2.0

Photometric test report

Family Streetlight 21 micro LED	Order number: 5XE1P31Y08CB EAN: 4058352923146	LP number 59337_559
---	--	--------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
25.0	2840.0	19.1
5.0	2840.0	19.0
15.0	2840.0	19.1