


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, wide distribution (ST0.5a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 5990 lm Power consumption = 39.8 W Luminous efficacy = 150.5 lm/W	serial documentation 09.08.2023

Luminous intensity in cd/klm C180-0 C205-25 C207,5-27,5 C270-90 **Imax: 661 cd/klm**

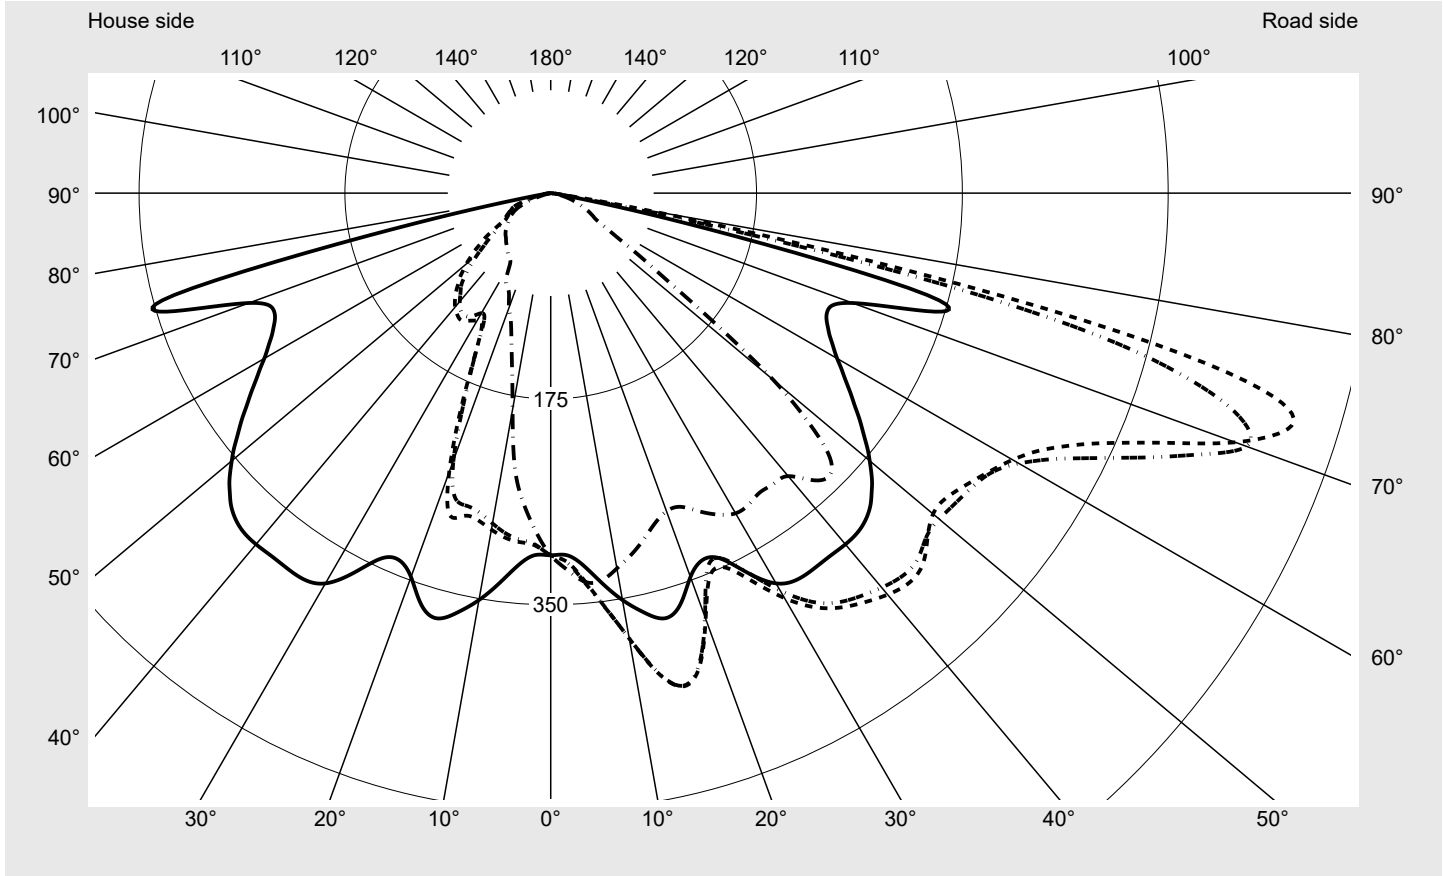

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	629.6
Imax 80°	99.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
--	--	--------------------------------

Envelope curve in cd/klm **KMK 73°** **KMK 72°** **KMK 71°** **KMK 70°** **siteco**

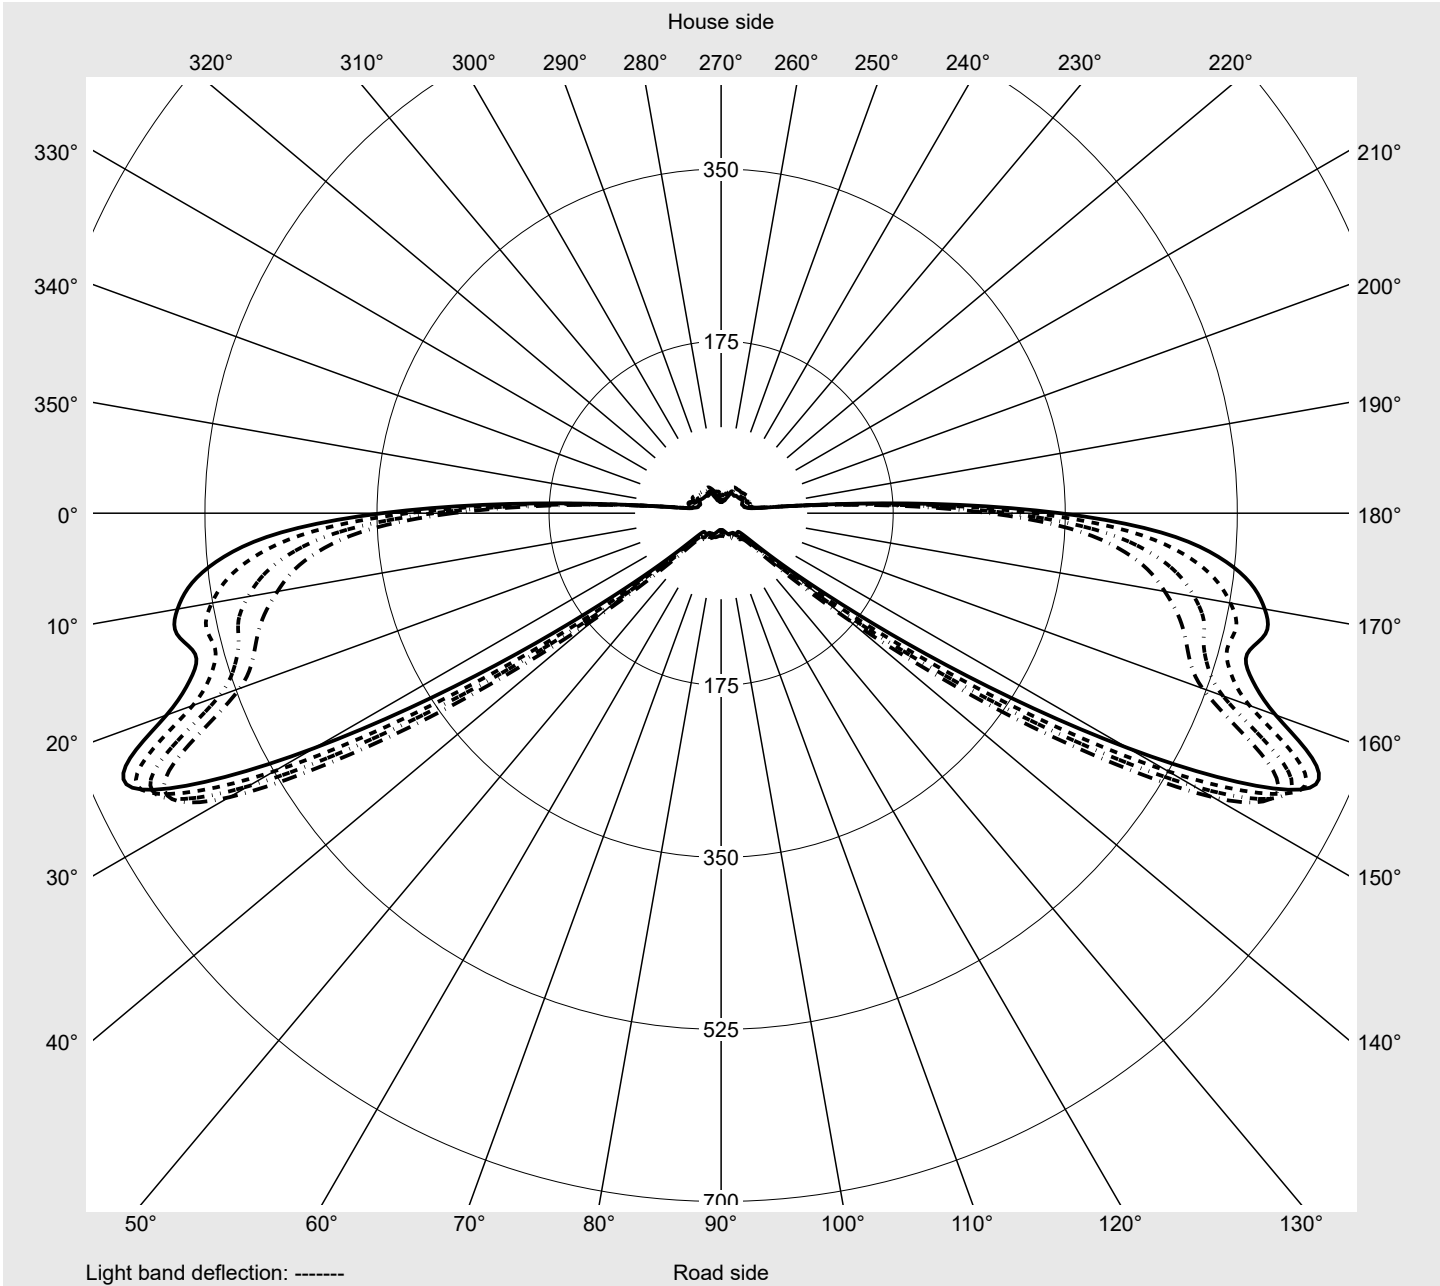

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	308.1	308.8	309.3	310.1	310.8	311.3	311.8	312.4	312.9	313.4	313.7	314.3	314.7	315.1	316.0
5,0°	317.7	319.6	321.6	323.5	325.2	326.6	327.6	328.5	329.3	330.1	331.0	332.4	333.0	333.5	333.7
7,5°	334.5	338.4	342.1	345.1	347.7	349.5	351.2	352.4	353.7	354.6	355.3	355.6	355.6	355.3	354.8
10,0°	351.3	358.1	364.1	369.2	373.3	376.6	379.4	381.6	383.3	384.1	384.6	384.4	383.1	381.3	378.6
12,5°	365.0	374.7	383.1	390.4	396.3	402.2	406.9	411.9	413.7	416.2	416.9	416.3	414.2	410.6	405.9
15,0°	374.3	385.3	394.7	402.2	409.1	415.6	422.0	428.1	430.4	433.1	434.2	433.6	431.6	428.4	425.3
17,5°	366.6	377.4	386.3	393.5	400.0	406.2	412.2	417.2	419.8	421.5	421.3	419.8	417.1	413.9	411.0
20,0°	347.4	357.9	364.2	370.8	374.9	380.5	383.7	388.9	389.3	389.1	385.2	383.5	378.6	376.6	370.5
22,5°	337.6	345.7	350.7	355.3	358.9	362.7	365.0	367.5	364.6	359.8	353.3	347.3	340.8	334.2	327.2
25,0°	343.1	350.8	356.8	361.5	366.2	369.4	371.4	370.6	365.9	359.1	351.2	342.5	333.5	323.5	313.5
27,5°	364.4	373.1	379.9	385.6	390.9	395.0	395.9	392.9	387.3	380.2	372.3	364.0	355.5	347.0	337.5
30,0°	383.2	393.7	402.4	410.0	416.8	421.5	422.0	418.2	412.2	405.2	397.5	390.2	383.3	376.7	368.4
32,5°	389.7	403.3	414.6	425.2	434.7	440.7	441.1	437.1	431.2	424.4	417.4	411.8	406.8	402.3	396.2
35,0°	389.9	408.1	422.8	436.2	448.1	454.9	455.0	450.8	444.2	436.7	430.0	424.8	420.3	416.5	413.7
37,5°	389.4	413.4	432.2	449.5	463.9	471.1	469.9	463.8	455.5	446.4	438.5	432.1	426.8	423.8	424.8
40,0°	389.8	420.3	443.7	464.5	480.6	487.4	485.0	477.2	466.8	455.4	445.6	437.8	432.1	430.1	433.0
42,5°	388.6	425.8	453.7	477.2	494.3	500.9	497.4	487.3	474.9	461.5	450.1	442.0	437.8	438.7	442.0
45,0°	382.6	425.9	457.7	483.1	500.5	506.7	502.1	490.3	475.2	459.4	447.1	440.8	440.7	447.7	460.0
46,0°	378.5	424.2	457.4	483.2	500.5	506.5	501.5	489.1	472.7	455.5	442.7	437.9	441.5	453.3	469.4
47,0°	373.1	421.4	456.4	482.8	499.9	505.7	500.5	487.1	469.1	450.4	437.3	434.5	443.8	462.6	479.9
48,0°	367.7	418.5	455.1	481.8	498.7	504.2	498.6	484.5	465.0	444.9	431.9	432.0	447.1	470.0	486.0
49,0°	361.1	414.7	453.0	480.3	496.8	502.0	496.1	481.3	460.4	439.5	427.5	431.0	450.3	474.7	489.4
50,0°	354.0	410.0	450.3	478.1	494.6	499.5	493.4	477.9	455.7	434.5	424.4	431.2	452.1	475.8	489.4
51,0°	346.9	405.0	447.1	475.4	491.9	496.9	490.7	474.6	451.6	431.0	423.2	431.9	452.4	474.4	486.6
52,0°	338.9	399.3	443.0	472.0	488.9	494.4	488.3	471.8	448.7	429.4	423.9	432.9	450.9	469.4	480.7
53,0°	331.3	393.6	439.0	468.6	485.7	491.8	486.1	469.5	447.1	429.9	425.9	434.0	449.2	464.7	475.3
54,0°	323.8	387.7	434.4	464.5	481.9	488.6	483.7	467.9	447.1	432.0	428.6	435.2	447.5	460.6	472.2
55,0°	315.7	381.2	429.2	459.8	477.6	485.1	481.1	466.9	448.4	435.2	431.9	436.8	446.5	458.6	472.3
56,0°	308.5	375.6	424.4	455.3	473.4	481.6	479.1	466.8	450.7	439.1	435.5	438.7	447.2	459.9	475.6
57,0°	301.2	369.6	419.0	450.0	468.5	477.8	477.1	467.3	453.6	443.4	439.3	441.4	449.8	464.8	481.3
58,0°	294.2	363.8	413.9	445.0	463.8	474.3	475.7	468.1	456.6	447.8	443.5	445.5	455.3	472.8	489.0
59,0°	287.8	358.6	409.3	440.2	459.3	471.2	474.9	469.1	459.4	451.9	448.2	451.4	463.7	482.6	496.5
60,0°	281.2	352.9	404.1	434.7	454.0	467.9	474.1	470.1	462.0	455.9	453.5	459.6	476.1	496.8	505.2
61,0°	275.7	348.2	399.8	430.1	449.8	465.3	473.5	471.2	464.6	460.2	459.9	469.9	489.9	509.8	510.1
62,0°	270.9	343.8	395.4	425.6	445.9	463.0	473.1	472.3	467.5	465.0	467.7	481.9	504.6	522.3	512.5
63,0°	266.1	339.3	390.7	421.0	442.6	461.3	472.8	473.6	471.0	471.0	477.7	496.8	522.5	533.2	507.7
64,0°	262.4	336.0	386.9	417.2	439.9	460.0	472.6	475.0	475.0	478.4	490.0	513.9	539.4	539.5	498.2
65,0°	259.0	332.9	383.5	414.0	437.6	459.0	472.4	476.3	479.3	487.3	504.4	532.5	553.7	539.0	483.0
66,0°	256.6	330.6	380.9	411.6	436.4	458.8	472.5	477.9	484.3	498.3	522.3	552.6	564.1	531.2	460.2
67,0°	255.8	329.5	378.9	409.8	435.4	457.7	472.8	480.0	490.4	511.5	543.0	572.8	569.4	519.5	439.1
68,0°	256.9	330.8	380.0	411.0	436.2	457.8	474.1	483.3	497.7	526.9	566.8	593.5	572.4	504.8	412.3
69,0°	262.1	338.0	387.8	418.7	442.0	461.6	478.2	489.1	507.1	545.2	593.9	614.9	578.0	493.5	388.3
70,0°	273.1	354.5	405.0	437.4	458.2	475.8	488.7	500.0	521.1	567.1	619.4	629.6	577.9	474.0	361.2
71,0°	292.3	380.4	434.2	467.9	488.6	502.8	508.0	519.1	543.1	594.3	640.0	629.2	555.4	441.6	324.0
72,0°	318.8	414.0	471.3	505.8	526.0	536.5	532.9	543.9	571.9	624.9	655.4	616.0	525.2	404.9	284.4

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	316.4	316.7	317.0	317.2	317.9	318.4	318.7	318.5	318.5	318.4	318.7	319.2	319.3	319.4	319.5
5,0°	334.2	333.8	334.5	334.3	334.7	334.4	334.7	334.6	334.1	333.8	333.7	333.1	333.2	332.9	333.0
7,5°	354.1	353.4	352.6	351.5	350.2	349.0	347.8	346.0	344.7	343.2	341.8	340.5	339.2	338.1	337.0
10,0°	376.0	372.5	369.3	365.0	361.2	357.0	352.8	349.2	345.8	342.6	339.7	337.3	335.1	333.0	331.2
12,5°	400.3	393.0	385.1	377.4	369.8	362.7	356.8	351.0	345.7	340.9	336.8	333.2	330.1	327.3	324.8
15,0°	422.3	415.9	407.6	397.9	387.0	376.0	363.8	354.9	346.8	339.9	334.1	328.9	324.4	320.5	317.1
17,5°	407.4	403.1	399.0	393.8	387.9	380.5	368.8	359.1	348.8	339.0	330.7	323.9	318.1	313.0	308.6
20,0°	370.3	364.8	363.7	360.0	358.5	356.2	353.8	350.7	345.5	337.7	328.6	319.8	312.7	307.0	302.0
22,5°	324.7	323.4	323.0	322.5	321.8	321.3	322.5	324.0	325.5	325.9	323.2	317.2	310.3	304.4	299.7
25,0°	305.4	299.2	294.2	291.7	291.4	293.2	296.0	298.2	301.8	306.7	311.3	312.8	311.0	307.2	303.7
27,5°	326.8	314.7	302.3	291.6	283.8	281.8	281.0	282.7	286.5	292.4	300.1	307.7	312.2	312.5	310.8
30,0°	358.5	347.3	334.9	320.1	303.0	290.1	280.6	277.6	279.6	284.8	292.6	302.7	312.5	317.9	318.4
32,5°	390.1	383.0	373.1	358.2	338.8	317.9	298.9	286.6	282.2	285.6	293.9	304.9	316.5	325.1	327.2
35,0°	412.8	410.5	403.1	389.5	370.8	350.0	328.9	311.1	300.6	300.7	308.4	318.5	328.0	335.2	336.5
37,5°	427.9	427.9	422.2	411.3	397.0	383.4	368.5	354.5	342.9	336.3	335.0	337.3	340.2	343.0	343.2
40,0°	436.3	435.4	431.9	430.4	432.0	428.5	419.2	404.4	384.6	363.9	348.8	341.9	339.9	340.5	341.6
42,5°	444.8	449.7	458.7	466.4	467.2	458.0	443.8	422.6	395.1	366.9	344.4	333.2	333.2	338.3	344.5
45,0°	471.7	478.6	481.0	478.9	471.1	456.3	436.7	412.4	386.5	362.1	342.3	332.2	333.6	340.1	345.4
46,0°	481.0	485.1	483.6	476.8	465.0	448.9	429.3	406.9	383.5	360.9	341.8	330.6	329.9	335.0	339.0
47,0°	488.2	488.4	481.5	469.7	455.5	440.6	422.2	401.8	380.0	358.3	338.8	325.5	322.2	325.4	327.7
48,0°	491.2	487.6	477.3	463.5	448.9	433.2	415.5	395.8	374.3	352.4	331.6	315.9	309.3	310.1	309.7
49,0°	491.2	484.0	471.7	457.6	443.2	426.9	408.4	387.8	365.0	342.1	319.7	302.0	292.3	290.6	287.7
50,0°	489.0	479.4	467.2	453.6	437.9	419.4	398.5	375.6	350.3	326.0	302.0	283.0	270.0	266.4	260.2
51,0°	485.7	476.5	465.0	451.1	433.6	410.2	385.4	358.9	331.0	304.9	280.3	259.6	244.7	238.2	231.8
52,0°	482.0	475.5	463.8	447.0	425.1	397.5	367.6	337.4	307.2	280.3	255.6	234.8	218.9	211.2	203.0
53,0°	479.7	476.0	463.1	442.4	415.1	380.2	344.6	311.1	279.6	252.5	228.2	207.9	191.7	182.3	171.4
54,0°	479.7	477.0	462.4	437.7	404.0	360.0	320.0	284.8	253.0	226.4	202.9	183.2	167.5	156.5	144.4
55,0°	482.0	478.2	458.5	424.8	380.3	334.6	292.3	256.3	224.8	199.1	176.9	158.5	143.4	132.2	120.7
56,0°	485.2	478.1	452.2	409.3	358.0	306.7	262.7	226.2	194.9	170.2	149.7	133.5	120.7	111.0	100.4
57,0°	488.5	475.9	439.7	388.7	331.1	279.3	234.3	198.3	167.4	144.5	126.3	113.0	100.6	89.9	79.7
58,0°	490.7	468.6	421.3	362.1	301.7	250.7	205.4	170.2	140.2	120.1	103.6	91.9	79.0	71.2	63.9
59,0°	491.3	459.3	402.7	339.0	277.5	222.8	178.0	143.6	116.0	97.5	83.3	73.4	65.0	59.6	55.0
60,0°	487.7	441.4	375.6	308.4	246.1	194.9	151.0	118.8	94.3	79.1	69.2	62.4	56.3	52.0	48.7
61,0°	479.5	421.8	350.5	281.6	219.5	167.3	125.1	96.3	76.4	65.2	58.8	54.5	50.1	46.7	44.1
62,0°	468.6	402.1	327.6	257.9	195.2	142.7	104.1	79.5	63.7	55.8	52.5	50.0	46.6	43.5	41.4
63,0°	448.5	374.0	296.7	225.8	163.9	119.3	86.3	65.8	53.8	49.6	48.7	47.1	44.1	41.2	39.2
64,0°	429.0	349.4	271.4	199.8	140.1	98.8	71.3	54.6	46.9	45.4	45.5	44.1	41.5	38.9	37.1
65,0°	402.8	321.3	240.0	172.2	116.0	81.9	59.2	47.3	42.7	42.3	42.5	41.0	38.8	36.7	35.0
66,0°	374.2	289.5	209.3	142.9	95.4	67.0	49.8	42.3	39.4	39.3	39.5	38.2	36.0	34.5	32.9
67,0°	348.9	262.5	182.0	120.9	79.2	54.9	43.5	39.0	36.7	36.5	36.6	35.3	33.4	31.9	30.7
68,0°	315.2	226.5	148.9	95.5	60.6	45.7	39.2	36.5	34.4	34.0	33.9	32.9	31.3	30.0	28.8
69,0°	286.1	195.6	124.1	76.6	49.3	39.1	35.9	34.3	32.0	31.4	31.7	30.8	29.0	27.9	26.9
70,0°	252.1	165.7	100.4	61.6	41.0	35.0	33.3	32.4	29.9	29.3	29.7	28.9	27.5	26.7	25.6
71,0°	217.4	134.7	78.5	47.2	34.4	31.5	30.7	30.2	27.6	27.1	27.2	26.7	26.0	25.8	24.9
72,0°	185.4	111.2	61.4	37.3	29.8	28.3	28.1	27.9	25.7	24.9	25.0	24.6	24.6	24.6	23.7

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	319.6	320.3	320.4	320.5	320.5	320.5	320.6	307.4	306.6	305.7	304.9	304.1	303.3	302.5	301.7
5,0°	332.8	332.3	332.4	332.0	331.9	331.9	331.6	315.8	314.0	312.2	310.1	308.0	305.9	303.8	301.9
7,5°	335.8	334.8	333.9	333.1	332.6	332.3	332.2	330.4	326.4	322.7	319.0	315.0	311.1	307.1	303.3
10,0°	329.4	327.9	326.6	325.5	324.6	324.0	324.0	344.4	337.6	331.0	325.0	318.7	312.8	307.1	301.5
12,5°	322.6	320.6	318.8	317.3	316.2	315.1	315.2	355.2	345.5	336.4	327.9	320.0	312.5	305.2	298.1
15,0°	314.3	311.8	309.6	307.8	306.3	305.1	304.9	362.8	351.5	341.2	332.3	324.8	316.4	308.1	300.0
17,5°	305.0	302.1	299.6	297.6	296.0	294.8	294.4	354.5	342.5	332.0	323.3	317.1	310.9	305.2	300.2
20,0°	297.9	294.7	292.3	290.3	288.9	288.1	287.9	335.9	322.0	310.8	299.8	290.8	282.7	277.5	271.8
22,5°	296.0	293.1	291.0	289.7	289.0	288.8	288.7	326.1	311.7	297.9	284.1	271.1	259.0	247.9	233.0
25,0°	301.4	299.9	298.7	298.2	298.3	298.6	298.5	331.2	315.9	298.6	280.3	260.1	239.3	214.6	187.6
27,5°	309.2	308.4	307.6	307.3	307.4	307.9	308.1	352.2	335.4	315.0	292.1	266.2	235.2	197.2	161.6
30,0°	316.8	315.7	314.8	314.1	313.7	314.0	314.4	369.6	351.6	329.1	302.6	270.7	231.0	186.0	152.9
32,5°	324.4	321.1	318.5	316.5	314.9	313.8	313.7	373.3	352.9	327.9	297.7	258.9	212.1	170.0	147.0
35,0°	331.2	324.6	319.6	316.2	313.4	311.3	310.4	368.2	343.5	314.5	279.1	233.0	183.4	152.3	139.8
37,5°	337.4	328.9	322.2	317.9	314.9	312.6	311.5	360.8	330.0	296.2	252.7	199.6	157.7	138.7	135.4
40,0°	338.4	330.6	323.8	319.3	316.4	314.6	314.1	353.5	315.8	275.9	222.7	168.6	137.6	131.2	131.7
42,5°	346.2	341.7	336.4	334.0	332.2	332.0	331.2	344.6	299.7	250.6	190.5	143.5	126.1	125.5	126.0
45,0°	346.9	342.5	338.3	336.3	336.6	336.8	336.9	331.8	280.5	222.3	160.9	124.3	117.0	118.3	120.2
46,0°	339.6	335.3	331.8	330.6	331.5	331.7	332.1	325.1	271.5	210.7	150.4	118.6	112.9	114.5	117.0
47,0°	327.4	323.1	320.0	318.5	319.7	320.3	321.0	317.3	261.5	198.6	140.4	113.4	110.0	112.1	114.3
48,0°	307.8	302.7	300.0	298.5	300.0	300.0	301.7	309.5	251.7	187.5	132.0	108.8	106.5	109.3	110.9
49,0°	284.6	279.0	276.1	273.5	275.2	274.7	277.1	300.8	240.9	176.0	124.1	104.0	102.1	106.3	107.7
50,0°	257.2	248.9	247.1	241.0	245.0	241.1	247.2	291.3	229.9	164.9	116.7	99.4	98.7	103.4	104.4
51,0°	226.1	216.8	210.7	203.9	204.2	201.1	204.1	282.2	219.2	154.6	110.0	95.2	94.9	99.8	100.4
52,0°	193.4	178.9	171.2	163.6	163.7	160.8	162.9	272.2	207.9	144.5	103.2	91.0	93.1	96.9	96.8
53,0°	157.3	142.6	134.9	129.0	128.7	127.0	127.7	263.1	197.8	135.9	96.6	85.8	92.5	96.3	93.9
54,0°	130.0	116.6	110.4	106.6	106.7	105.2	105.6	254.0	187.8	127.7	89.8	77.9	80.9	90.3	91.2
55,0°	108.7	98.6	93.6	90.3	89.8	87.9	88.4	244.5	177.7	119.9	83.7	70.6	70.0	78.2	84.8
56,0°	89.1	79.9	76.0	73.7	73.4	71.8	72.5	235.9	169.1	113.3	79.2	66.5	65.4	69.3	74.6
57,0°	72.1	66.7	64.0	62.7	62.6	61.2	61.9	227.6	160.9	107.2	75.1	63.5	62.8	65.3	67.5
58,0°	60.4	56.6	55.5	54.6	55.0	53.2	54.3	219.6	153.6	101.8	71.4	60.9	60.8	63.2	64.6
59,0°	52.4	50.1	49.2	48.8	48.9	47.7	48.1	212.3	147.1	97.1	68.2	58.8	58.8	61.2	61.8
60,0°	47.0	45.2	44.5	44.8	44.8	44.1	44.0	205.1	140.7	92.5	65.1	56.9	57.3	59.5	59.6
61,0°	42.9	41.8	41.6	42.3	42.2	41.9	41.9	199.1	135.3	88.4	62.4	55.3	56.1	58.0	57.6
62,0°	40.5	39.5	39.5	40.3	40.4	40.0	40.0	193.8	130.0	83.9	59.4	53.5	54.7	56.4	55.3
63,0°	38.4	37.5	37.5	38.5	38.4	38.2	38.0	187.8	122.6	77.5	55.7	51.3	53.3	54.9	53.4
64,0°	36.3	35.5	35.7	36.4	36.5	36.1	36.1	181.9	113.9	70.4	51.9	48.9	51.1	52.7	51.1
65,0°	34.3	33.6	33.9	34.5	35.1	34.1	33.8	175.7	105.1	64.0	48.3	46.1	48.2	50.1	48.5
66,0°	32.4	31.8	32.3	32.9	33.2	31.9	31.8	171.5	98.8	59.6	45.2	43.6	46.1	47.8	46.3
67,0°	30.3	30.3	30.8	31.0	30.7	29.6	29.7	169.3	95.0	56.0	42.3	41.1	43.1	44.2	42.4
68,0°	28.5	28.7	29.1	29.0	28.2	27.5	27.6	168.9	92.3	52.6	39.2	38.3	40.7	42.0	39.7
69,0°	26.8	26.9	26.8	26.3	25.7	25.3	25.3	171.0	91.1	49.7	36.5	35.5	37.7	38.4	36.7
70,0°	25.3	25.0	24.5	23.8	23.4	23.1	23.2	176.6	91.3	46.9	33.6	32.5	34.1	34.8	33.4
71,0°	24.0	23.1	22.3	21.5	21.3	20.8	21.2	187.1	93.6	44.6	30.8	29.5	30.4	31.1	29.9
72,0°	22.6	21.5	20.5	19.7	19.2	18.9	19.6	202.6	97.4	43.4	29.6	27.0	26.6	27.3	26.5

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	300.8	300.0	299.2	298.5	297.9	297.2	296.6	295.6	295.1	294.7	293.9	293.0	292.2	291.8	291.4
5,0°	299.9	297.9	295.8	293.9	292.0	290.0	288.1	286.3	285.1	283.1	281.6	279.9	278.1	276.7	275.1
7,5°	299.3	295.5	291.9	288.2	284.6	281.2	277.8	274.5	271.1	268.5	265.5	262.6	259.7	257.0	254.2
10,0°	295.8	290.5	285.1	279.9	274.8	269.7	264.6	259.6	254.3	250.9	245.7	240.6	235.0	228.9	224.1
12,5°	291.1	284.9	278.4	271.7	264.4	256.9	248.5	239.9	230.8	221.7	212.5	203.3	196.6	189.1	183.5
15,0°	292.0	284.1	275.3	264.8	252.6	239.9	227.6	215.3	204.7	194.9	185.8	179.6	174.4	169.4	164.7
17,5°	294.8	286.5	271.0	256.3	241.4	227.2	214.9	204.5	195.6	187.5	180.0	172.4	165.0	157.9	151.1
20,0°	265.4	252.3	241.8	231.6	225.4	220.0	214.3	206.8	197.1	186.1	175.0	164.1	154.5	146.3	139.3
22,5°	216.2	200.7	193.5	192.2	193.9	195.8	196.1	193.8	188.2	179.8	170.0	159.5	149.6	141.1	134.0
25,0°	165.2	153.2	152.2	156.0	159.5	162.5	164.3	165.4	165.1	163.0	158.6	152.3	144.9	136.3	127.5
27,5°	137.8	126.7	123.1	123.9	126.3	131.0	136.3	140.1	141.1	140.2	138.4	135.9	131.3	124.8	117.9
30,0°	135.2	125.1	117.8	113.7	111.8	112.0	113.5	115.5	117.7	119.5	119.7	119.0	115.4	109.3	103.7
32,5°	135.3	128.6	124.1	119.1	114.6	109.5	105.2	102.3	101.4	101.5	101.2	98.6	96.3	94.2	91.4
35,0°	135.5	132.2	127.1	121.5	115.0	108.7	102.7	96.5	90.3	85.3	82.4	80.7	79.5	77.8	76.5
37,5°	134.1	130.4	125.7	118.9	112.1	105.3	96.7	86.7	78.5	73.7	71.1	68.9	68.4	69.0	69.6
40,0°	130.1	126.5	120.3	113.5	106.7	96.5	84.8	76.1	70.8	67.4	65.0	63.4	62.6	62.7	63.7
42,5°	125.1	120.2	113.4	106.5	95.6	83.2	74.7	69.7	66.3	63.3	60.9	59.2	58.7	59.0	59.8
45,0°	118.4	112.1	106.0	95.2	82.0	72.8	67.7	64.4	61.8	59.8	58.1	57.0	56.4	56.3	56.7
46,0°	114.6	108.5	101.3	89.3	77.1	69.3	65.0	62.2	60.2	58.6	57.3	56.4	55.7	55.4	55.7
47,0°	111.3	105.7	97.0	83.9	72.7	66.2	62.5	60.2	58.7	57.5	56.6	55.8	55.2	54.8	54.8
48,0°	107.4	101.8	92.1	78.9	69.0	63.5	60.4	58.6	57.5	56.6	55.8	55.2	54.6	54.2	54.1
49,0°	103.6	97.5	86.4	73.8	65.4	60.9	58.5	57.2	56.4	55.7	55.1	54.5	53.9	53.5	53.4
50,0°	100.6	93.7	81.6	69.5	62.3	58.6	56.9	56.0	55.4	54.8	54.3	53.9	53.3	52.9	52.7
51,0°	97.0	89.0	76.0	65.2	59.5	56.7	55.5	54.8	54.3	53.9	53.5	53.1	52.6	52.2	52.1
52,0°	93.4	84.5	71.3	61.6	57.1	55.1	54.2	53.7	53.3	53.0	52.7	52.3	51.9	51.5	51.4
53,0°	89.7	80.2	67.1	58.7	55.3	53.8	53.0	52.6	52.3	52.1	51.8	51.6	51.2	50.8	50.7
54,0°	85.9	74.6	62.3	55.9	53.6	52.4	51.8	51.5	51.3	51.1	50.8	50.6	50.3	50.1	49.9
55,0°	82.0	70.0	58.6	53.7	52.0	51.1	50.6	50.4	50.3	50.1	49.9	49.7	49.5	49.4	49.2
56,0°	75.1	65.9	56.0	52.0	50.6	49.8	49.3	49.2	49.1	49.1	48.9	48.9	48.8	48.7	48.3
57,0°	66.5	59.5	53.1	50.4	49.2	48.5	48.1	48.0	47.9	47.9	47.9	47.9	47.8	47.8	47.5
58,0°	61.1	53.8	50.2	48.9	47.8	47.2	46.9	46.7	46.6	46.6	46.9	46.9	46.8	46.8	46.7
59,0°	56.8	48.9	46.3	46.6	46.5	46.1	45.7	45.5	45.4	45.6	45.8	45.7	45.7	45.7	45.6
60,0°	54.0	46.5	43.7	44.1	45.1	44.9	44.5	44.2	44.2	44.4	44.6	44.7	44.6	44.7	44.6
61,0°	51.6	44.9	42.4	42.5	43.8	43.7	43.4	43.1	43.1	43.3	43.4	43.5	43.4	43.6	43.5
62,0°	49.0	43.3	41.2	41.4	42.6	42.5	42.2	41.9	41.8	42.0	42.1	42.1	42.1	42.2	42.2
63,0°	46.9	41.9	40.4	40.8	41.5	41.3	41.0	40.8	40.6	40.7	40.8	40.8	40.8	41.0	41.0
64,0°	44.9	40.6	39.6	40.4	40.5	40.1	39.9	39.7	39.4	39.4	39.3	39.5	39.4	39.6	39.5
65,0°	42.5	39.2	38.8	39.7	39.4	38.9	38.6	38.5	38.1	38.0	37.9	38.1	38.0	38.0	38.1
66,0°	40.7	38.1	37.7	38.7	38.3	37.7	37.4	37.2	36.8	36.5	36.4	36.6	36.4	36.5	36.7
67,0°	38.0	36.5	36.4	37.4	37.0	36.4	36.1	35.8	35.3	35.0	34.8	34.8	34.6	34.6	34.8
68,0°	35.8	34.9	35.5	36.0	35.5	34.9	34.6	34.3	33.7	33.3	33.0	33.0	32.9	33.0	33.3
69,0°	33.4	33.3	34.5	34.8	34.0	33.3	33.0	32.7	32.1	31.6	31.2	31.2	31.1	31.2	31.5
70,0°	30.8	31.0	32.7	33.0	32.4	31.6	31.1	30.8	30.2	29.8	29.4	29.6	29.5	29.2	29.5
71,0°	28.2	28.5	30.3	31.0	30.4	29.5	29.0	28.6	28.1	27.8	27.5	27.8	27.4	27.1	27.0
72,0°	25.4	25.9	27.1	28.0	28.0	27.2	26.5	26.2	25.9	25.8	25.6	25.6	24.8	24.6	24.4

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	0.5	0.5
2,5°	290.8	290.1	289.6	289.3	289.0	288.5	288.4	288.3	287.9	287.7	287.4	287.7	288.1	3.7	4.1
5,0°	273.6	272.1	271.1	269.8	268.7	268.1	267.1	266.4	265.9	265.5	265.0	264.7	264.9	7.4	11.5
7,5°	251.6	249.3	246.8	244.8	242.7	240.9	239.3	237.8	236.7	235.9	235.1	234.5	234.5	11.1	22.6
10,0°	218.0	213.6	208.8	204.6	200.9	197.3	194.4	192.0	189.7	188.2	187.0	185.9	186.6	14.5	37.1
12,5°	178.2	173.7	169.8	166.3	163.3	160.7	158.3	156.5	154.8	153.6	152.7	151.8	152.0	17.8	54.9
15,0°	160.0	155.3	150.9	146.8	143.0	139.8	136.9	134.5	132.5	130.9	129.8	128.9	129.1	21.1	76.0
17,5°	144.9	139.3	134.3	129.9	126.2	123.0	120.3	118.0	116.2	114.9	114.0	113.4	113.1	23.8	99.8
20,0°	133.8	129.3	125.2	121.6	118.0	114.8	111.8	109.2	107.1	105.4	104.5	103.6	103.8	25.4	125.2
22,5°	127.8	122.2	116.9	112.2	107.9	104.1	100.9	98.2	96.1	94.5	93.5	92.8	92.7	26.5	151.7
25,0°	119.2	111.8	105.9	102.0	99.3	97.4	95.6	93.7	91.7	89.9	88.7	87.8	87.7	28.0	179.7
27,5°	110.9	104.4	98.6	94.1	90.8	88.5	86.9	85.7	84.7	83.6	82.8	82.1	82.0	30.5	210.3
30,0°	99.1	95.5	92.2	88.3	83.2	78.3	74.9	72.7	71.4	70.3	69.7	69.2	69.0	33.5	243.8
32,5°	87.0	82.3	78.2	75.1	72.7	70.9	69.5	68.4	67.5	66.7	66.3	65.8	65.8	36.6	280.4
35,0°	75.5	74.4	72.8	70.8	69.0	67.5	66.4	65.6	64.9	64.3	64.0	63.5	63.3	39.5	319.9
37,5°	69.5	69.0	68.6	67.9	66.9	65.9	64.9	63.9	63.0	62.2	61.5	60.9	60.6	42.5	362.5
40,0°	64.9	65.5	65.7	65.4	64.7	63.4	62.3	61.2	60.5	59.7	59.0	58.2	58.2	45.4	407.9
42,5°	60.9	61.9	62.3	62.1	61.7	61.0	60.3	59.7	58.9	58.1	57.1	56.4	56.2	48.1	456.0
45,0°	57.5	58.4	59.2	59.4	59.0	58.3	57.8	57.3	56.8	55.9	55.0	54.1	53.8	34.8	490.8
46,0°	56.4	57.3	57.9	57.9	57.7	57.4	57.3	56.9	56.2	55.4	54.4	53.5	53.2	20.1	510.9
47,0°	55.3	56.2	56.9	57.0	57.0	57.0	56.9	56.4	55.7	54.7	53.6	52.7	52.5	20.2	531.1
48,0°	54.4	55.1	55.9	56.3	56.5	56.5	56.3	55.9	55.3	54.1	53.0	52.0	51.8	20.1	551.2
49,0°	53.6	54.2	55.1	55.7	55.8	55.9	55.8	55.3	54.6	53.3	52.1	51.1	50.9	19.9	571.2
50,0°	52.9	53.5	54.4	55.1	55.4	55.4	55.3	54.7	53.9	52.6	51.3	50.2	49.9	19.6	590.8
51,0°	52.3	52.7	53.6	54.3	54.9	54.9	54.7	54.0	52.9	51.8	50.4	49.1	48.8	19.2	610.1
52,0°	51.6	52.1	52.8	53.8	54.4	54.3	54.0	53.1	52.1	50.8	49.2	48.0	47.6	18.7	628.8
53,0°	50.9	51.4	52.2	53.0	53.6	53.6	53.2	52.3	51.1	49.8	48.2	46.8	46.3	18.2	647.0
54,0°	49.9	50.4	51.4	52.1	52.6	52.7	52.4	51.4	50.0	48.6	47.1	45.7	45.1	17.8	664.8
55,0°	49.2	49.8	50.6	51.3	51.8	51.7	51.5	50.5	49.1	47.5	46.0	44.5	44.2	17.3	682.1
56,0°	48.3	48.8	49.6	50.4	50.9	50.8	50.3	49.3	48.1	46.3	45.0	43.4	43.0	16.8	698.9
57,0°	47.4	47.7	48.6	49.5	50.0	49.8	49.0	48.1	46.7	45.2	43.8	42.5	41.9	16.4	715.3
58,0°	46.5	46.5	47.3	48.3	49.1	48.7	47.9	46.8	45.4	44.0	42.8	41.5	41.0	16.0	731.4
59,0°	45.2	45.2	45.8	46.7	47.6	47.5	46.6	45.4	44.0	42.7	41.5	40.5	40.0	15.7	747.1
60,0°	44.3	43.9	44.3	45.3	46.2	46.1	45.4	44.4	42.8	41.3	40.3	39.5	39.4	15.4	762.5
61,0°	43.1	42.6	42.8	43.8	44.7	44.8	44.3	43.4	41.7	40.0	38.9	38.3	38.4	15.2	777.6
62,0°	41.8	41.3	41.3	42.0	42.9	43.0	42.6	41.8	40.1	38.2	37.3	36.7	36.8	15.0	792.6
63,0°	40.7	40.3	40.1	40.3	41.4	41.4	40.9	39.9	38.2	36.6	35.8	35.3	35.4	14.7	807.4
64,0°	39.5	39.1	38.9	38.9	39.5	39.1	38.8	37.6	36.3	34.7	34.2	33.8	34.1	14.5	821.9
65,0°	38.2	38.2	37.9	37.4	37.3	36.9	36.5	35.4	34.4	32.7	32.3	31.9	32.2	14.3	836.2
66,0°	37.1	37.2	37.0	35.8	35.1	34.2	33.7	33.0	32.3	31.0	30.3	29.9	30.4	14.1	850.3
67,0°	35.6	35.7	35.0	33.4	32.1	31.3	31.1	30.6	30.2	28.9	28.0	27.5	27.8	13.9	864.2
68,0°	34.0	33.8	32.8	31.4	30.1	28.9	28.7	28.0	27.6	26.1	25.7	25.3	25.3	13.7	877.8
69,0°	32.1	31.4	30.9	29.4	28.0	26.1	25.9	25.2	25.1	24.0	23.6	22.7	23.0	13.6	891.4
70,0°	29.5	29.5	28.8	27.2	25.5	23.5	22.8	22.7	22.0	22.2	21.4	20.4	20.5	13.6	905.0
71,0°	27.2	27.6	26.8	24.9	22.8	20.5	19.6	20.5	19.3	20.7	18.9	18.0	18.0	13.6	918.6
72,0°	25.0	24.9	24.4	21.7	20.0	17.7	16.6	17.6	17.3	17.0	15.7	15.0	15.2	13.7	932.3

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
--	--	--------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	344.9	447.8	507.5	542.8	561.4	567.1	553.8	566.9	600.3	650.6	660.7	591.8	477.7	349.1	231.2
74,0°	352.2	458.6	518.1	551.3	570.9	574.4	557.7	575.6	615.5	657.3	646.7	555.6	425.9	295.7	179.8
75,0°	324.1	422.3	480.5	511.8	538.1	546.6	531.6	556.8	602.4	629.9	604.7	507.1	371.5	222.9	117.1
76,0°	241.2	309.5	358.5	381.0	417.1	439.4	460.2	496.0	545.8	557.7	526.9	433.9	295.2	139.9	62.5
77,0°	150.2	185.1	212.0	226.8	258.3	284.6	344.4	387.7	438.0	439.6	413.4	330.6	209.0	86.4	36.0
78,0°	84.0	97.0	114.3	117.0	139.8	156.0	222.4	262.1	304.9	299.8	280.3	205.9	112.3	39.9	21.4
79,0°	37.7	43.8	50.1	53.9	65.3	79.2	127.4	158.4	188.8	180.6	159.4	96.4	35.5	15.5	12.4
80,0°	17.0	18.5	20.7	22.2	26.3	31.9	62.5	81.1	99.6	98.2	78.1	38.2	14.5	10.2	9.7
81,0°	8.6	9.0	9.8	10.7	12.1	13.9	26.2	30.6	37.9	40.4	30.7	14.9	8.5	7.6	7.4
82,0°	5.8	6.0	6.4	7.0	7.6	7.8	11.4	11.1	12.4	14.5	10.7	7.1	6.0	5.9	5.6
83,0°	4.4	4.4	4.8	5.1	5.4	5.5	6.2	6.0	6.5	7.5	6.5	5.0	4.4	4.7	4.9
84,0°	3.1	3.1	3.3	3.3	3.6	3.5	3.9	3.8	4.1	4.4	4.3	3.6	3.1	3.2	3.3
85,0°	2.4	2.4	2.5	2.5	2.5	2.3	2.6	2.5	2.7	2.8	2.8	2.5	2.4	2.3	2.5
86,0°	2.0	1.8	2.0	1.8	1.8	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.6	1.5	1.6
87,0°	1.5	1.5	1.5	1.3	1.3	1.3	1.4	1.3	1.3	1.2	1.3	1.1	1.0	1.0	1.0
88,0°	1.3	1.3	1.2	1.0	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.7	0.8	0.8
89,0°	1.0	1.0	1.0	1.1	0.9	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	140.1	81.8	45.1	29.6	25.7	25.7	25.8	26.0	24.1	23.0	23.0	22.6	22.9	23.0	21.9
74,0°	96.0	52.5	31.7	24.5	22.9	23.3	23.6	24.0	22.8	21.6	21.4	21.0	21.1	20.8	20.1
75,0°	55.3	31.2	23.0	22.8	22.9	22.2	22.0	22.2	21.4	20.5	20.1	19.8	19.3	19.1	18.4
76,0°	30.4	20.5	18.7	21.3	23.3	22.2	21.7	20.9	19.6	18.9	18.2	17.9	17.3	17.2	16.5
77,0°	20.8	16.4	15.8	16.5	18.3	20.6	21.0	20.0	18.0	17.2	16.2	15.8	15.0	14.9	14.3
78,0°	15.1	13.2	12.9	13.7	14.4	16.9	18.0	18.2	16.9	15.8	14.6	13.9	12.7	12.6	11.8
79,0°	11.2	10.6	10.6	11.5	12.5	13.4	14.0	14.9	14.5	14.0	12.5	11.7	10.5	10.4	9.3
80,0°	8.9	8.4	8.6	9.5	10.0	10.8	10.8	11.1	11.2	11.5	10.8	9.9	8.5	8.2	7.3
81,0°	6.8	6.5	7.1	7.8	7.8	8.3	8.2	8.2	8.5	9.1	9.0	8.5	6.8	6.3	5.7
82,0°	5.5	5.0	5.3	5.9	6.2	6.2	6.2	6.3	6.5	7.2	7.4	6.8	5.3	4.7	4.3
83,0°	4.3	4.2	4.4	4.6	4.2	4.5	4.6	4.7	4.8	5.5	5.6	5.1	4.0	3.6	3.4
84,0°	3.3	3.1	3.4	3.3	2.9	3.1	3.0	3.3	3.5	3.8	4.0	3.7	2.9	2.7	2.5
85,0°	2.3	2.3	2.6	2.1	2.1	2.1	2.0	2.2	2.2	2.6	2.5	2.4	2.0	1.9	1.8
86,0°	1.4	1.8	1.6	1.6	1.2	1.4	1.4	1.5	1.3	1.5	1.4	1.5	1.4	1.4	1.2
87,0°	0.9	0.9	1.1	1.0	1.0	1.0	0.9	1.1	1.0	1.0	0.9	0.9	0.9	0.9	0.8
88,0°	0.9	0.9	0.5	0.7	0.6	0.7	0.7	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6
89,0°	0.5	0.5	0.5	0.4	0.8	0.5	0.5	0.5	0.6	0.5	0.5	0.4	0.4	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	20.8	19.7	18.6	17.8	17.2	17.1	17.7	216.1	98.5	42.3	30.5	26.5	24.3	24.2	23.5
74,0°	19.3	18.2	17.0	16.1	15.5	15.3	15.6	214.2	91.6	39.1	30.0	26.7	24.1	22.1	21.4
75,0°	18.0	16.8	15.6	14.5	13.9	13.6	13.6	185.3	74.2	32.2	26.2	24.3	21.8	19.5	18.6
76,0°	16.5	15.2	14.0	12.9	12.2	11.7	11.7	124.9	46.9	23.2	21.4	20.5	18.5	17.2	16.3
77,0°	14.2	12.9	12.0	10.9	10.2	9.7	9.7	73.0	28.3	18.2	17.7	17.2	15.9	14.9	14.4
78,0°	11.9	10.7	10.0	9.2	8.6	7.9	8.1	38.9	19.9	17.5	15.1	14.4	13.1	12.4	12.3
79,0°	9.7	8.5	8.3	7.6	7.2	6.4	6.7	19.9	14.6	16.2	12.7	11.9	11.5	11.0	10.5
80,0°	7.5	6.9	6.4	6.0	5.6	5.1	5.1	11.3	10.3	11.9	9.8	9.5	9.3	8.9	8.6
81,0°	5.9	5.5	5.1	4.7	4.5	4.0	4.1	7.3	7.0	7.5	7.1	7.3	7.1	7.1	6.8
82,0°	4.5	4.1	3.9	3.8	3.6	3.2	3.2	5.4	5.4	5.4	5.5	5.7	5.7	5.6	5.5
83,0°	3.3	3.1	3.0	2.9	2.8	2.5	2.5	4.2	4.3	4.2	4.3	4.3	4.0	4.1	4.2
84,0°	2.4	2.3	2.2	2.2	2.1	2.0	2.1	3.1	3.3	3.2	3.3	3.2	3.3	3.1	3.0
85,0°	1.8	1.6	1.5	1.5	1.5	1.4	1.4	2.4	2.6	2.5	2.6	2.6	2.4	2.4	2.6
86,0°	1.2	1.0	1.0	1.0	1.0	0.9	0.9	1.9	2.0	1.9	2.0	1.9	1.8	1.9	1.8
87,0°	0.8	0.8	0.8	0.7	0.7	0.6	0.7	1.5	1.6	1.6	1.6	1.6	1.5	1.3	1.4
88,0°	0.6	0.6	0.5	0.3	0.5	0.3	0.5	1.3	1.3	1.3	1.3	1.3	1.4	1.3	1.1
89,0°	0.3	0.3	0.3	0.3	0.3	0.2	0.2	1.0	1.1	1.1	1.1	1.1	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	22.9	23.6	24.3	25.3	25.5	24.7	24.1	23.8	23.5	23.5	23.4	23.3	22.1	22.2	22.5
74,0°	20.7	21.3	22.0	22.9	23.0	22.4	21.7	21.3	20.9	20.9	20.7	20.3	20.2	20.5	20.9
75,0°	18.0	18.1	18.8	20.0	20.4	20.0	19.2	18.7	18.2	18.0	17.7	17.8	18.2	19.2	19.4
76,0°	15.9	15.9	16.3	17.2	17.6	17.5	16.6	16.2	15.5	15.1	15.0	15.5	15.7	16.3	16.9
77,0°	13.5	13.6	13.5	14.5	14.9	15.1	14.1	13.7	13.0	12.7	12.4	12.4	12.1	13.0	13.8
78,0°	12.0	11.5	11.5	11.9	12.3	12.7	11.7	11.3	10.6	10.3	10.0	9.7	9.7	10.2	10.5
79,0°	10.2	9.9	9.7	9.9	10.3	10.5	9.6	9.2	8.6	8.2	7.9	7.9	7.8	8.0	8.0
80,0°	8.3	8.3	7.9	7.9	8.4	8.4	7.8	7.5	6.9	6.5	6.2	5.9	5.7	5.9	6.0
81,0°	6.8	6.5	6.5	6.4	6.6	6.7	6.3	5.9	5.4	5.0	4.7	4.5	4.2	4.3	4.4
82,0°	5.4	5.3	5.0	5.2	5.4	5.3	5.0	4.7	4.2	3.8	3.5	3.3	3.0	3.1	3.1
83,0°	3.8	4.0	3.8	3.9	4.2	4.2	3.9	3.5	3.1	2.8	2.6	2.4	2.3	2.3	2.0
84,0°	3.1	2.9	2.9	2.9	3.1	3.1	2.9	2.5	2.2	2.0	1.9	1.8	1.6	1.6	1.5
85,0°	2.3	2.2	2.0	2.0	2.2	2.2	2.0	1.8	1.5	1.4	1.3	1.2	1.1	1.1	0.8
86,0°	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3	1.1	1.1	1.0	0.8	0.8	0.7	0.7
87,0°	1.4	1.4	1.4	1.4	1.3	1.1	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.6	0.6
88,0°	1.1	1.1	1.0	1.1	1.1	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.6	0.6	0.6
89,0°	0.9	1.0	1.2	0.8	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	22.9	22.8	21.9	18.7	16.7	14.7	13.4	13.8	14.1	11.9	11.6	11.3	11.7	13.7	945.9
74,0°	21.2	20.7	19.7	15.9	12.8	11.1	10.4	10.6	11.1	9.0	8.6	8.3	8.5	13.2	959.1
75,0°	19.7	18.6	17.3	13.8	10.6	9.1	8.7	8.2	8.7	7.3	7.1	6.5	6.7	12.1	971.3
76,0°	17.0	15.9	14.3	11.8	9.5	7.7	7.2	6.5	6.7	5.4	5.0	4.6	4.6	9.9	981.2
77,0°	14.2	12.9	11.3	8.6	7.1	6.0	5.9	4.8	4.4	3.7	3.2	2.8	3.0	7.2	988.4
78,0°	11.1	10.3	9.0	6.9	5.4	4.5	4.0	3.4	2.9	2.3	1.8	1.6	1.6	4.6	993.0
79,0°	8.5	8.0	7.4	5.5	4.2	3.6	3.1	2.4	2.1	1.5	1.2	0.9	0.9	2.7	995.7
80,0°	6.3	5.8	5.5	4.3	3.3	2.7	2.2	1.8	1.5	1.0	0.7	0.7	0.5	1.6	997.3
81,0°	4.4	4.3	4.1	3.0	2.4	2.0	1.6	1.5	1.0	0.7	0.6	0.5	0.5	0.9	998.2
82,0°	3.0	3.0	3.2	2.2	1.8	1.4	1.2	1.0	0.9	0.5	0.5	0.5	0.5	0.6	998.7
83,0°	1.9	2.0	1.9	1.4	1.2	0.9	0.9	0.8	0.7	0.5	0.5	0.2	0.2	0.4	999.1
84,0°	1.4	1.7	1.2	0.9	0.8	0.7	0.7	0.6	0.5	0.5	0.2	0.2	0.2	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.7
87,0°	0.5	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.9
89,0°	0.6	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
Dimming levels table		siteco
environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5990	39.8	41.2	40.5
95	241	252	5683	37.3	38.6	38.0
90	229	250	5400	35.0	36.3	35.6
85	216	248	5094	32.7	33.8	33.2
80	203	246	4787	30.4	31.4	30.9
75	190	243	4481	28.1	29.1	28.6
70	178	241	4198	26.1	27.0	26.6
65	165	238	3891	24.0	24.8	24.4
60	152	235	3585	21.9	22.7	22.3
55	140	232	3302	20.0	20.7	20.4
50	127	229	2995	18.0	18.7	18.4
45	114	225	2688	16.1	16.6	16.4
40	102	221	2405	14.3	14.8	14.6
35	89	216	2099	12.5	12.9	12.7
30	76	210	1792	10.7	11.0	10.8
25	63	203	1486	8.9	9.2	9.0
20	51	195	1203	7.3	7.5	7.4
15	38	184	896	5.6	5.8	5.7
10	25	169	590	4.0	4.1	4.0
9	24	168	566	3.8	4.0	3.9

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5990	39.4	40.5	40.0
95	241	252	5683	36.9	38.0	37.4
90	229	250	5400	34.7	35.7	35.2
85	216	248	5094	32.4	33.4	32.9
80	203	246	4787	30.2	31.1	30.6
75	191	244	4504	28.2	29.0	28.6
70	178	241	4197	26.1	26.7	26.4
65	165	238	3891	23.9	24.6	24.2
60	152	235	3584	21.8	22.5	22.2
55	140	232	3301	20.0	20.5	20.2
50	127	229	2995	18.1	18.5	18.3
45	114	225	2688	16.1	16.5	16.3
40	102	221	2405	14.3	14.7	14.5
35	89	216	2099	12.5	12.8	12.6
30	76	210	1792	10.7	11.0	10.8
25	64	204	1509	9.0	9.2	9.1
20	51	195	1203	7.3	7.5	7.4
15	38	184	896	5.7	5.8	5.8
10	25	169	590	4.0	4.1	4.0
9	24	168	566	3.9	3.9	3.9

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
--	--	--------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5990	39.5	40.8	40.2
95	241	252	5683	37.0	38.2	37.6
90	229	250	5400	34.8	36.0	35.4
85	216	248	5094	32.6	33.6	33.1
80	203	246	4787	30.2	31.2	30.7
75	191	244	4504	28.2	29.1	28.6
70	178	241	4198	26.0	26.9	26.4
65	165	238	3891	23.9	24.7	24.3
60	152	235	3584	21.9	22.5	22.2
55	140	232	3301	20.0	20.6	20.3
50	127	229	2995	18.0	18.6	18.3
45	114	225	2688	16.1	16.6	16.4
40	102	221	2405	14.3	14.7	14.5
35	89	216	2099	12.5	12.9	12.7
30	76	210	1792	10.7	11.0	10.8
25	64	204	1509	9.1	9.3	9.2
20	51	195	1203	7.3	7.5	7.4
15	38	184	896	5.6	5.7	5.6
10	25	169	590	4.0	4.1	4.0
9	24	168	566	3.8	3.9	3.8

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B31Y08GB EAN: 4058352909898	LP number 59065_1290
--	--	--------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	5990.0	39.8
5.0	5990.0	39.4
15.0	5990.0	39.5