


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, wide distribution (ST1.0a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 80 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 9850 lm Power consumption = 72.5 W Luminous efficacy = 135.9 lm/W	serial documentation 09.08.2023

Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 489 cd/klm**

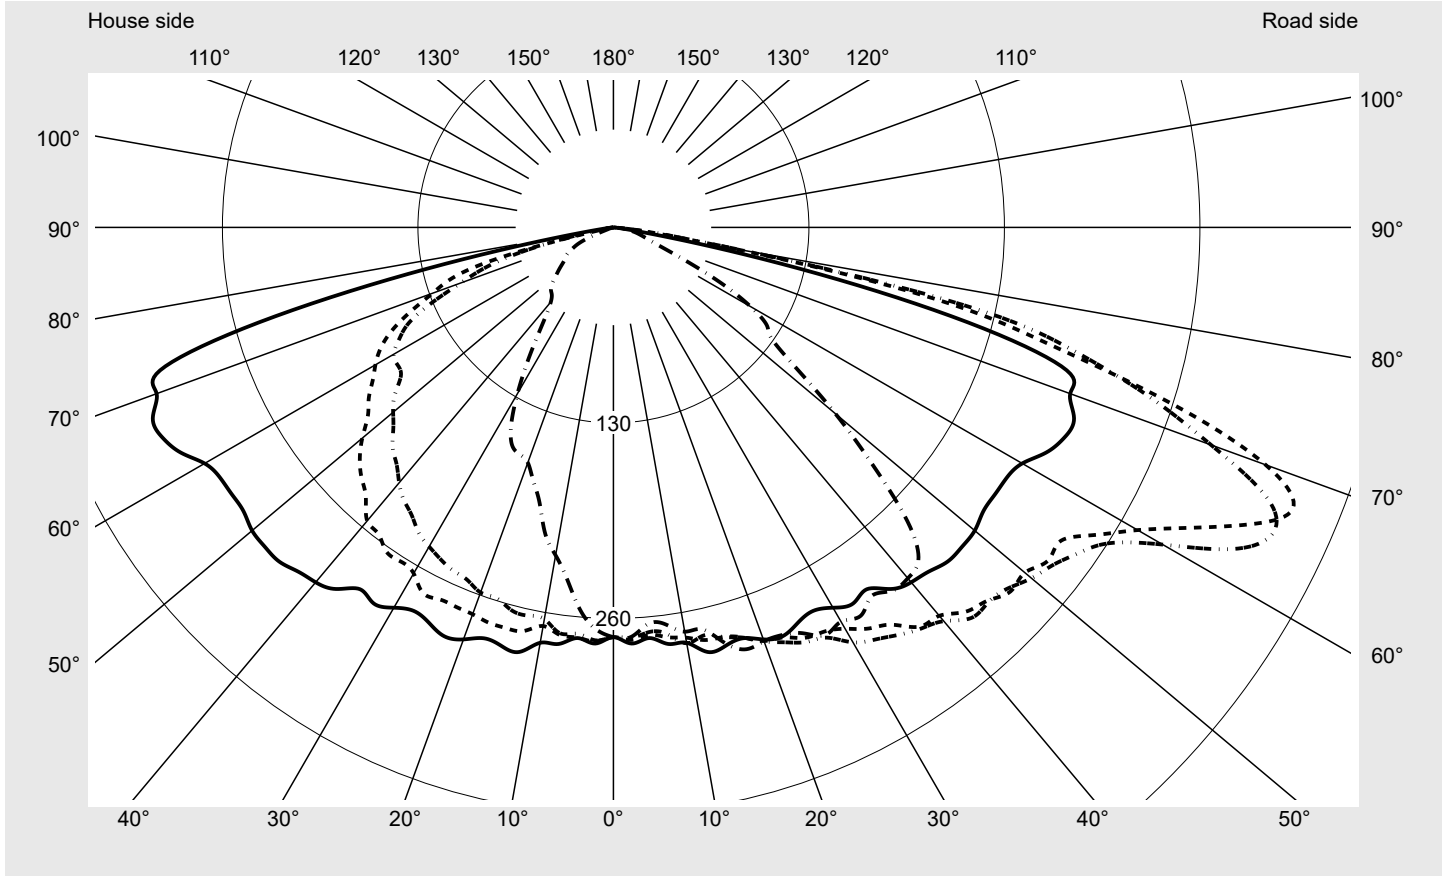

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	461.5
Imax 80°	96.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
--	--	-------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

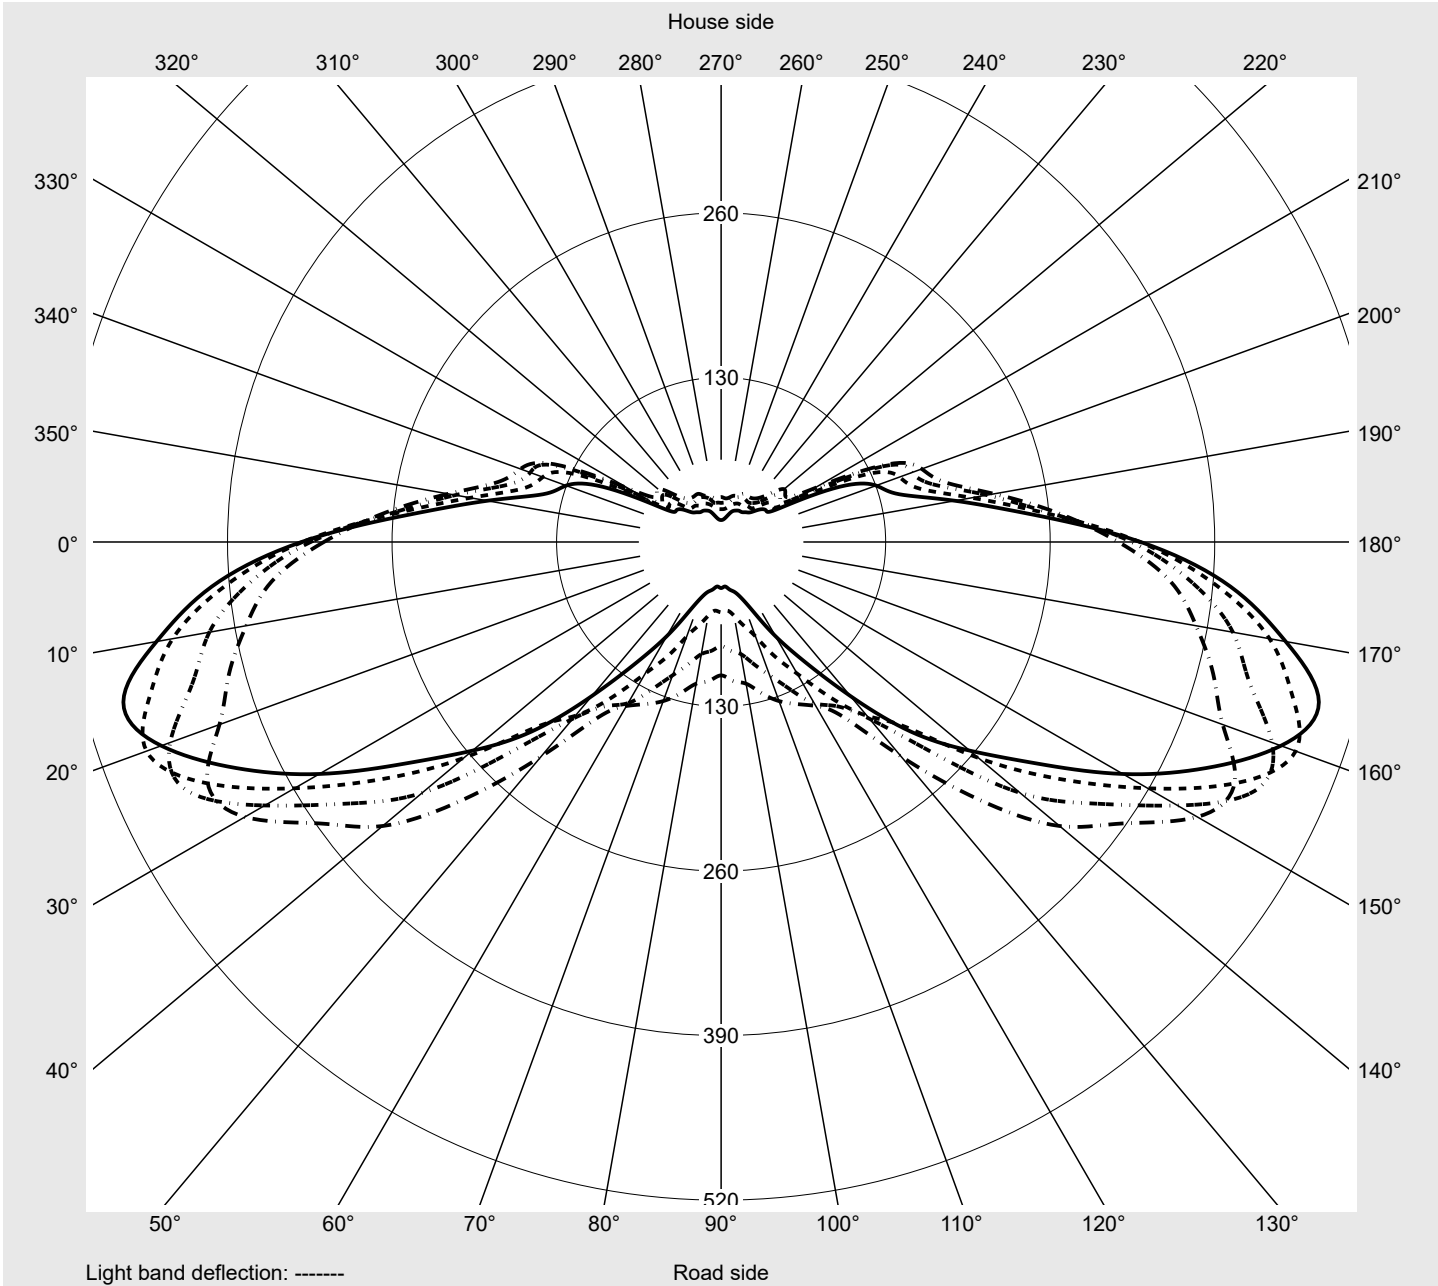

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
---	--	--------------------------------------

siteco

Table of values for luminous intensities		Maximum luminous intensity											
C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	277.0	276.4	275.2	274.5	273.0	273.7	272.9	273.0	271.2	271.2	271.1	271.2	271.4
5,0°	274.1	274.0	274.4	271.9	270.1	269.9	268.3	270.2	270.2	270.8	270.6	270.2	268.6
7,5°	279.4	277.3	274.8	274.9	272.6	273.0	273.3	271.7	269.4	269.4	269.0	268.1	269.4
10,0°	280.5	276.6	274.8	277.0	280.8	278.6	272.2	269.6	269.1	273.3	273.9	275.3	275.6
12,5°	289.2	286.8	282.7	281.0	277.9	277.4	280.6	282.2	279.8	279.6	278.5	279.4	279.1
15,0°	288.1	289.0	288.6	282.0	281.9	284.6	284.1	287.9	291.2	290.4	290.4	287.4	286.6
17,5°	286.5	287.8	285.5	285.9	286.0	290.2	291.3	295.8	292.3	291.9	293.7	291.6	289.1
20,0°	291.5	292.4	288.6	292.7	293.0	298.5	297.4	298.5	297.9	297.2	297.4	296.1	295.5
22,5°	294.2	287.4	289.6	295.1	298.6	301.7	301.5	304.4	301.6	303.0	304.1	302.2	302.9
25,0°	290.1	291.1	297.6	301.1	304.1	306.9	304.1	310.9	311.8	314.8	310.7	306.6	305.0
27,5°	287.5	292.3	300.5	303.1	307.5	314.6	310.4	317.0	314.8	313.0	306.9	305.5	309.4
30,0°	292.0	294.2	306.8	308.2	318.6	321.3	321.7	325.9	317.9	312.7	313.6	314.2	314.2
32,5°	296.6	303.4	310.5	316.2	324.8	328.0	325.1	324.3	321.7	320.6	319.3	318.8	318.9
35,0°	293.7	307.9	314.0	322.5	330.7	330.2	333.2	331.9	324.2	323.3	323.9	327.2	329.1
37,5°	303.1	313.9	324.1	334.6	336.2	339.9	336.6	332.6	330.2	336.0	331.7	335.5	336.0
40,0°	308.1	323.2	333.3	337.1	341.8	344.1	345.3	335.2	345.8	340.1	337.1	341.4	336.8
42,5°	310.4	331.9	338.8	346.6	352.2	343.4	360.7	346.8	357.8	348.2	345.1	344.2	337.4
45,0°	314.3	336.1	345.1	351.3	352.5	350.5	355.5	355.4	363.9	365.9	352.7	349.6	341.3
47,5°	314.4	339.7	350.1	358.2	355.5	358.5	354.9	364.8	369.6	371.3	360.1	351.7	330.9
50,0°	313.6	338.4	355.7	357.1	362.9	365.7	359.9	376.6	390.1	379.0	360.1	337.0	305.4
52,5°	310.1	339.8	351.2	364.1	368.6	376.4	380.3	400.7	411.0	378.8	346.4	308.8	268.0
55,0°	309.7	336.3	357.1	363.3	377.6	395.3	407.2	415.4	395.9	359.4	318.0	267.3	223.8
57,5°	310.0	338.2	361.6	380.5	390.8	408.7	436.4	415.4	373.0	331.3	278.8	218.4	176.1
60,0°	313.9	356.4	381.1	402.5	421.8	447.8	434.4	387.7	349.1	287.7	221.2	169.0	149.6
62,5°	324.3	374.3	410.6	432.6	463.2	465.3	416.3	360.4	308.4	234.2	182.3	158.2	147.0
65,0°	330.8	392.8	440.0	467.1	483.1	450.2	389.2	326.5	265.4	207.0	179.3	149.5	120.1
67,5°	331.5	403.9	453.0	489.0	470.7	422.7	366.6	305.3	256.5	211.8	158.8	115.9	86.0
70,0°	323.2	394.9	447.7	461.5	422.9	385.2	351.0	344.3	283.9	188.9	118.3	74.2	48.5
72,5°	316.1	359.3	401.7	388.4	373.1	363.3	394.6	409.8	286.0	144.6	69.3	39.5	28.1
75,0°	244.1	257.5	289.2	299.7	316.8	366.8	438.0	374.9	196.5	72.3	32.2	23.3	21.1
77,5°	127.1	147.2	181.9	217.4	238.2	288.7	316.5	219.1	70.5	28.0	20.6	17.9	17.0
80,0°	33.5	53.0	71.3	80.0	84.1	96.1	90.3	66.5	20.1	17.3	16.8	12.6	12.6
82,5°	6.2	9.7	17.5	24.9	29.9	37.4	35.4	17.1	10.8	10.9	11.3	8.2	8.1
85,0°	1.2	1.4	2.0	2.7	3.3	4.8	5.6	4.1	4.1	4.6	5.2	4.0	3.9
87,5°	0.3	0.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1	1.2	1.5	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	271.5	272.2	271.7	270.4	271.3	272.5	277.7	275.7	275.6	274.8	274.5	271.8	269.8
5,0°	268.1	267.6	267.2	266.5	266.4	264.7	276.0	275.8	273.8	271.3	270.7	265.9	261.6
7,5°	270.3	271.6	268.7	269.2	266.8	266.3	278.8	275.9	273.3	272.2	266.5	262.4	258.5
10,0°	279.4	277.9	273.7	272.9	271.2	273.0	280.7	276.5	269.2	264.4	259.9	255.3	249.5
12,5°	278.6	280.8	279.4	279.3	278.5	273.8	288.2	284.0	274.9	264.3	256.9	253.0	246.5
15,0°	285.1	284.0	283.9	287.7	288.0	286.1	289.0	286.8	275.9	263.3	253.3	246.3	239.9
17,5°	290.0	288.1	290.0	288.8	291.7	294.1	287.2	284.3	275.6	258.5	253.6	241.8	228.9
20,0°	293.4	292.3	296.4	290.0	290.0	292.8	293.7	285.3	273.7	258.3	246.8	237.9	222.9
22,5°	298.9	295.2	298.5	293.0	293.5	293.4	291.1	289.6	273.2	253.8	240.0	225.4	215.1
25,0°	303.5	300.9	298.5	297.3	296.1	297.7	289.2	283.4	273.0	251.9	234.0	219.6	206.1
27,5°	304.9	305.2	302.5	301.1	299.3	305.5	291.3	285.0	274.1	248.8	231.4	212.9	194.9
30,0°	312.7	305.3	305.5	302.9	307.6	302.7	288.7	284.3	265.7	245.1	225.0	207.3	188.4
32,5°	319.2	313.3	310.5	312.2	306.2	306.2	283.1	279.6	263.4	240.9	219.4	196.1	184.6
35,0°	323.5	319.3	312.4	309.8	305.1	299.3	286.6	274.8	263.2	233.8	209.8	191.2	183.1
37,5°	329.9	320.0	318.1	311.8	303.1	304.5	285.3	273.8	256.8	228.8	203.4	183.6	178.0
40,0°	326.8	319.2	316.0	314.5	307.7	304.6	283.4	268.2	254.7	221.7	195.2	181.8	177.4
42,5°	328.9	324.7	313.0	313.8	302.9	300.2	281.7	262.2	243.7	213.5	188.7	181.1	170.7
45,0°	329.9	314.5	297.4	287.6	275.9	276.6	282.8	256.2	236.6	207.6	182.1	178.0	160.5
47,5°	308.8	280.5	261.8	246.2	234.1	234.1	281.8	246.6	228.8	198.6	177.3	171.6	143.5
50,0°	269.9	239.9	221.1	206.5	191.4	192.8	272.7	241.8	218.0	191.2	173.4	161.4	125.2
52,5°	227.6	201.2	180.4	164.6	155.8	152.3	269.6	232.4	205.8	183.3	167.5	141.2	105.0
55,0°	184.5	161.5	142.3	135.6	131.5	128.0	268.2	229.8	198.7	172.6	162.6	121.1	89.1
57,5°	150.6	141.1	134.8	129.7	120.0	120.9	267.6	224.3	189.9	170.2	151.9	105.1	75.3
60,0°	141.3	133.7	123.7	113.7	110.2	105.4	266.2	219.0	182.8	168.7	145.2	84.3	62.4
62,5°	128.2	112.1	99.9	90.0	86.2	82.4	261.4	213.3	174.7	160.5	141.7	72.1	56.8
65,0°	99.2	79.4	68.2	59.3	54.4	55.5	258.5	201.1	162.6	150.0	126.5	62.8	50.1
67,5°	61.3	47.3	40.9	38.1	35.3	36.4	247.6	187.6	145.7	130.3	103.1	53.3	43.3
70,0°	35.3	31.8	30.3	27.9	27.8	26.8	240.7	174.2	128.1	108.1	85.0	47.0	35.7
72,5°	25.9	25.3	24.5	22.6	23.1	21.7	230.1	158.9	112.6	89.8	64.6	36.7	31.7
75,0°	20.7	20.5	19.8	18.7	18.3	18.0	194.3	130.2	78.9	63.6	43.0	28.7	26.2
77,5°	16.6	16.2	15.3	14.6	14.3	14.6	118.7	58.0	20.8	29.3	25.7	17.5	17.8
80,0°	11.9	12.1	11.0	10.7	10.4	10.4	32.3	9.7	6.1	12.2	12.9	9.1	9.1
82,5°	8.0	7.6	7.6	7.4	6.9	6.2	5.0	2.7	2.9	3.9	4.1	3.0	1.6
85,0°	3.7	4.1	4.1	3.7	3.3	3.0	1.2	1.0	1.0	0.7	0.6	0.5	0.2
87,5°	1.1	1.3	1.2	1.1	1.0	1.0	0.3	0.2	0.2	0.2	0.1	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	0.4	0.4
2,5°	268.5	268.9	268.2	267.9	268.1	267.2	267.4	267.3	267.8	267.2	267.4	3.2	3.7
5,0°	258.3	254.5	252.2	250.1	250.6	249.2	250.4	252.1	254.6	253.9	255.1	6.3	10.0
7,5°	253.2	249.6	246.9	243.4	241.8	240.1	238.5	238.0	237.2	236.5	235.9	9.4	19.4
10,0°	246.6	241.3	236.8	232.4	231.2	227.8	225.6	222.2	220.8	221.0	221.4	12.4	31.8
12,5°	242.7	233.6	227.3	222.1	217.3	215.3	212.9	212.5	209.4	207.8	209.0	15.4	47.2
15,0°	233.0	224.6	215.3	210.9	206.2	200.4	196.3	196.0	195.2	190.0	189.7	18.4	65.6
17,5°	223.4	215.6	205.0	198.1	192.0	188.0	182.3	180.3	179.7	177.1	177.0	21.1	86.7
20,0°	214.7	202.7	194.1	186.2	181.6	179.9	175.0	171.4	172.3	169.2	166.4	23.9	110.6
22,5°	204.1	193.6	184.4	178.0	171.6	170.7	170.7	168.1	164.5	164.2	163.2	26.7	137.3
25,0°	189.5	182.2	178.9	173.9	167.7	164.7	164.2	162.4	163.3	162.0	159.6	29.4	166.7
27,5°	186.1	181.6	171.6	167.3	164.1	158.7	157.7	154.0	150.5	149.0	147.0	32.0	198.7
30,0°	181.3	178.3	168.4	164.0	159.7	154.5	144.9	141.4	133.3	128.4	127.6	34.5	233.3
32,5°	177.7	168.8	163.3	159.4	151.2	146.4	135.1	123.5	114.9	107.7	107.0	36.9	270.1
35,0°	178.3	165.2	156.5	148.1	142.4	131.6	119.3	106.1	96.7	90.9	87.8	39.0	309.1
37,5°	171.2	159.1	148.6	141.6	129.9	113.6	100.4	89.5	80.3	75.0	73.4	41.2	350.3
40,0°	161.1	148.6	139.0	131.3	114.8	96.2	81.8	73.1	68.4	65.6	64.8	43.1	393.4
42,5°	151.2	140.3	126.0	117.4	100.5	81.3	70.4	66.6	62.3	61.2	60.6	45.0	438.4
45,0°	137.4	125.8	116.7	102.3	84.9	69.6	62.1	58.5	57.5	58.4	58.8	46.2	484.6
47,5°	122.6	111.6	104.9	87.4	70.5	62.3	56.9	55.3	55.3	54.1	55.2	46.5	531.1
50,0°	105.9	101.5	94.5	74.3	62.2	56.1	53.6	51.7	51.0	50.8	49.9	46.3	577.4
52,5°	92.1	89.6	74.0	62.8	54.7	52.6	50.1	48.1	46.4	46.3	45.2	45.6	623.0
55,0°	80.1	75.2	59.7	53.1	49.2	47.3	46.2	43.5	42.4	41.7	40.8	44.6	667.6
57,5°	72.2	65.6	52.2	46.3	45.2	44.5	42.2	40.0	38.3	37.8	37.8	43.9	711.6
60,0°	64.9	53.5	45.3	42.3	42.0	42.0	39.0	37.8	35.5	34.7	35.5	43.4	755.0
62,5°	58.2	46.5	40.2	38.0	38.7	38.9	37.6	35.3	31.6	31.2	30.9	42.7	797.7
65,0°	48.5	38.6	35.4	35.0	33.2	33.2	32.2	30.1	27.6	26.1	25.9	41.1	838.8
67,5°	40.0	33.3	30.7	28.8	28.4	27.4	25.8	22.4	19.4	17.8	17.3	38.7	877.5
70,0°	33.9	28.1	26.6	25.0	23.5	19.0	16.2	11.9	9.1	7.5	6.5	36.0	913.6
72,5°	26.8	22.8	22.0	19.8	14.7	10.1	6.8	4.3	3.5	3.1	3.2	33.2	946.7
75,0°	21.1	16.5	14.5	11.7	7.0	3.9	2.7	1.7	1.5	1.6	1.9	27.1	973.8
77,5°	13.6	9.9	6.4	3.8	2.2	1.3	1.2	0.7	0.6	0.8	1.1	17.1	991.0
80,0°	5.6	2.8	1.3	0.3	0.4	0.2	0.2	0.3	0.2	0.3	0.5	6.1	997.1
82,5°	0.8	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.1	2.2	999.3
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
Dimming levels table		siteco
environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9850	72.5	75.7	74.1
95	241	252	9346	67.9	70.8	69.4
90	229	250	8881	63.8	66.5	65.2
85	216	248	8376	59.4	61.9	60.6
80	203	246	7872	55.2	57.5	56.4
75	190	243	7368	51.1	53.2	52.2
70	178	241	6903	47.4	49.4	48.4
65	165	238	6399	43.5	45.2	44.4
60	152	235	5894	39.7	41.2	40.4
55	140	232	5429	36.3	37.7	37.0
50	127	229	4925	32.7	33.9	33.3
45	114	225	4421	29.2	30.3	29.8
40	102	221	3956	26.0	26.9	26.4
35	89	216	3451	22.6	23.5	23.0
30	76	210	2947	19.4	20.1	19.8
25	63	203	2443	16.3	16.9	16.6
20	51	195	1978	13.4	13.9	13.6
15	38	184	1474	10.4	10.7	10.6
10	25	169	969	7.1	7.4	7.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9850	71.2	73.0	72.1
95	241	252	9346	66.9	68.5	67.7
90	229	250	8881	62.8	64.4	63.6
85	216	248	8377	58.7	60.2	59.4
80	203	246	7872	54.6	55.9	55.2
75	190	243	7368	50.6	51.9	51.2
70	178	241	6903	47.0	48.2	47.6
65	165	238	6399	43.2	44.3	43.8
60	152	235	5895	39.5	40.5	40.0
55	140	232	5429	36.2	37.0	36.6
50	127	229	4925	32.6	33.3	33.0
45	114	225	4421	29.1	29.8	29.4
40	102	221	3956	26.0	26.6	26.3
35	89	216	3451	22.7	23.2	23.0
30	76	210	2947	19.5	19.9	19.7
25	63	203	2443	16.3	16.6	16.5
20	51	195	1978	13.5	13.7	13.6
15	38	184	1474	10.4	10.6	10.5
10	25	169	970	7.2	7.3	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9850	71.7	74.8	73.2
95	241	252	9346	67.3	70.1	68.7
90	229	250	8881	63.2	65.8	64.5
85	216	248	8377	59.0	61.4	60.2
80	203	246	7873	54.8	57.0	55.9
75	190	243	7368	50.8	52.8	51.8
70	178	241	6903	47.1	49.0	48.0
65	165	238	6399	43.3	45.1	44.2
60	152	235	5895	39.5	41.1	40.3
55	140	232	5429	36.2	37.6	36.9
50	127	229	4925	32.6	33.8	33.2
45	114	225	4421	29.1	30.2	29.6
40	102	221	3956	25.9	26.9	26.4
35	89	216	3452	22.6	23.5	23.0
30	76	210	2947	19.4	20.1	19.8
25	63	203	2443	16.3	16.8	16.6
20	51	195	1978	13.4	13.9	13.6
15	38	184	1474	10.4	10.7	10.6
10	25	169	970	7.1	7.3	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D51Y08JB EAN: 4058352923481	LP number 59078_232
--	--	--------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	9850.0	72.5
5.0	9850.0	71.2
15.0	9850.0	71.7