


Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E1K1A EAN: 4058352853399	LP number 59305_12
	Version mounting bracket Optic symmetric distribution RS7 Cover toughened safety glass Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 22320 lm Power consumption = 208.1 W Luminous efficacy = 107.3 lm/W	serial documentation 22.08.2023





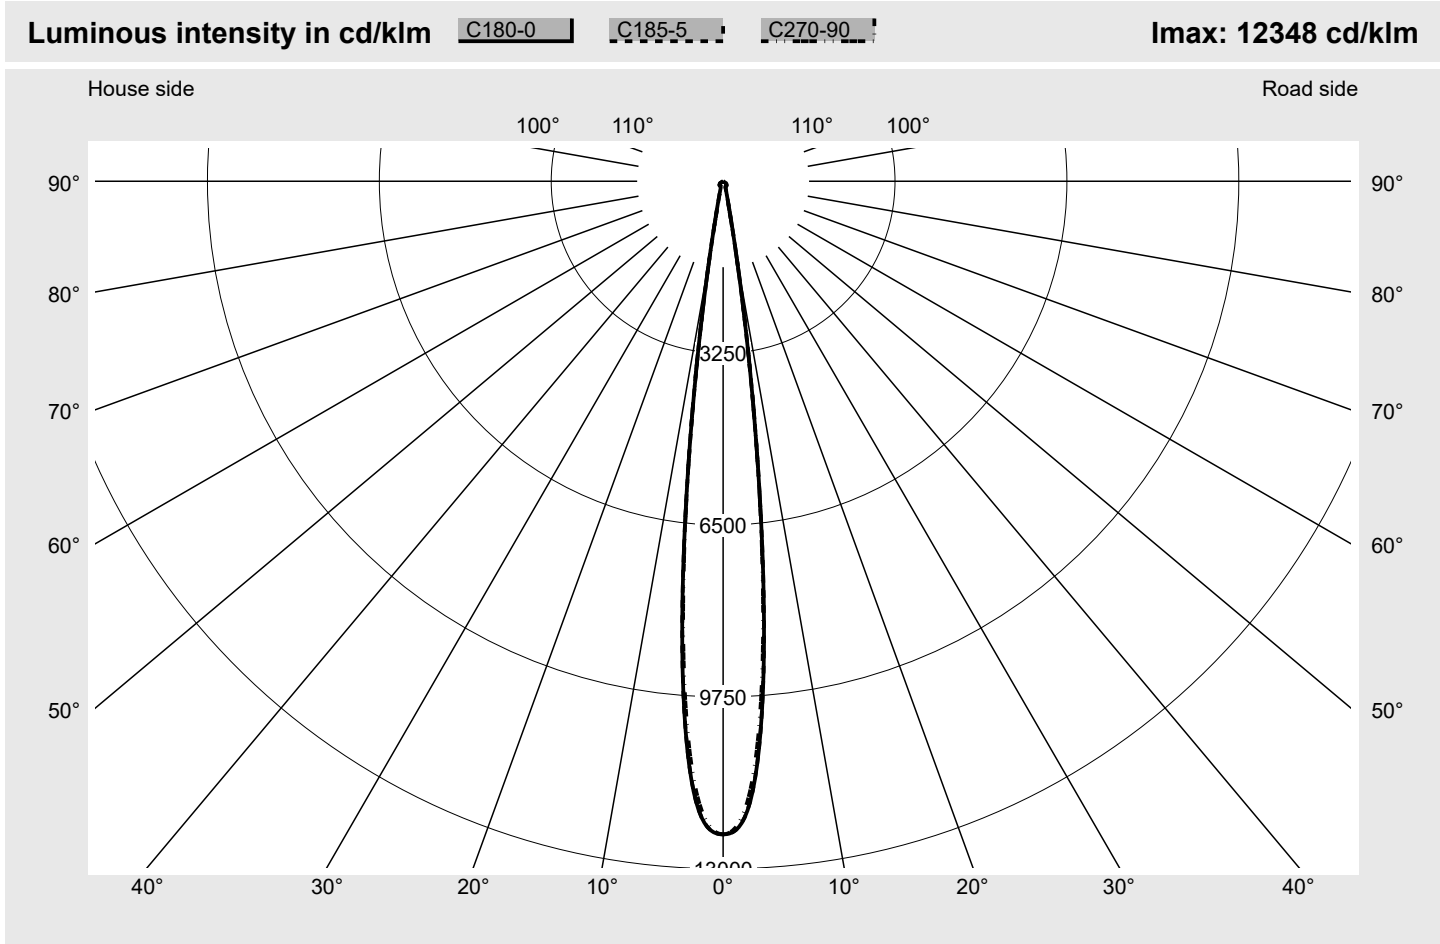


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	33.3
Imax 80°	10.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E1K1A EAN: 4058352853399	LP number 59305_12
--	--	-------------------------------------

Envelope curve in cd/klm **KMK 0°** **sitEco**

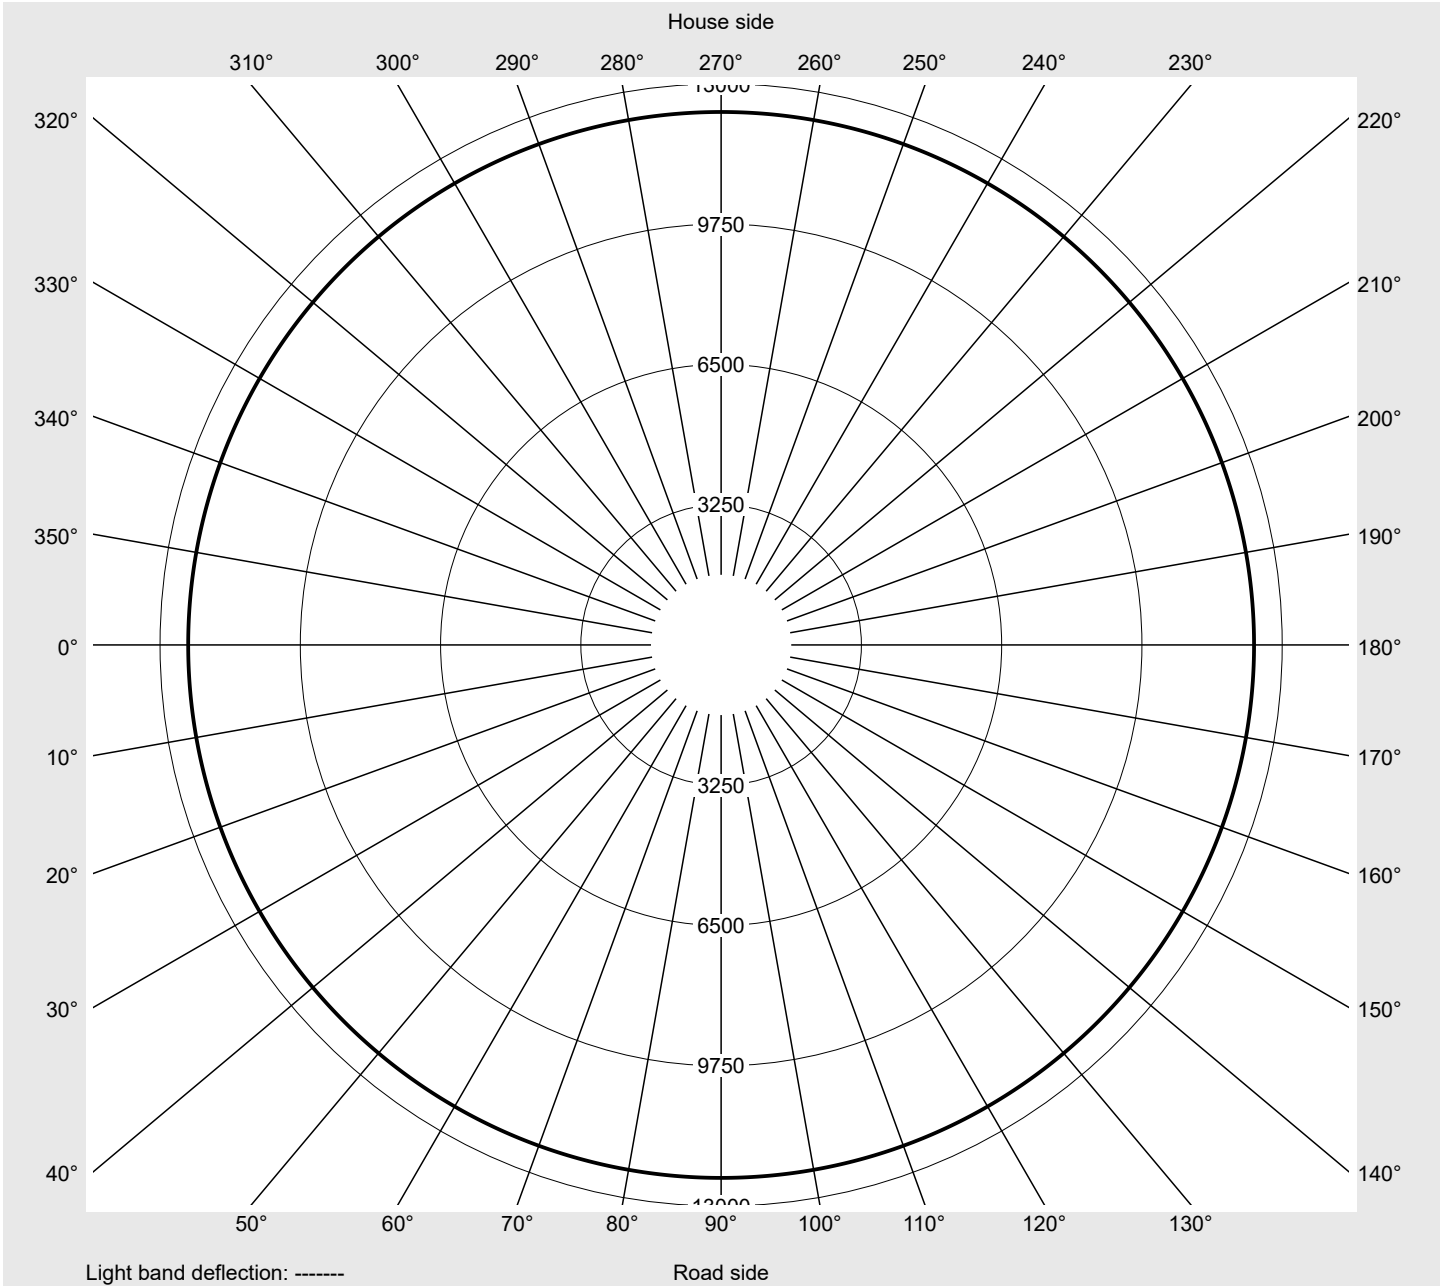

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E1K1A EAN: 4058352853399	LP number 59305_12
---------------------------------------	--	------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1
2,5°	11740.3	11736.4	11732.4	11728.5	11741.1	11753.7	11766.3	11748.6	11730.9	11713.2
5,0°	8862.5	8858.5	8854.4	8850.4	8960.8	9071.1	9181.5	9162.5	9143.5	9124.5
7,5°	4523.8	4521.3	4518.8	4516.3	4592.9	4669.4	4745.9	4754.6	4763.3	4771.9
10,0°	1521.6	1523.6	1525.5	1527.4	1539.1	1550.7	1562.3	1563.7	1565.2	1566.7
12,5°	537.5	527.2	516.9	506.6	509.7	512.9	516.0	503.2	490.5	477.7
15,0°	276.8	276.2	275.7	275.1	276.5	277.9	279.3	278.0	276.8	275.5
17,5°	185.9	185.4	185.0	184.5	185.1	185.7	186.2	185.7	185.2	184.7
20,0°	134.4	134.2	134.1	134.0	134.7	135.3	136.0	135.8	135.6	135.4
22,5°	118.4	118.3	118.2	118.2	118.5	118.9	119.3	119.6	119.9	120.2
25,0°	109.6	109.3	109.1	108.8	108.9	109.0	109.1	109.4	109.8	110.1
27,5°	104.3	104.0	103.7	103.4	103.2	103.0	102.9	103.0	103.2	103.4
30,0°	100.4	100.2	100.0	99.8	99.5	99.2	98.8	98.8	98.8	98.8
32,5°	99.1	98.7	98.4	98.0	97.7	97.4	97.1	96.9	96.7	96.6
35,0°	102.2	101.9	101.6	101.3	101.1	100.9	100.7	100.5	100.3	100.1
37,5°	105.3	105.0	104.7	104.4	104.6	104.8	104.9	105.0	105.0	105.1
40,0°	102.9	102.4	102.0	101.6	102.2	102.8	103.4	103.6	103.8	104.0
42,5°	99.8	99.0	98.2	97.3	98.1	98.8	99.6	99.9	100.1	100.4
45,0°	96.2	95.3	94.3	93.3	94.0	94.7	95.4	95.9	96.3	96.7
47,5°	90.7	89.6	88.5	87.5	88.3	89.1	89.9	90.4	90.9	91.4
50,0°	85.0	83.5	82.0	80.5	81.6	82.7	83.8	84.3	84.9	85.4
52,5°	79.1	77.5	75.8	74.1	75.4	76.6	77.9	78.3	78.6	79.0
55,0°	72.8	71.3	69.8	68.4	69.7	71.0	72.3	72.7	73.1	73.4
57,5°	66.1	64.6	63.1	61.6	63.0	64.4	65.8	66.1	66.5	66.8
60,0°	59.6	57.9	56.1	54.3	55.5	56.7	57.9	58.5	59.1	59.7
62,5°	52.9	51.3	49.6	48.0	48.8	49.6	50.4	51.3	52.2	53.0
65,0°	45.4	44.2	43.0	41.8	42.6	43.3	44.1	44.7	45.3	45.9
67,5°	38.3	37.5	36.8	36.0	36.7	37.5	38.2	38.7	39.2	39.6
70,0°	31.9	31.3	30.8	30.3	31.0	31.7	32.4	32.7	33.0	33.3
72,5°	25.9	25.6	25.3	25.0	25.5	26.0	26.5	26.7	26.9	27.1
75,0°	20.9	20.5	20.1	19.6	20.0	20.4	20.8	20.9	21.0	21.1
77,5°	15.9	15.4	14.9	14.5	14.8	15.1	15.4	15.4	15.5	15.6
80,0°	10.4	10.2	9.9	9.7	9.9	10.0	10.1	10.1	10.0	9.9
82,5°	5.7	5.6	5.5	5.4	5.5	5.5	5.6	5.5	5.4	5.4
85,0°	2.4	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.1	2.1
87,5°	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E1K1A EAN: 4058352853399	LP number 59305_12
Table of values for luminous intensities		Maximum luminous intensity



C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone
	130°	125°	120°	115°	110°	105°	100°	95°			
	230°	235°	240°	245°	250°	255°	260°	265°	270°		
	310°	305°	300°	295°	290°	285°	280°	275°			
γ	Luminous intensity in cd/klm									Luminous flux in lm/klm	
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	18.5	18.5
2,5°	11704.4	11695.7	11686.9	11645.2	11603.6	11561.9	11563.0	11564.1	11565.1	139.7	158.2
5,0°	9110.0	9095.6	9081.1	8940.8	8800.6	8660.3	8659.8	8659.4	8658.9	213.7	371.9
7,5°	4772.8	4773.6	4774.4	4699.1	4623.7	4548.4	4547.8	4547.2	4546.6	166.3	538.2
10,0°	1560.2	1553.8	1547.4	1523.7	1500.0	1476.3	1480.8	1485.4	1490.0	72.9	611.1
12,5°	479.8	481.9	484.0	474.2	464.5	454.7	460.6	466.5	472.4	29.1	640.2
15,0°	275.0	274.5	274.0	272.5	271.0	269.5	269.7	270.0	270.3	19.5	659.7
17,5°	184.6	184.6	184.5	183.4	182.3	181.2	181.7	182.1	182.6	15.2	674.8
20,0°	136.0	136.6	137.2	136.7	136.3	135.8	136.1	136.4	136.7	12.7	687.6
22,5°	120.6	121.0	121.3	121.0	120.7	120.4	120.4	120.5	120.6	12.6	700.1
25,0°	110.3	110.5	110.7	110.6	110.5	110.4	110.4	110.4	110.5	12.7	712.9
27,5°	103.5	103.5	103.6	103.7	103.7	103.8	103.9	103.9	104.0	13.1	726.0
30,0°	98.9	99.0	99.0	99.2	99.4	99.6	99.5	99.4	99.3	13.6	739.6
32,5°	96.5	96.5	96.5	96.5	96.6	96.6	96.7	96.9	97.0	14.3	753.9
35,0°	99.9	99.8	99.7	99.7	99.7	99.7	99.9	100.0	100.2	15.8	769.7
37,5°	104.9	104.6	104.4	104.2	104.1	103.9	104.1	104.3	104.5	17.5	787.1
40,0°	103.6	103.3	102.9	102.3	101.7	101.1	101.5	101.9	102.3	18.1	805.2
42,5°	100.0	99.6	99.2	98.5	97.9	97.2	98.0	98.8	99.6	18.3	823.5
45,0°	96.2	95.7	95.2	94.7	94.1	93.6	94.4	95.1	95.9	18.4	842.0
47,5°	90.8	90.2	89.6	88.9	88.3	87.7	88.2	88.8	89.4	18.1	860.0
50,0°	84.6	83.7	82.8	82.0	81.2	80.4	81.2	81.9	82.6	17.4	877.4
52,5°	78.1	77.2	76.2	75.5	74.7	74.0	74.9	75.9	76.8	16.6	894.1
55,0°	72.4	71.4	70.4	69.8	69.2	68.6	68.9	69.2	69.5	15.9	909.9
57,5°	65.9	65.0	64.1	63.3	62.5	61.7	61.8	61.9	62.0	14.8	924.7
60,0°	58.7	57.6	56.5	55.7	54.9	54.1	54.3	54.6	54.9	13.4	938.2
62,5°	51.9	50.7	49.5	48.9	48.3	47.7	48.0	48.3	48.7	12.1	950.3
65,0°	45.0	44.1	43.2	42.6	42.0	41.3	41.7	42.1	42.6	10.8	961.1
67,5°	38.8	38.0	37.2	36.7	36.2	35.7	36.0	36.3	36.6	9.5	970.6
70,0°	32.7	32.2	31.6	31.2	30.7	30.2	30.5	30.8	31.1	8.1	978.7
72,5°	26.7	26.3	25.9	28.1	30.4	32.7	30.3	28.0	25.6	7.1	985.8
75,0°	20.8	20.6	20.3	20.1	19.8	19.6	18.9	18.3	17.6	5.3	991.1
77,5°	15.4	15.1	14.9	14.7	14.5	14.3	14.6	14.8	15.0	4.0	995.1
80,0°	9.9	9.8	9.8	9.7	9.6	9.5	9.6	9.7	9.8	2.7	997.8
82,5°	5.4	5.4	5.4	5.3	5.3	5.2	5.3	5.4	5.5	1.5	999.3
85,0°	2.1	2.2	2.2	2.1	2.1	2.1	2.1	2.2	2.2	0.6	999.9
87,5°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E1K1A EAN: 4058352853399	LP number 59305_12
---------------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	22320	208.1	227.1	217.6
95	241	252	21178	193.8	211.2	202.5
90	229	250	20123	181.2	197.5	189.4
85	216	248	18981	167.9	182.9	175.4
80	203	246	17838	155.2	168.9	162.0
75	190	243	16696	143.1	155.4	149.2
70	178	241	15642	132.2	143.6	137.9
65	165	238	14499	120.8	131.2	126.0
60	152	235	13357	110.0	119.2	114.6
55	140	232	12302	100.1	108.6	104.4
50	127	229	11160	89.9	97.4	93.6
45	114	225	10018	79.9	86.5	83.2
40	102	221	8963	70.8	76.8	73.8
35	89	216	7821	61.4	66.4	63.9
30	76	210	6678	52.2	56.4	54.3
25	63	203	5536	43.6	46.9	45.2
20	51	195	4482	35.9	38.5	37.2
15	38	184	3339	27.6	29.6	28.6
13	32	178	2812	23.9	25.5	24.7