




# Photometric test report

<b>Family</b> <b>Floodlight FL21 midi</b>	<b>Order number: 5XA7782F4B1A</b> <b>EAN: 4058352854662</b>	<b>LP number</b> <b>59238_95</b>
	<b>Version</b> mounting bracket <b>Optic</b> symmetric distribution RS12 <b>Cover</b> toughened safety glass <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 37160 lm Power consumption = 270.2 W Luminous efficacy = 137.5 lm/W	<b>serial documentation</b> <b>22.08.2023</b>
		



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

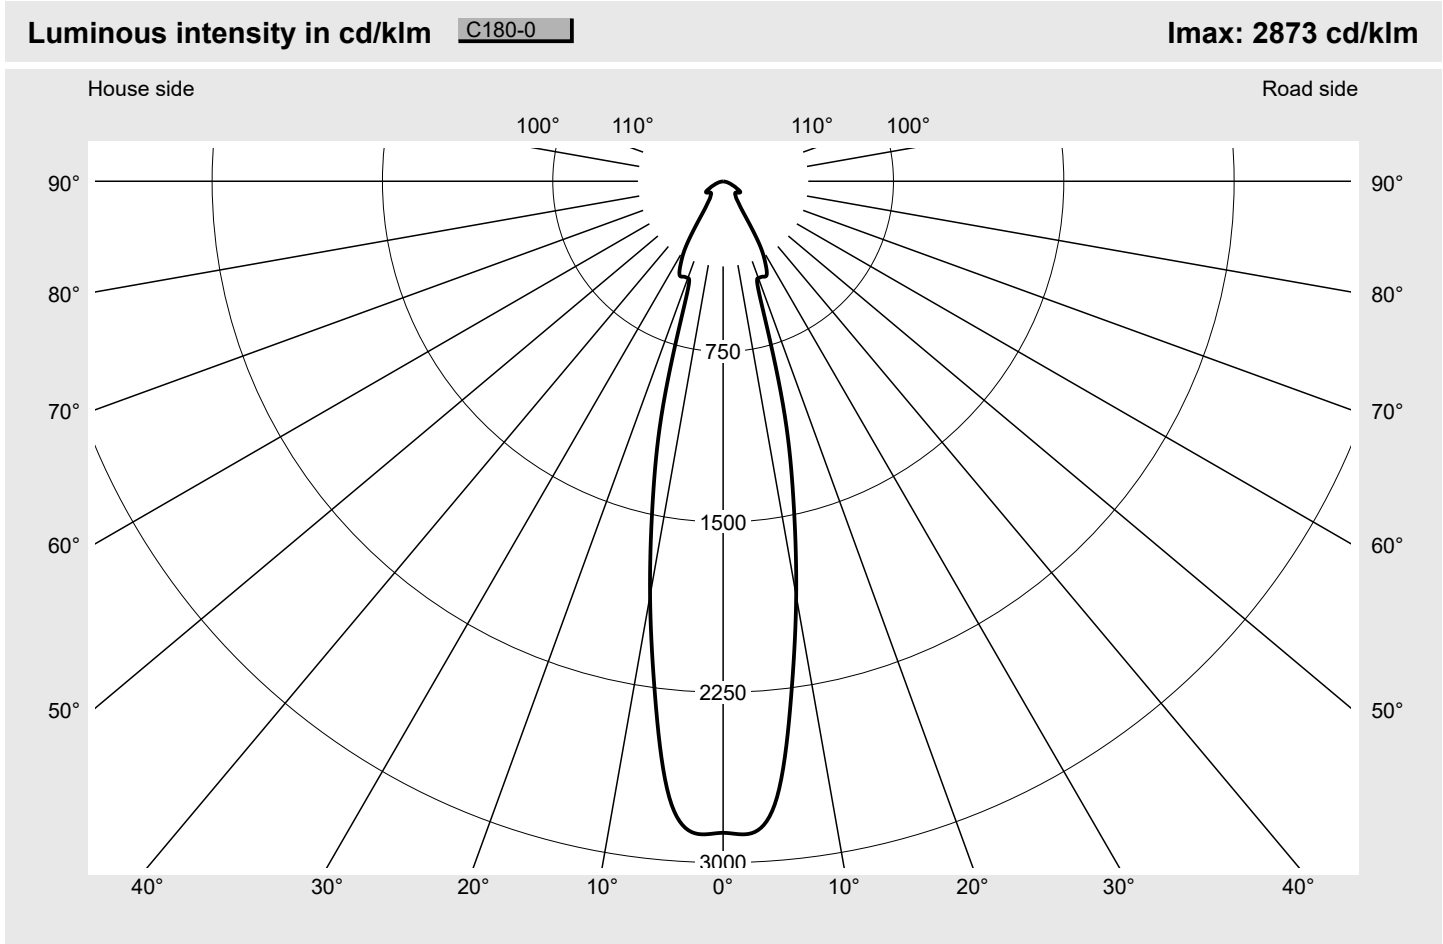Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032


**Photometric test report**

**Family**  
Floodlight FL21 midi

**Order number: 5XA7782F4B1A**  
**EAN: 4058352854662**

**LP number**  
59238\_95

**Envelope curve in cd/klm** KMK 2.5°  KMK 0°

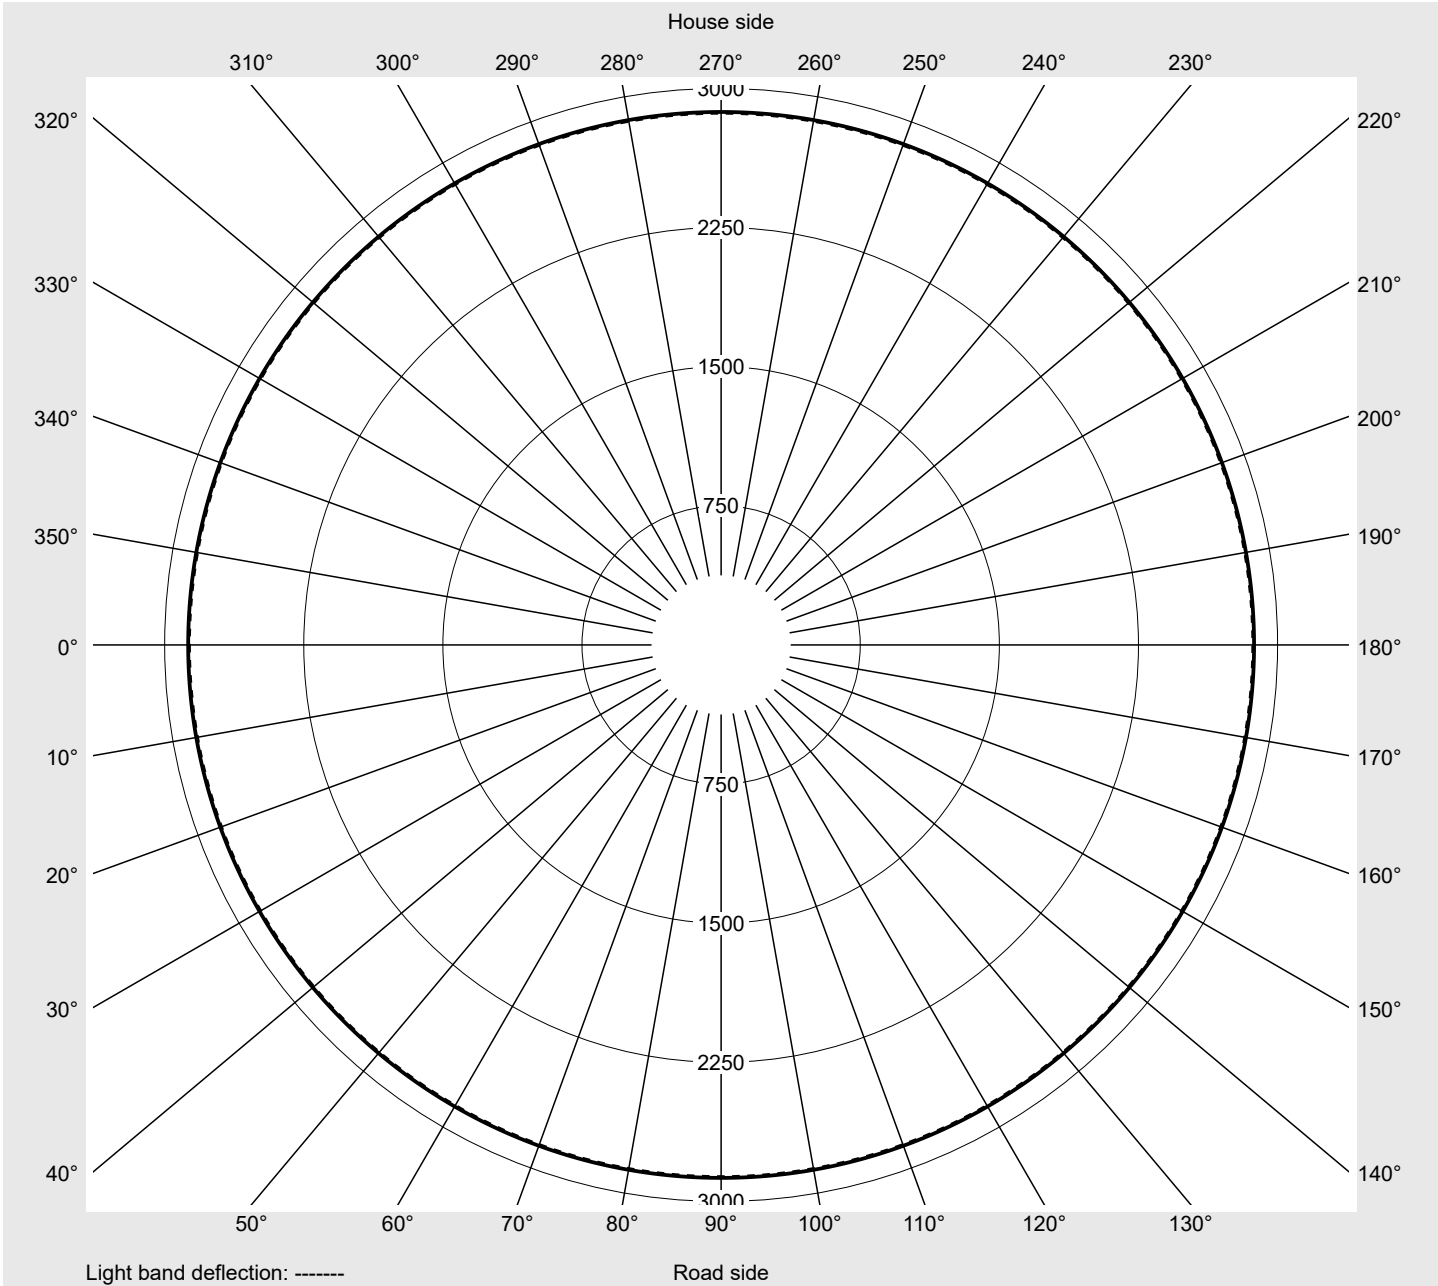

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782F4B1A</b> <b>EAN: 4058352854662</b>	<b>LP number</b> 59238_95
---------------------------------------	--	------------------------------

**sITeco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782F4B1A</b> <b>EAN: 4058352854662</b>	<b>LP number</b> <b>59238_95</b>
---------------------------------------	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	37160	270.2	286.6	278.4
95	241	252	35258	251.7	266.8	259.2
90	229	250	33503	235.4	249.4	242.4
85	216	248	31601	218.4	231.3	224.8
80	203	246	29699	202.1	214.0	208.0
75	190	243	27797	186.5	197.3	191.9
70	178	241	26041	172.6	182.5	177.6
65	165	238	24139	158.0	167.0	162.5
60	152	235	22237	143.8	152.0	147.9
55	140	232	20482	131.2	138.6	134.9
50	127	229	18580	117.7	124.4	121.0
45	114	225	16678	104.5	110.6	107.6
40	102	221	14923	92.7	97.9	95.3
35	89	216	13021	80.2	84.6	82.4
30	76	210	11119	68.1	71.8	69.9
25	63	203	9217	56.4	59.4	57.9
20	51	195	7461	45.9	48.3	47.1
15	38	184	5559	34.9	36.6	35.8
12	31	177	4535	29.0	30.4	29.7