
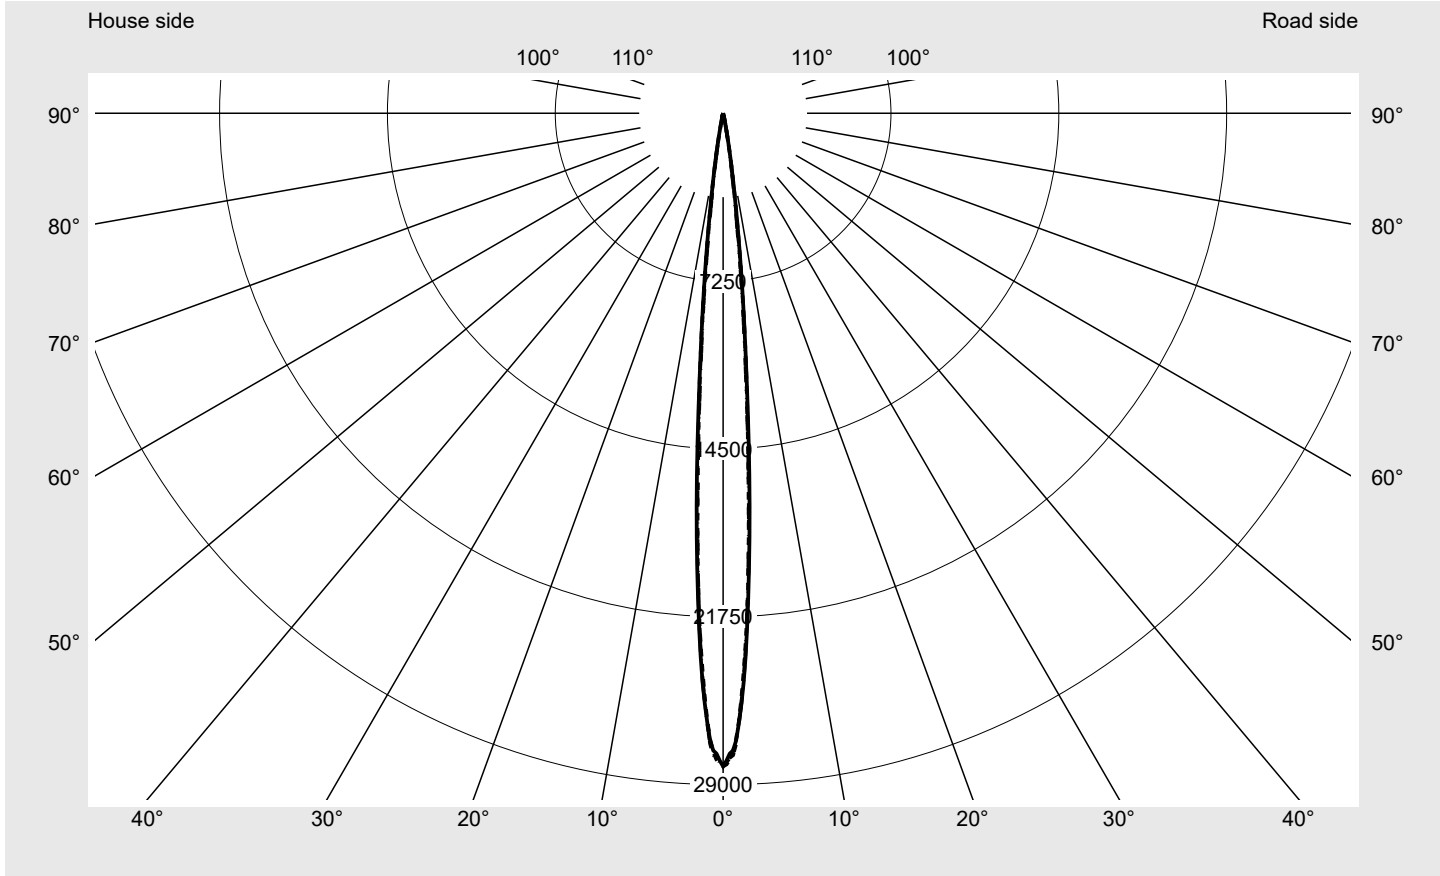


Photometric test report

Family Floodlight FL11 	Order number: 5XA779125Q01AA EAN: 4058352847435	LP number 59465_28
	Version standard bracket Optic symmetric distribution RS4 Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 173640 lm Power consumption = 1334.7 W Luminous efficacy = 130.1 lm/W	serial documentation 06.09.2023

Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 28210 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	14.0
Imax 80°	6.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779125Q01AA EAN: 4058352847435	LP number 59465_28
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 0°** **siteco**

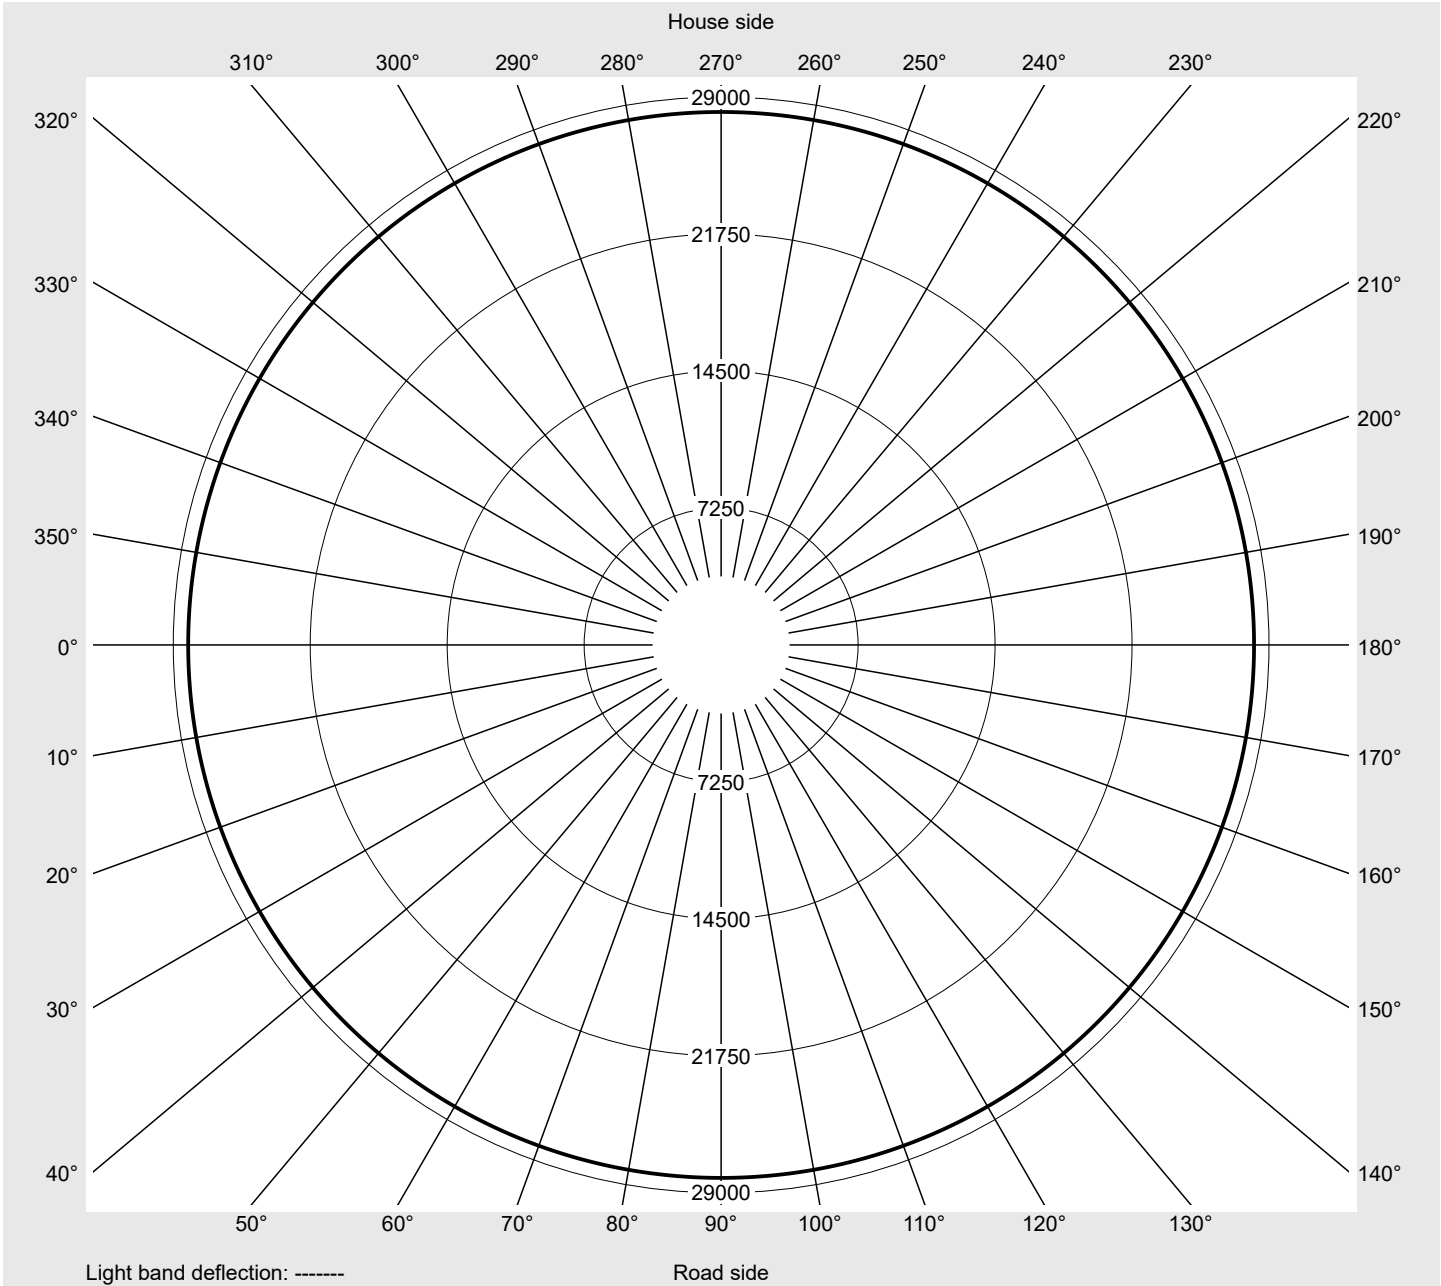

Photometric test report

Family Floodlight FL11	Order number: 5XA779125Q01AA EAN: 4058352847435	LP number 59465_28
----------------------------------	--	------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C- planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3
0,5°	27726.4	27992.9	27732.1	27998.7	27737.9	27998.7	27806.6	28024.5	27769.4	28041.7
1,0°	27422.6	27414.0	27448.4	27422.6	27457.0	27425.5	27474.2	27448.4	27497.1	27459.9
1,5°	26299.1	26233.2	26310.6	26230.3	26293.4	26233.2	26307.7	26247.5	26304.8	26241.8
2,0°	24825.9	24522.1	24828.8	24519.3	24814.5	24522.1	24817.3	24530.7	24820.2	24507.8
3,0°	20807.7	20566.9	20773.3	20544.0	20764.7	20532.6	20779.0	20509.6	20704.5	20446.6
4,0°	16330.9	15663.1	16276.4	15645.9	16276.4	15654.5	16279.3	15640.2	16219.1	15562.8
5,0°	11768.1	11581.8	11791.0	11587.5	11822.6	11636.3	11854.1	11639.1	11831.2	11587.5
6,0°	8292.1	8219.9	8314.2	8256.9	8373.5	8328.5	8438.6	8383.8	8459.2	8324.2
7,0°	5582.5	5471.9	5600.0	5524.1	5688.9	5639.0	5786.3	5693.7	5780.9	5655.3
8,0°	3591.2	3538.2	3625.9	3604.7	3746.5	3755.1	3895.3	3890.4	3964.4	3889.8
9,0°	2245.3	2224.9	2278.2	2284.3	2371.7	2403.5	2516.7	2564.6	2651.1	2631.9
10,0°	1313.2	1276.5	1338.2	1349.3	1427.9	1501.0	1557.7	1589.8	1666.3	1658.6
15,0°	153.9	151.5	153.7	151.9	156.5	156.8	163.2	163.9	170.4	168.4
20,0°	72.2	70.0	71.4	68.3	69.2	66.5	67.8	65.4	67.4	65.1
30,0°	34.1	34.1	34.1	33.8	33.0	33.3	33.6	33.3	33.1	33.0
45,0°	34.6	33.0	33.8	34.0	33.6	32.5	32.0	31.3	31.1	31.4
60,0°	22.8	23.3	24.9	26.3	21.8	19.9	18.9	18.6	19.2	19.1
75,0°	10.0	9.2	8.5	8.2	8.6	8.9	8.8	8.1	8.3	8.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125Q01AA EAN: 4058352847435	LP number 59465_28
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°	270°			
	310°	305°	300°	295°	290°	285°	280°	275°				
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	1.7	1.7
0,5°	27786.6	28067.5	27806.6	28093.3	27849.6	28119.0	27869.7	28127.6	27881.2	27881.2	13.4	15.0
1,0°	27508.6	27479.9	27534.4	27500.0	27563.0	27520.0	27586.0	27525.8	27606.0	27606.0	26.3	41.4
1,5°	26276.2	26244.6	26313.4	26250.4	26299.1	26253.2	26310.6	26244.6	26310.6	26310.6	37.7	79.1
2,0°	24780.1	24487.7	24794.4	24464.8	24774.3	24447.6	24765.7	24433.3	24757.1	24757.1	75.2	154.2
3,0°	20650.1	20377.8	20578.4	20309.0	20532.6	20248.8	20483.8	20223.0	20498.2	20498.2	117.9	272.1
4,0°	16150.3	15462.5	16024.2	15319.2	15909.6	15175.9	15815.0	15135.7	15809.3	15809.3	120.8	392.9
5,0°	11742.3	11438.5	11553.1	11243.6	11372.6	11108.9	11240.7	11011.5	11229.3	11229.3	110.2	503.1
6,0°	8299.9	8174.0	8239.1	7966.3	8043.3	7775.1	7897.2	7682.8	7869.1	7869.1	93.8	596.9
7,0°	5698.3	5534.7	5550.7	5338.6	5313.1	5085.6	5105.3	4937.1	5017.9	5017.9	73.3	670.2
8,0°	3904.7	3783.2	3740.8	3552.5	3466.2	3283.9	3249.3	3152.1	3198.0	3198.0	55.5	725.6
9,0°	2617.3	2503.8	2416.7	2267.6	2190.8	2085.1	2056.4	2005.7	2022.3	2022.3	40.2	765.9
10,0°	1658.6	1560.9	1502.1	1391.0	1340.3	1263.2	1226.7	1184.2	1181.6	1181.6	89.8	855.6
15,0°	168.9	158.6	154.8	146.8	144.7	139.0	139.0	135.4	137.1	137.1	21.8	877.4
20,0°	66.6	64.0	65.5	63.5	65.0	63.1	65.0	63.3	65.2	65.2	19.8	897.2
30,0°	33.1	33.2	33.5	33.1	32.6	32.6	32.6	32.7	32.7	32.7	23.6	920.8
45,0°	31.1	30.9	31.1	31.2	31.6	31.8	31.5	30.8	31.6	31.6	37.1	957.9
60,0°	19.1	18.6	18.5	18.2	18.0	21.1	20.5	19.4	19.2	19.2	28.9	986.8
75,0°	8.0	7.6	8.3	8.3	8.0	7.6	7.7	8.2	8.7	8.7	13.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125Q01AA EAN: 4058352847435	LP number 59465_28
----------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 10°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	173640	1334.7
95	234	251	165155	1226.1
90	216	248	156333	1128.3
85	200	245	147517	1042.2
80	184	242	138945	955.4
75	169	239	130173	874.9
70	156	236	121492	805.6
65	142	233	112656	731.9
60	129	229	103961	663.8
55	118	226	95473	607.1
50	104	221	86969	533.5
45	93	217	78285	476.9
40	81	212	69174	415.7
35	70	207	60572	358.8
30	60	201	52377	308.2
25	48	193	43009	247.7
20	39	185	35050	203.1
15	28	173	25743	149.1
10	19	159	17481	104.7
5	9	132	8739	56.3
1	2	77	2359	20.5

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
90	214	248	150065	1109.6
90	212	248	149247	1098.9
85	196	245	140994	1012.8
80	180	242	132453	926.7
75	165	238	124216	846.8
70	151	235	115888	772.9
65	138	232	107519	704.8
60	126	228	99580	642.9
55	114	225	90998	579.8
50	101	220	83216	512.9
45	90	216	74641	457.1
40	79	211	66468	401.3
35	68	206	58111	345.0
30	58	200	49863	294.9
25	47	192	41391	240.2
20	37	184	33024	191.2
15	27	172	24617	142.4
10	18	157	16766	98.5
5	9	132	8660	55.6
1	2	77	2339	20.2

Photometric test report

Family Floodlight FL11	Order number: 5XA779125Q01AA EAN: 4058352847435	LP number 59465_28
----------------------------------	--	------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	173640.0	1334.7
25.0	150620.0	1116.9