




Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1EDV4E5GE EAN: 4058352965290	LP number 59263_192
	Version cover frosted, elliptical narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 14910 lm Power consumption = 84.5 W Luminous efficacy = 176.4 lm/W	serial documentation 26.09.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 1670 cd/klm**

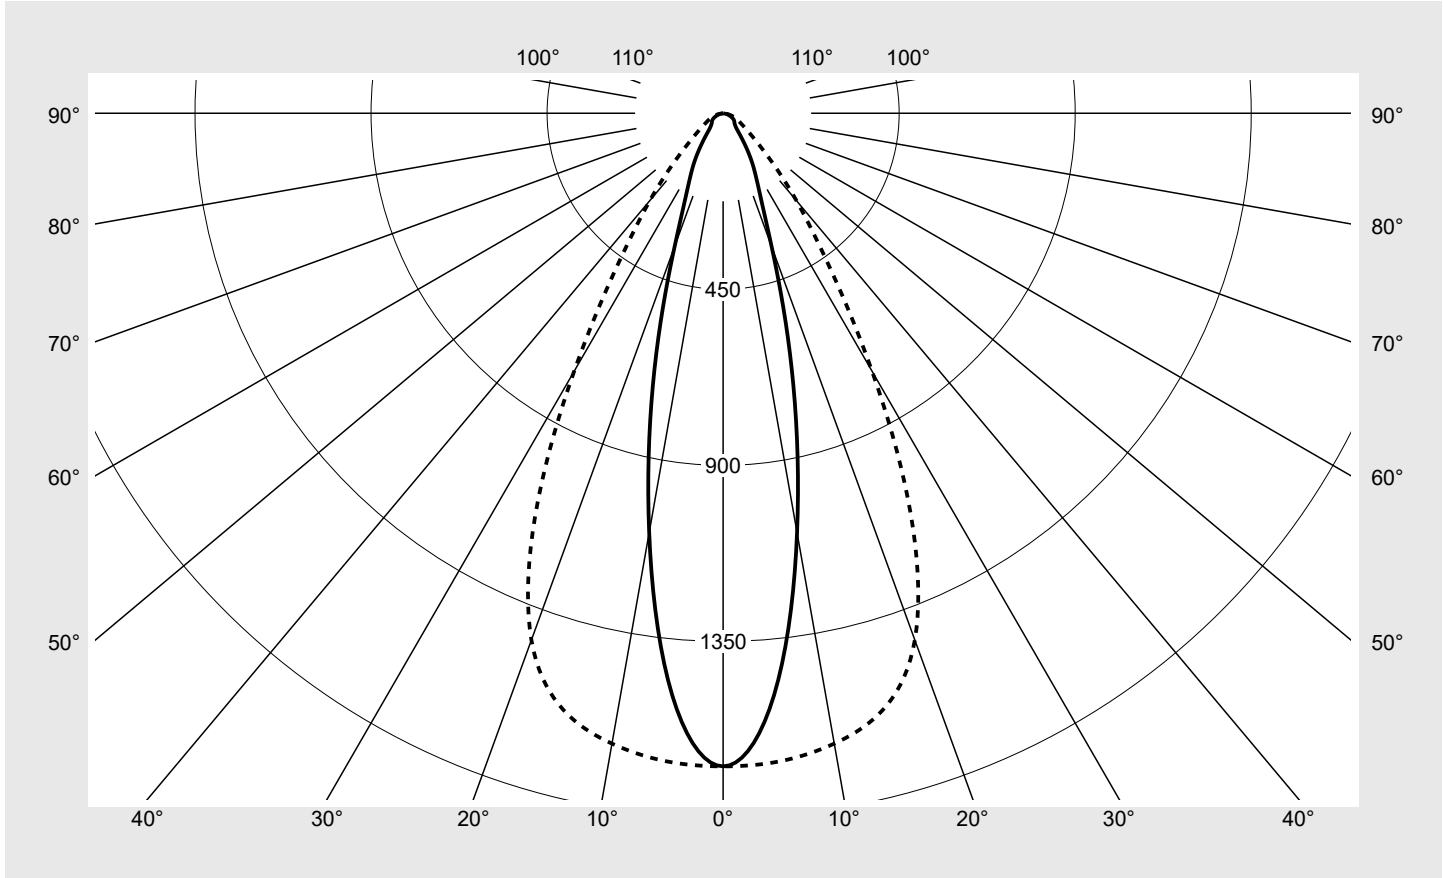

Classifications	
DIN 5040	A 7 0
CIE	N1=85 N2=95 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1EDV4E5GE EAN: 4058352965290	LP number 59263_192
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	10.0	10.0
5°	1493.3	1495.6	1516.6	1565.9	1616.3	1649.8	1662.9	75.0	85.0
10°	1088.5	1106.7	1175.0	1303.4	1460.6	1586.1	1636.2	126.8	211.8
15°	678.3	712.7	825.0	1006.5	1239.9	1474.8	1578.7	151.0	362.9
20°	362.1	388.9	492.0	707.6	980.6	1275.8	1432.9	148.2	511.0
25°	217.8	231.1	285.8	436.7	705.9	972.9	1137.5	127.8	638.8
30°	151.3	158.5	185.3	264.1	455.8	646.3	761.7	99.0	737.8
35°	95.4	107.0	131.3	171.8	268.4	391.1	463.8	70.7	808.5
40°	57.7	64.5	93.9	120.6	157.9	239.7	291.4	50.0	858.5
45°	43.5	45.9	58.2	86.3	99.5	145.4	176.9	35.2	893.7
50°	37.7	39.0	42.8	61.0	68.3	89.3	109.1	26.2	919.9
55°	34.6	35.0	36.7	43.5	50.5	59.6	73.7	20.9	940.8
60°	30.2	31.1	32.8	34.2	38.6	42.0	53.5	17.5	958.3
65°	23.9	25.4	29.1	28.1	30.1	30.8	41.3	14.6	972.8
70°	17.0	18.4	22.5	23.3	23.4	22.7	30.8	11.5	984.3
75°	10.9	12.0	16.2	17.9	17.4	15.7	20.7	8.4	992.7
80°	6.2	6.7	9.0	10.7	11.0	9.3	11.6	5.0	997.7
85°	3.1	3.3	4.2	5.0	4.8	3.9	4.2	2.3	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1EDV4E5GE EAN: 4058352965290	LP number 59263_192
---------------------------------------	---	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.1	16.4	15.5	16.7	17.0	20.1	21.4	20.5	21.7	22.0
	3H	16.3	17.4	16.7	17.7	18.1	20.7	21.8	21.1	22.1	22.5
	4H	16.7	17.7	17.1	18.1	18.4	21.0	22.0	21.4	22.3	22.7
	6H	16.9	17.8	17.3	18.2	18.6	21.2	22.1	21.6	22.4	22.8
	8H	17.1	17.9	17.5	18.3	18.7	21.4	22.1	21.8	22.5	22.9
	12H	17.1	17.9	17.5	18.3	18.7	21.4	22.1	21.8	22.5	22.9
4H	2H	16.0	16.9	16.4	17.3	17.6	20.1	21.2	20.5	21.5	21.9
	3H	17.4	18.2	17.8	18.6	19.0	20.8	21.7	21.3	22.1	22.5
	4H	17.9	18.6	18.3	19.0	19.5	21.2	22.0	21.7	22.4	22.8
	6H	18.2	18.8	18.6	19.3	19.7	21.5	22.1	22.0	22.6	23.0
	8H	18.3	18.9	18.8	19.3	19.8	21.6	22.2	22.1	22.6	23.1
	12H	18.4	18.9	18.9	19.3	19.8	21.7	22.2	22.2	22.6	23.1
8H	4H	18.4	18.9	18.8	19.4	19.8	21.3	21.9	21.8	22.3	22.8
	6H	18.8	19.3	19.3	19.7	20.3	21.7	22.2	22.2	22.6	23.2
	8H	19.0	19.4	19.5	19.9	20.4	21.8	22.3	22.4	22.7	23.3
	12H	19.1	19.4	19.6	19.9	20.5	21.9	22.3	22.5	22.8	23.3
12H	4H	18.4	18.9	18.9	19.3	19.8	21.3	21.8	21.8	22.3	22.8
	6H	18.9	19.3	19.4	19.8	20.3	21.7	22.1	22.2	22.6	23.1
	8H	19.1	19.5	19.6	20.0	20.5	21.9	22.2	22.4	22.7	23.3


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2250 B = 58
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		7026.9	7412.4	9396.1	13940.6	16082.5	23493.4	28589.6	
50°		6708.0	6928.5	7607.0	10848.7	12142.0	15878.0	19398.5	
55°		6884.5	6968.0	7314.4	8660.0	10062.7	11877.1	14684.4	
60°		6890.8	7117.3	7498.4	7821.1	8818.7	9592.9	12223.2	
65°		6468.8	6859.7	7871.6	7599.1	8145.5	8321.0	11169.0	
70°		5671.2	6134.2	7509.2	7790.8	7815.5	7572.0	10298.2	
75°		4792.7	5301.2	7148.7	7916.3	7687.7	6948.7	9132.9	
80°		4049.1	4378.7	5925.6	7011.8	7217.8	6111.1	7645.4	
85°		4096.6	4369.2	5559.5	6589.9	6313.3	5104.7	5470.4	

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1EDV4E5GE EAN: 4058352965290	LP number 59263_192
--	---	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

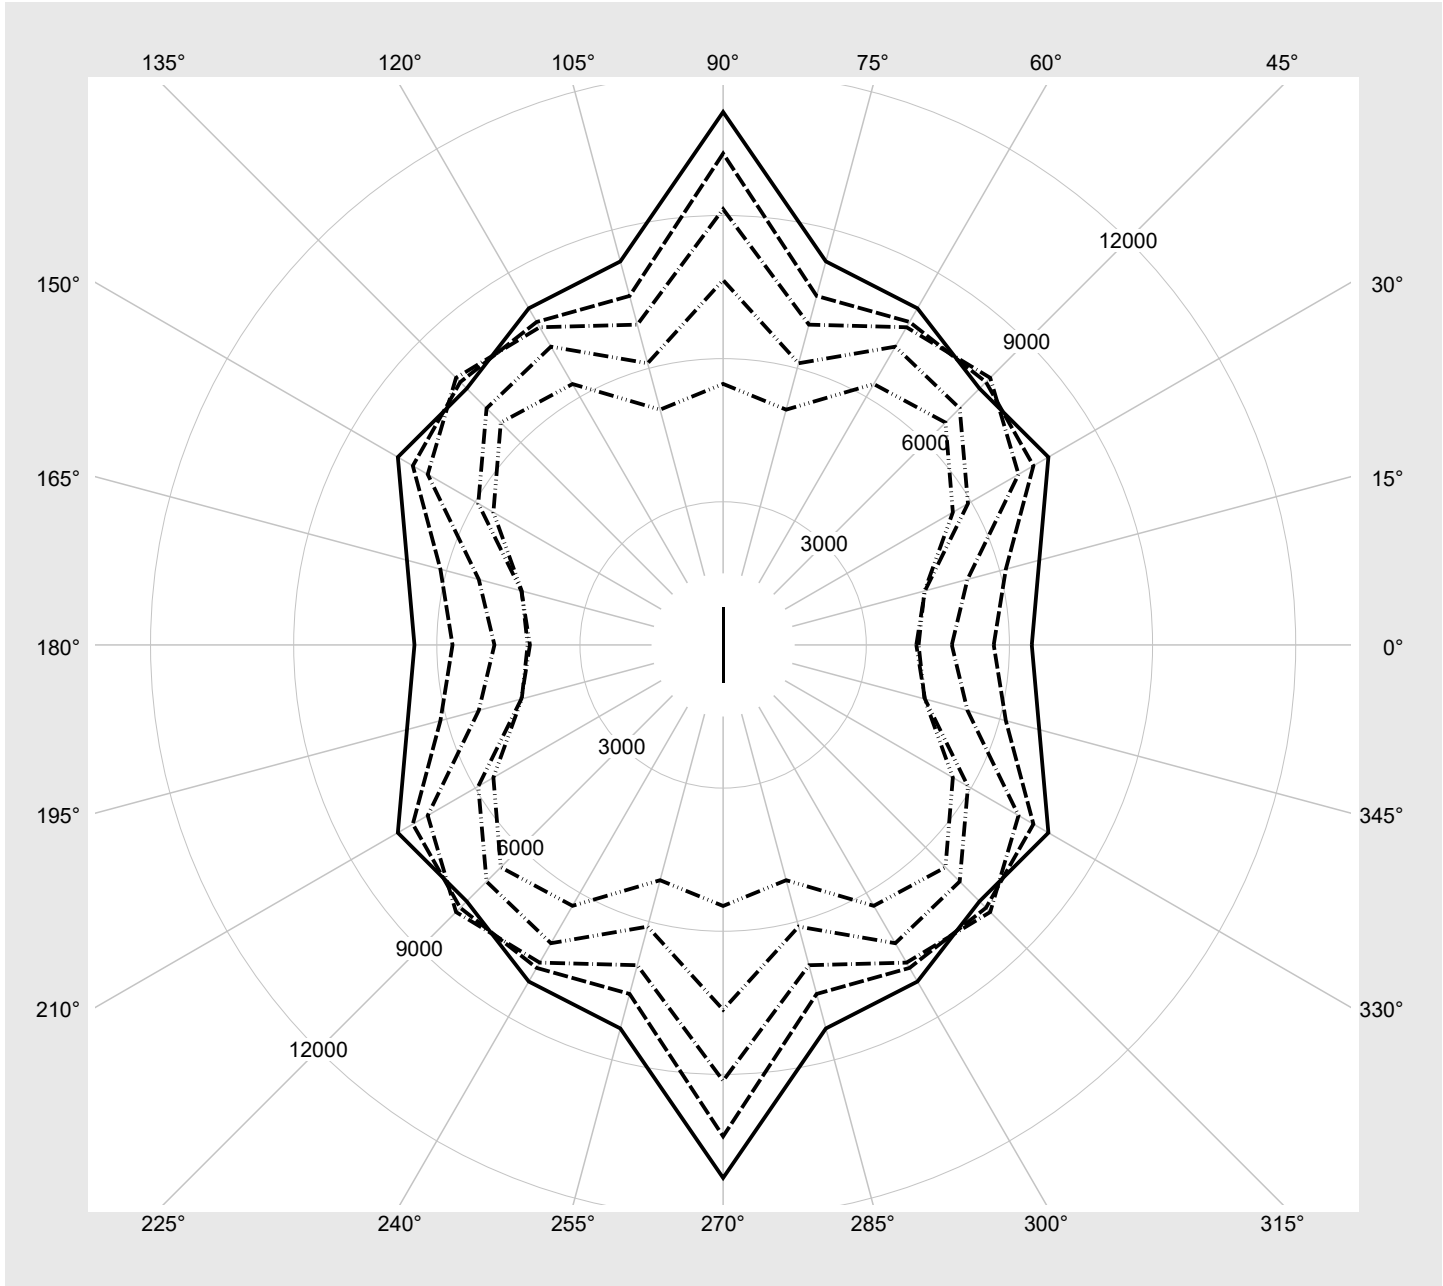

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE1EDV4E5GE EAN: 4058352965290	LP number 59263_192
---------------------------------------	---	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	14910	84.5
95	240	252	14159	79.8
90	226	250	13393	75.1
85	213	248	12680	70.7
80	199	245	11906	66.0
75	186	243	11176	61.7
70	173	240	10444	57.3
65	160	237	9705	53.0
60	147	234	8957	48.7
55	134	231	8198	44.4
50	121	227	7436	40.1
45	109	223	6727	36.4
40	96	218	5947	32.2
35	84	213	5226	28.4
30	72	208	4498	24.6
25	59	201	3698	20.4
20	47	192	2957	16.5
15	35	181	2210	12.4
10	24	168	1518	8.6
5	12	142	753	4.2
2	4	102	243	1.3