

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL12DN4EXM3S
EAN: 4058352935095

LP number
58689_119



Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting emergency light operation: 3 h
Rated values Net luminous flux = 1000 lm
 Power consumption = 7.2 W
 Luminous efficacy = 138.9 lm/W

serial
documentation
29.09.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 575 cd/klm

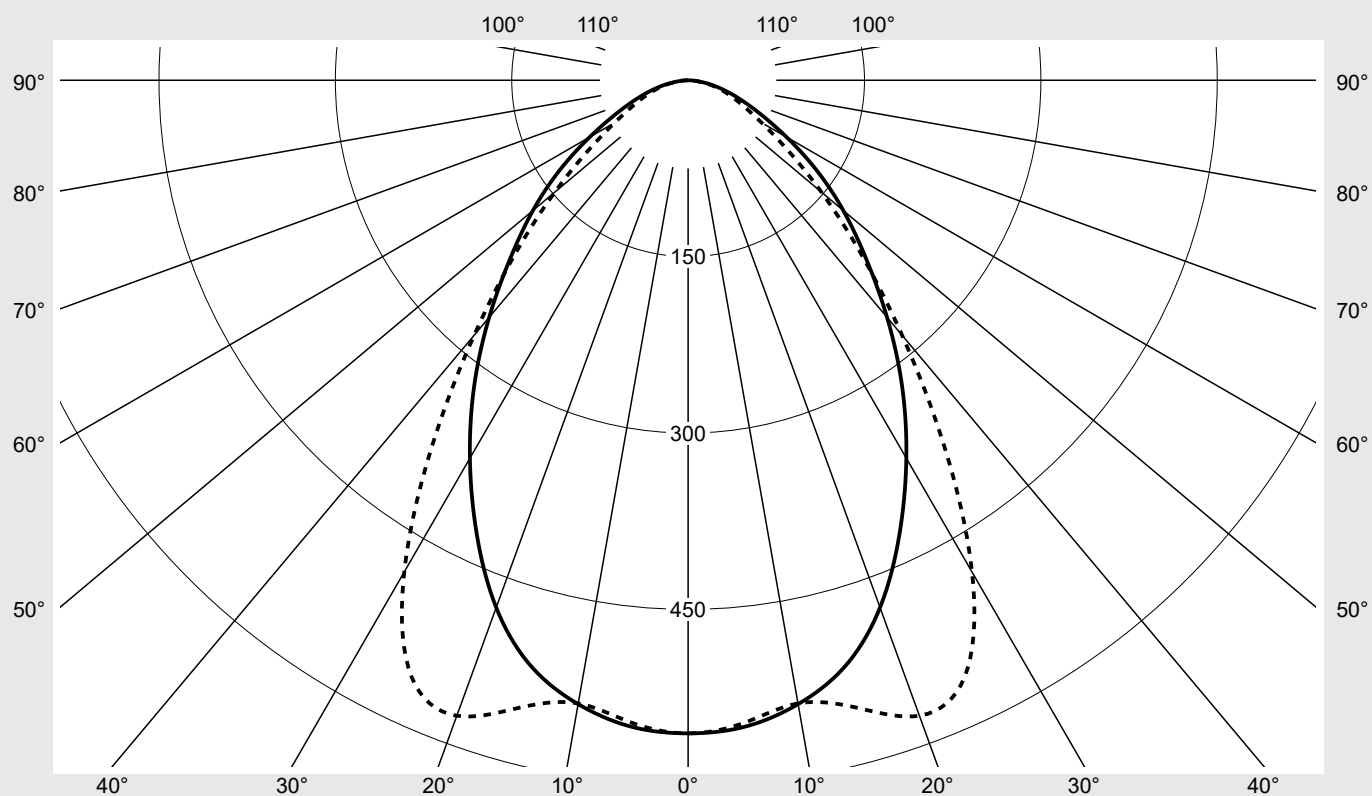

Classifications

DIN 5040 A 5 0
 CIE N1=66 N2=91 N3=98
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL12DN4EXM3S EAN: 4058352935095	LP number 58689_119
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	555.4	555.4	555.4	555.4	555.4	555.4	555.4	3.3	3.3
5°	551.9	549.3	545.0	546.0	548.1	548.0	548.5	26.2	29.5
10°	538.7	535.0	528.7	529.1	532.7	535.9	538.2	50.8	80.3
15°	515.9	510.9	504.6	513.1	530.5	544.7	552.3	74.2	154.5
20°	477.2	471.4	470.1	497.6	537.0	563.7	575.1	95.8	250.2
25°	425.5	419.5	426.9	469.4	521.2	548.6	558.0	111.1	361.3
30°	371.2	364.3	378.4	421.3	459.9	477.2	482.9	115.5	476.8
35°	317.2	309.8	328.6	357.7	367.8	374.7	379.7	109.4	586.2
40°	263.2	255.5	280.4	291.4	277.2	277.7	283.1	97.2	683.4
45°	213.7	204.0	230.1	230.5	202.8	200.2	207.0	82.5	765.9
50°	172.3	160.2	177.2	176.6	149.6	143.3	148.0	67.7	833.6
55°	133.3	121.6	126.4	129.1	111.8	101.0	103.0	53.0	886.6
60°	96.7	87.9	85.2	90.2	83.1	71.0	72.1	39.7	926.3
65°	67.7	61.0	56.3	61.1	60.5	50.8	52.1	29.0	955.3
70°	46.9	41.7	36.5	40.2	42.1	36.4	38.1	20.6	975.8
75°	30.9	26.7	22.6	25.0	27.1	24.7	26.6	13.7	989.5
80°	17.8	14.8	12.0	13.1	14.7	14.1	15.6	7.7	997.1
85°	6.6	5.4	4.4	4.8	5.3	5.4	5.9	2.9	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL12DN4EXM3S EAN: 4058352935095	LP number 58689_119
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.9	16.4	15.2	16.7	17.0	14.3	15.8	14.7	16.1	16.5
	3H	15.6	16.9	16.0	17.3	17.6	14.9	16.3	15.3	16.6	16.9
	4H	15.9	17.1	16.3	17.5	17.9	15.2	16.4	15.6	16.8	17.2
	6H	16.1	17.3	16.5	17.6	18.0	15.4	16.5	15.8	16.9	17.3
	8H	16.3	17.3	16.7	17.7	18.1	15.5	16.6	16.0	16.9	17.3
	12H	16.3	17.2	16.7	17.6	18.1	15.6	16.5	16.0	16.9	17.3
4H	2H	15.2	16.4	15.6	16.8	17.2	14.8	16.0	15.2	16.4	16.7
	3H	16.0	17.1	16.5	17.4	17.9	15.6	16.6	16.0	17.0	17.4
	4H	16.4	17.3	16.8	17.7	18.1	15.9	16.8	16.3	17.2	17.7
	6H	16.7	17.5	17.1	17.9	18.4	16.2	17.0	16.6	17.4	17.9
	8H	16.8	17.5	17.2	17.9	18.4	16.3	17.0	16.8	17.4	17.9
	12H	16.9	17.5	17.3	17.9	18.4	16.4	17.0	16.8	17.4	17.9
8H	4H	16.5	17.2	16.9	17.6	18.1	16.0	16.7	16.5	17.2	17.7
	6H	16.8	17.4	17.3	17.9	18.4	16.4	17.0	16.9	17.4	17.9
	8H	16.9	17.4	17.4	17.9	18.4	16.5	17.0	17.0	17.5	18.0
	12H	17.0	17.4	17.5	17.9	18.5	16.6	17.0	17.1	17.5	18.1
12H	4H	16.5	17.1	17.0	17.6	18.1	16.0	16.7	16.5	17.1	17.6
	6H	16.8	17.3	17.3	17.8	18.3	16.4	16.9	16.9	17.4	17.9
	8H	17.0	17.4	17.5	17.9	18.4	16.5	17.0	17.1	17.5	18.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	3473.8	3315.9	3739.7	3746.3	3296.8	3253.9	3365.4
50°	3080.5	2865.4	3169.0	3158.5	2675.3	2562.5	2646.4
55°	2671.8	2436.0	2532.2	2586.6	2239.9	2024.6	2064.1
60°	2222.4	2020.2	1959.3	2073.1	1911.1	1632.4	1656.6
65°	1840.8	1659.8	1532.0	1660.8	1646.1	1382.8	1416.0
70°	1575.7	1402.9	1227.0	1351.7	1415.2	1224.1	1280.6
75°	1373.8	1184.4	1002.3	1108.2	1202.5	1095.5	1180.3
80°	1176.2	977.2	792.7	870.4	970.1	935.9	1033.0
85°	869.5	712.3	579.4	629.2	695.9	707.9	774.7

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL12DN4EXM3S
EAN: 4058352935095

LP number
58689_119

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

