


# Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3M41F08ME</b> <b>EAN: 4058352559413</b>	<b>LP number</b> <b>59453_164</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, extreme wide distribution (ST1.0a) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 18310 lm Power consumption = 124.7 W Luminous efficacy = 146.8 lm/W	<b>serial documentation</b> <b>28.09.2023</b>





**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 661 cd/klm**

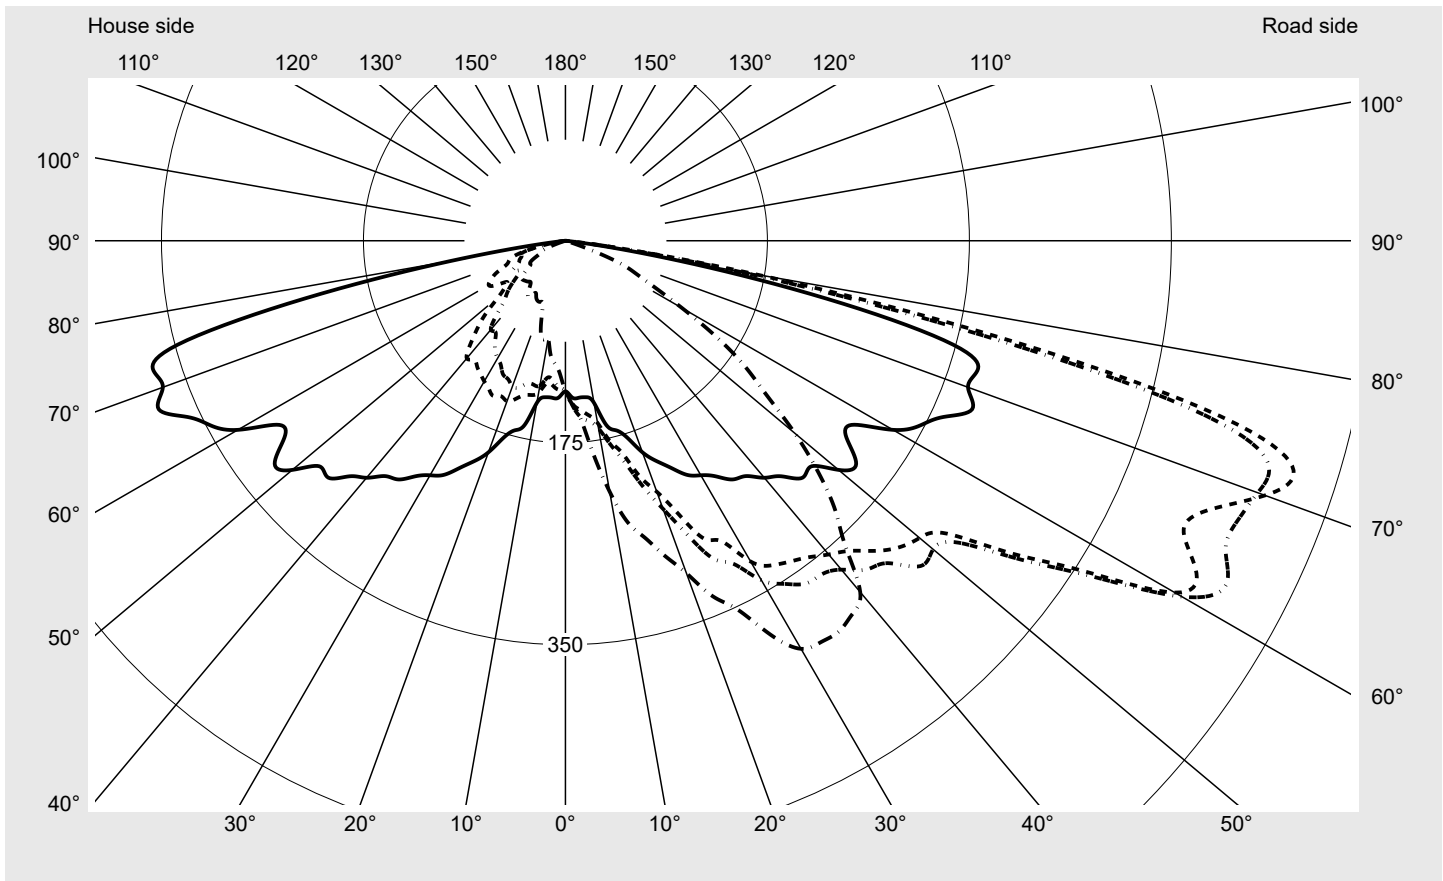

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G1
Imax 70°	645.0
Imax 80°	167.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3M41F08ME</b> <b>EAN: 4058352559413</b>	<b>LP number</b> 59453_164
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 72.5°**    **KMK 70°**    **KMK 67.5°**    **KMK 65°**      **siteco**

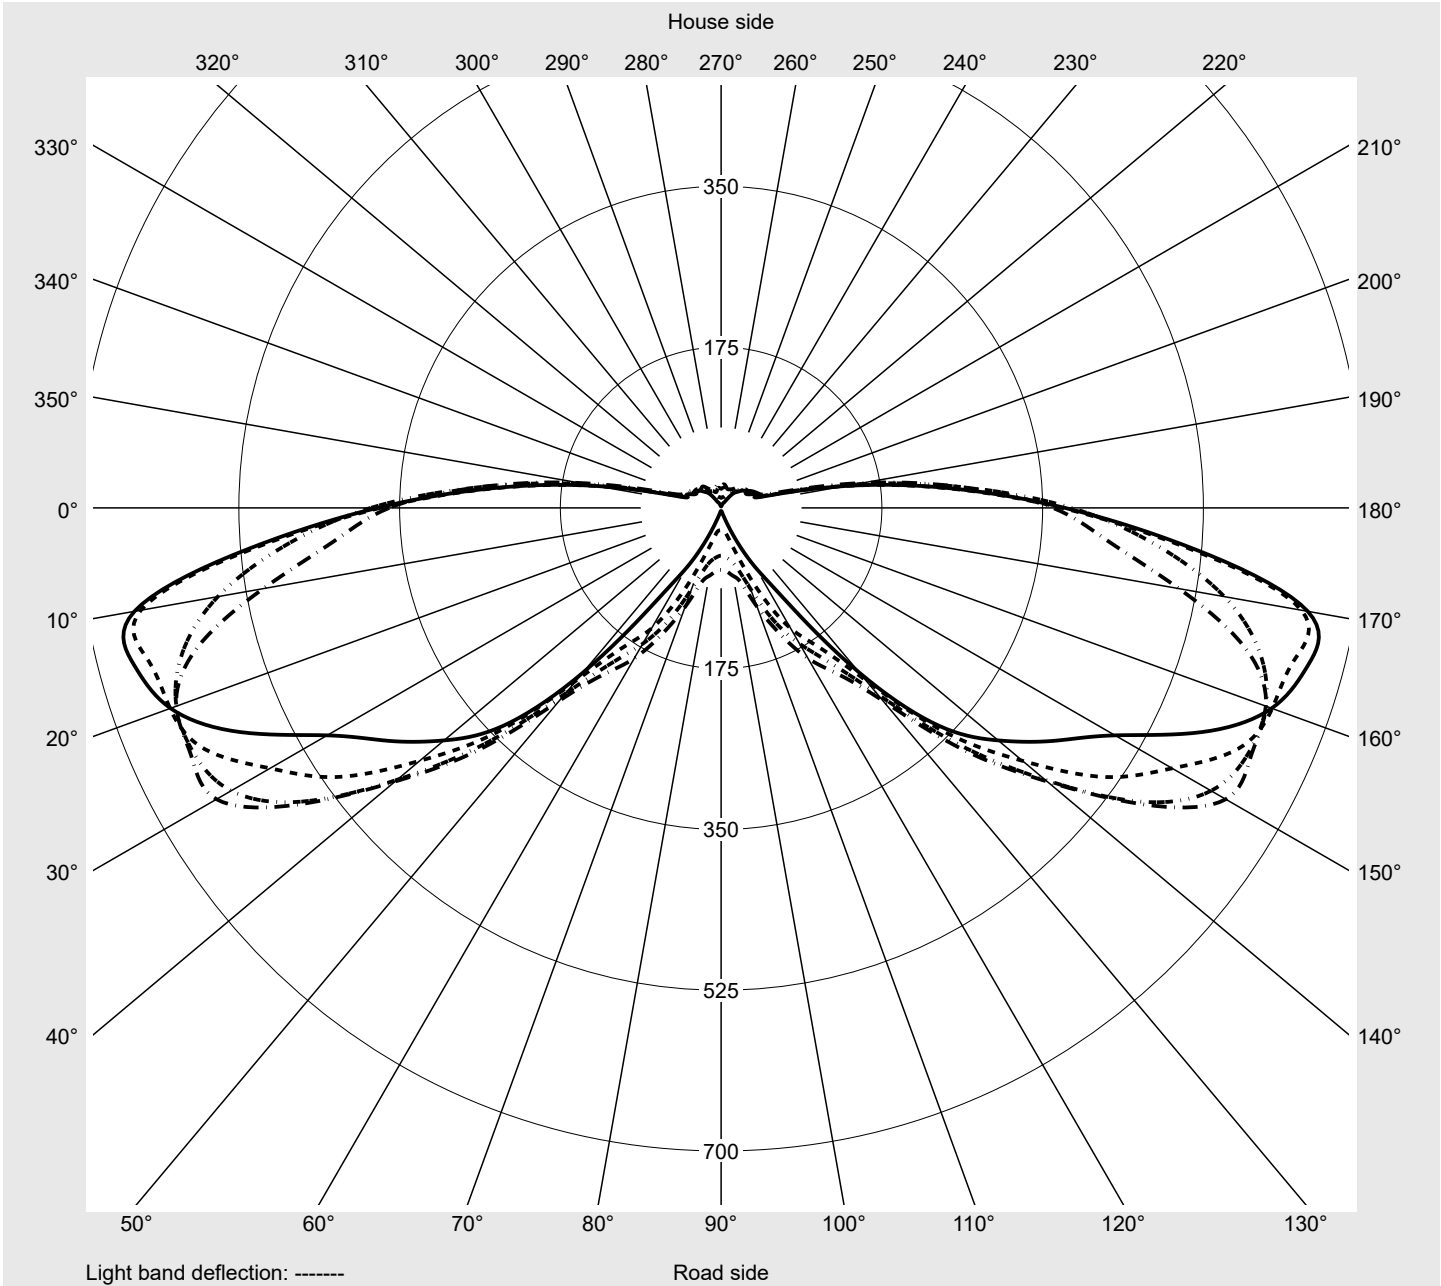

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3M41F08ME</b> <b>EAN: 4058352559413</b>	<b>LP number</b> 59453_164
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	136.0	138.5	139.5	141.5	143.1	143.0	142.2	142.5	144.1	144.9	146.0	147.0	146.5
5,0°	136.5	139.7	143.0	147.1	153.5	155.8	154.9	157.2	159.8	161.3	162.4	161.4	159.9
7,5°	136.8	142.1	147.3	152.3	157.6	161.0	165.6	170.9	172.5	171.3	168.7	172.0	177.4
10,0°	142.6	147.8	153.0	160.3	165.1	169.3	177.3	184.1	187.2	191.2	197.2	200.3	201.5
12,5°	163.5	167.3	172.4	177.7	181.1	185.6	192.8	201.2	209.5	215.8	222.2	227.8	228.1
15,0°	170.1	176.4	184.9	190.6	198.6	206.4	211.4	221.4	229.1	235.7	249.5	253.9	257.3
17,5°	179.2	190.7	205.0	214.1	223.0	234.7	240.8	245.8	249.0	249.5	252.7	262.0	271.2
20,0°	195.1	207.0	215.2	231.4	247.2	258.6	268.3	276.9	278.8	279.9	278.5	281.6	289.1
22,5°	206.7	223.1	238.2	256.5	275.4	289.6	298.9	309.0	313.5	307.5	303.6	305.9	310.6
25,0°	217.3	238.7	261.6	285.0	304.1	321.3	330.9	339.9	339.8	328.5	325.0	328.2	331.9
27,5°	228.8	250.7	274.0	293.6	315.7	338.7	353.6	358.1	355.9	348.8	344.1	344.8	350.5
30,0°	234.6	257.8	285.1	320.9	339.6	353.2	369.3	375.8	373.0	369.3	367.3	365.9	370.3
32,5°	242.0	270.2	304.2	333.4	352.5	376.1	390.9	394.3	396.6	397.3	390.7	385.7	391.9
35,0°	252.5	278.7	309.9	339.3	362.7	383.0	387.6	394.2	399.9	400.7	399.8	396.9	399.9
37,5°	257.0	286.3	319.3	345.7	364.5	385.4	398.4	404.7	404.4	401.3	397.7	392.9	395.0
40,0°	268.1	303.0	333.2	354.8	372.0	393.7	405.0	408.1	406.8	400.0	392.0	388.4	386.3
42,5°	276.8	303.3	345.9	364.5	386.3	410.9	422.9	418.4	406.0	399.1	394.1	388.4	385.1
45,0°	290.4	314.6	356.8	380.0	395.0	419.0	427.9	425.9	414.6	410.1	393.1	372.1	367.5
47,5°	289.2	326.3	371.3	392.9	417.2	442.3	443.9	426.0	419.5	419.4	386.4	347.8	344.4
50,0°	308.9	351.5	380.8	400.6	415.9	441.5	454.5	442.7	420.7	400.5	372.2	341.7	317.5
52,5°	317.5	363.9	397.1	416.9	429.8	452.2	458.6	430.6	406.6	377.8	343.7	306.5	283.0
55,0°	297.2	367.5	434.3	472.6	481.5	479.0	482.2	456.7	420.1	362.3	306.7	278.1	254.3
57,5°	296.7	377.7	467.0	532.9	541.4	531.2	516.3	481.5	423.8	352.9	292.5	256.9	237.1
60,0°	327.7	424.7	532.9	609.7	616.7	592.2	550.6	499.9	432.9	346.5	293.2	258.0	225.8
62,5°	346.5	437.1	534.0	615.5	645.4	626.7	593.0	540.4	447.6	365.5	288.9	243.1	205.4
65,0°	361.3	424.1	506.1	591.1	631.1	636.8	634.3	563.0	463.4	371.8	274.1	220.4	189.1
67,5°	381.4	477.6	556.3	606.9	631.1	633.1	615.9	557.5	460.5	362.5	264.1	205.0	170.7
70,0°	371.2	512.4	641.5	645.0	638.4	620.8	567.0	510.7	428.4	345.5	245.1	184.7	151.5
72,5°	374.2	517.9	648.5	661.5	637.8	577.5	495.2	442.1	393.8	335.5	234.2	125.1	75.1
75,0°	347.7	473.1	561.8	587.5	559.1	469.3	379.1	352.4	316.6	217.7	99.9	32.0	9.7
77,5°	231.6	318.2	373.2	380.7	345.4	305.4	256.2	200.5	115.3	39.5	8.3	0.0	0.0
80,0°	101.0	138.7	164.6	167.3	147.4	125.6	89.2	36.7	6.9	0.0	0.0	0.0	0.0
82,5°	20.5	26.6	30.7	35.4	36.7	24.6	7.9	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3M41F08ME</b> <b>EAN: 4058352559413</b>	<b>LP number</b> <b>59453_164</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	144.8	144.1	144.5	144.0	142.6	142.1	133.5	131.6	129.3	126.9	125.2	124.6	123.8
5,0°	158.2	157.8	158.6	158.1	156.5	155.6	133.0	130.2	125.9	121.7	119.4	118.0	114.8
7,5°	178.7	179.4	181.1	183.4	185.1	186.9	132.9	129.1	124.4	119.7	116.9	115.9	112.8
10,0°	205.7	209.9	211.3	215.8	220.4	220.8	140.7	137.8	133.5	127.5	121.9	117.7	111.5
12,5°	232.7	236.3	237.8	243.2	249.0	250.1	154.5	145.0	136.9	127.7	121.4	117.1	113.6
15,0°	261.2	261.9	264.6	264.9	265.0	266.5	160.7	148.9	138.6	128.1	120.8	113.7	107.5
17,5°	277.5	280.8	283.9	286.2	285.1	286.2	166.3	155.1	143.7	133.1	121.5	111.5	104.3
20,0°	298.0	303.4	307.6	308.4	304.5	306.5	178.5	161.6	148.0	134.3	118.9	109.4	102.2
22,5°	320.7	328.0	334.6	335.8	333.1	333.4	182.1	163.0	145.8	129.8	117.7	105.7	95.7
25,0°	338.4	346.6	350.8	353.0	353.2	352.4	190.0	168.2	148.2	127.8	111.4	98.7	90.7
27,5°	359.7	366.9	370.6	377.0	383.3	384.8	200.1	173.4	144.1	121.3	106.9	93.9	79.2
30,0°	375.7	381.5	390.6	401.2	407.5	408.3	205.1	174.8	140.7	117.5	99.7	85.4	71.7
32,5°	393.6	392.0	404.9	419.2	418.6	412.3	207.4	171.7	136.9	113.1	95.0	80.0	69.1
35,0°	404.5	402.8	409.9	423.8	420.5	413.2	213.2	170.1	133.3	106.3	88.2	76.3	67.6
37,5°	399.5	403.3	410.9	416.6	412.9	408.1	213.8	171.6	130.0	99.6	82.1	71.8	65.5
40,0°	386.3	392.3	396.4	395.6	396.2	397.4	217.2	175.9	133.0	100.6	81.7	68.4	61.2
42,5°	386.4	382.6	367.3	363.4	362.2	359.2	228.1	176.0	122.2	89.8	74.3	61.1	55.4
45,0°	365.8	359.0	351.7	346.0	334.0	330.8	235.4	171.4	108.4	76.4	69.0	58.8	52.0
47,5°	342.4	323.4	311.8	307.1	297.3	297.4	228.3	158.8	93.8	69.4	63.7	55.9	47.6
50,0°	302.7	287.1	278.3	268.0	258.2	259.5	230.0	147.2	75.7	63.0	57.4	50.4	44.1
52,5°	267.1	256.9	246.3	226.1	218.2	219.8	221.6	132.2	65.8	55.3	48.9	43.5	41.7
55,0°	236.1	223.9	208.7	185.6	183.8	190.1	211.1	127.7	62.2	48.9	42.9	40.1	39.1
57,5°	214.9	185.4	166.0	156.8	153.2	155.2	215.4	136.8	71.9	47.9	41.8	36.8	35.6
60,0°	190.0	155.2	132.8	126.9	120.0	116.8	227.3	144.6	76.8	52.7	46.0	38.9	36.5
62,5°	169.1	132.8	109.1	99.1	89.9	86.8	251.8	153.0	72.6	48.8	41.4	37.5	34.4
65,0°	151.1	114.6	84.7	75.2	69.3	67.5	262.0	156.1	66.1	44.4	40.7	36.8	31.7
67,5°	135.0	94.0	68.0	57.8	53.7	51.9	261.8	147.7	56.2	43.0	38.7	36.4	32.8
70,0°	105.8	62.0	38.0	27.3	24.7	24.3	246.4	137.3	52.4	40.5	36.3	34.4	34.0
72,5°	39.1	15.5	7.3	4.1	3.5	3.4	247.9	137.3	48.9	40.1	34.9	31.0	31.9
75,0°	0.8	0.0	0.0	0.0	0.0	0.0	221.1	119.2	39.4	37.2	34.1	29.4	28.2
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	144.4	78.3	25.0	25.1	25.2	20.5	15.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	62.8	34.1	12.2	12.0	10.8	6.6	2.1
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.0	6.8	2.7	2.6	1.8	0.7	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3M41F08ME</b> <b>EAN: 4058352559413</b>	<b>LP number</b> 59453_164
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	0.2	0.2
2,5°	122.7	120.0	117.8	117.0	116.9	114.6	112.3	113.9	114.3	113.7	114.7	1.6	1.8
5,0°	111.7	109.2	107.6	107.8	107.6	106.4	106.8	106.6	106.1	106.5	106.6	3.2	5.0
7,5°	109.8	108.4	104.8	100.5	98.9	96.9	95.7	96.6	96.1	97.0	99.1	5.0	10.0
10,0°	107.0	105.7	103.6	102.1	100.6	98.1	97.2	93.4	87.9	86.3	86.3	7.1	17.1
12,5°	108.9	103.0	100.0	97.9	96.7	94.5	92.5	90.1	87.2	86.9	87.7	9.5	26.6
15,0°	102.9	98.9	93.7	89.9	86.2	83.4	81.8	80.9	80.2	81.1	82.5	12.0	38.6
17,5°	97.9	92.0	87.4	83.5	79.7	75.4	71.2	70.8	70.5	69.2	68.3	14.5	53.1
20,0°	94.0	88.2	83.8	80.3	77.8	74.4	69.6	64.6	60.5	58.6	57.5	17.5	70.6
22,5°	87.7	80.7	77.3	76.3	74.7	70.4	67.8	65.8	63.3	59.0	57.3	20.8	91.4
25,0°	82.5	75.7	71.0	69.8	66.1	61.6	60.8	59.7	57.3	56.8	57.3	24.1	115.5
27,5°	74.4	72.4	69.4	66.4	61.7	58.7	57.3	57.1	56.9	55.4	54.9	27.4	142.9
30,0°	64.9	65.9	63.6	59.1	58.8	59.6	58.4	57.0	54.2	52.0	52.1	30.7	173.6
32,5°	64.8	61.8	58.4	57.3	57.7	56.3	53.8	53.2	53.4	55.5	57.3	34.1	207.7
35,0°	62.9	58.8	54.5	54.8	56.4	52.9	48.3	48.1	53.0	56.5	56.7	36.7	244.4
37,5°	60.6	57.7	54.8	53.1	52.5	52.4	51.6	49.2	49.3	50.9	51.0	38.9	283.3
40,0°	57.8	54.5	53.2	51.0	47.8	47.5	49.6	50.7	50.8	48.8	46.9	40.9	324.2
42,5°	54.2	51.8	48.1	46.9	46.8	48.5	49.4	49.8	49.9	48.7	48.0	42.5	366.7
45,0°	52.0	50.5	45.3	46.0	48.5	46.7	50.3	53.4	49.4	48.0	49.1	44.0	410.7
47,5°	44.6	45.0	44.6	44.1	42.0	42.4	45.4	48.7	46.6	46.2	50.1	44.6	455.3
50,0°	42.7	41.3	41.0	44.4	43.6	41.8	43.7	45.3	45.4	47.0	49.3	44.9	500.3
52,5°	42.8	40.1	37.4	40.8	42.8	41.7	39.9	41.4	43.3	44.0	43.9	44.4	544.7
55,0°	39.5	36.8	37.5	39.4	39.1	38.7	37.6	37.9	37.9	37.7	37.2	44.9	589.6
57,5°	37.9	36.2	36.2	35.3	34.2	35.0	34.5	34.9	36.1	36.4	36.3	46.4	636.0
60,0°	36.1	36.7	35.0	31.8	29.8	29.4	31.0	31.5	31.8	32.4	33.0	49.2	685.2
62,5°	31.2	33.6	34.9	30.3	27.4	26.1	26.3	27.8	28.2	27.2	26.2	50.5	735.7
65,0°	29.9	30.4	30.5	26.2	23.6	22.4	21.6	22.8	25.2	25.6	24.1	50.4	786.1
67,5°	30.4	27.7	24.1	21.8	21.1	20.1	18.3	18.6	21.4	21.9	20.8	50.7	836.8
70,0°	32.0	26.4	22.3	18.3	17.7	16.6	13.9	12.3	12.1	11.4	10.9	49.4	886.2
72,5°	29.0	24.5	20.6	12.7	7.4	6.2	4.3	2.6	1.9	1.7	1.6	45.6	931.7
75,0°	24.1	16.9	8.6	3.1	0.8	0.2	0.0	0.0	0.0	0.0	0.0	36.5	968.3
77,5°	10.3	3.7	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.7	990.0
80,0°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.4	998.4
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.6	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3M41F08ME</b> <b>EAN: 4058352559413</b>	<b>LP number</b> 59453_164
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18310	124.7	132.2	128.4
95	241	252	17373	117.0	124.0	120.5
90	229	250	16508	110.1	116.7	113.4
85	216	248	15571	102.8	109.0	105.9
80	203	246	14634	95.8	101.5	98.6
75	190	243	13696	88.9	94.1	91.5
70	178	241	12831	82.6	87.5	85.0
65	165	238	11894	76.0	80.5	78.2
60	152	235	10957	69.5	73.6	71.6
55	140	232	10092	63.7	67.4	65.6
50	127	229	9155	57.4	60.7	59.0
45	114	225	8218	51.1	54.1	52.6
40	102	221	7353	45.5	48.2	46.8
35	89	216	6416	39.6	41.8	40.7
30	76	210	5479	33.7	35.6	34.7
25	63	203	4541	28.0	29.5	28.8
20	51	195	3676	22.8	24.0	23.4
15	38	184	2739	17.2	18.1	17.6
13	33	179	2379	15.2	16.0	15.6