


# Photometric test report

<b>Family</b> <b>Licross® 11 Performance</b>	<b>Order number: 51TD16MN4GXM</b> <b>EAN: 4058352928950</b>	<b>LP number</b> <b>58519_284</b>
	<b>Version</b> cover frosted, direct-/ indirect distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG Multilumen <b>Rated values</b> Net luminous flux = 16020 lm Power consumption = 87.4 W Luminous efficacy = 183.3 lm/W	<b>serial documentation</b> <b>11.10.2023</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 429 cd/klm**

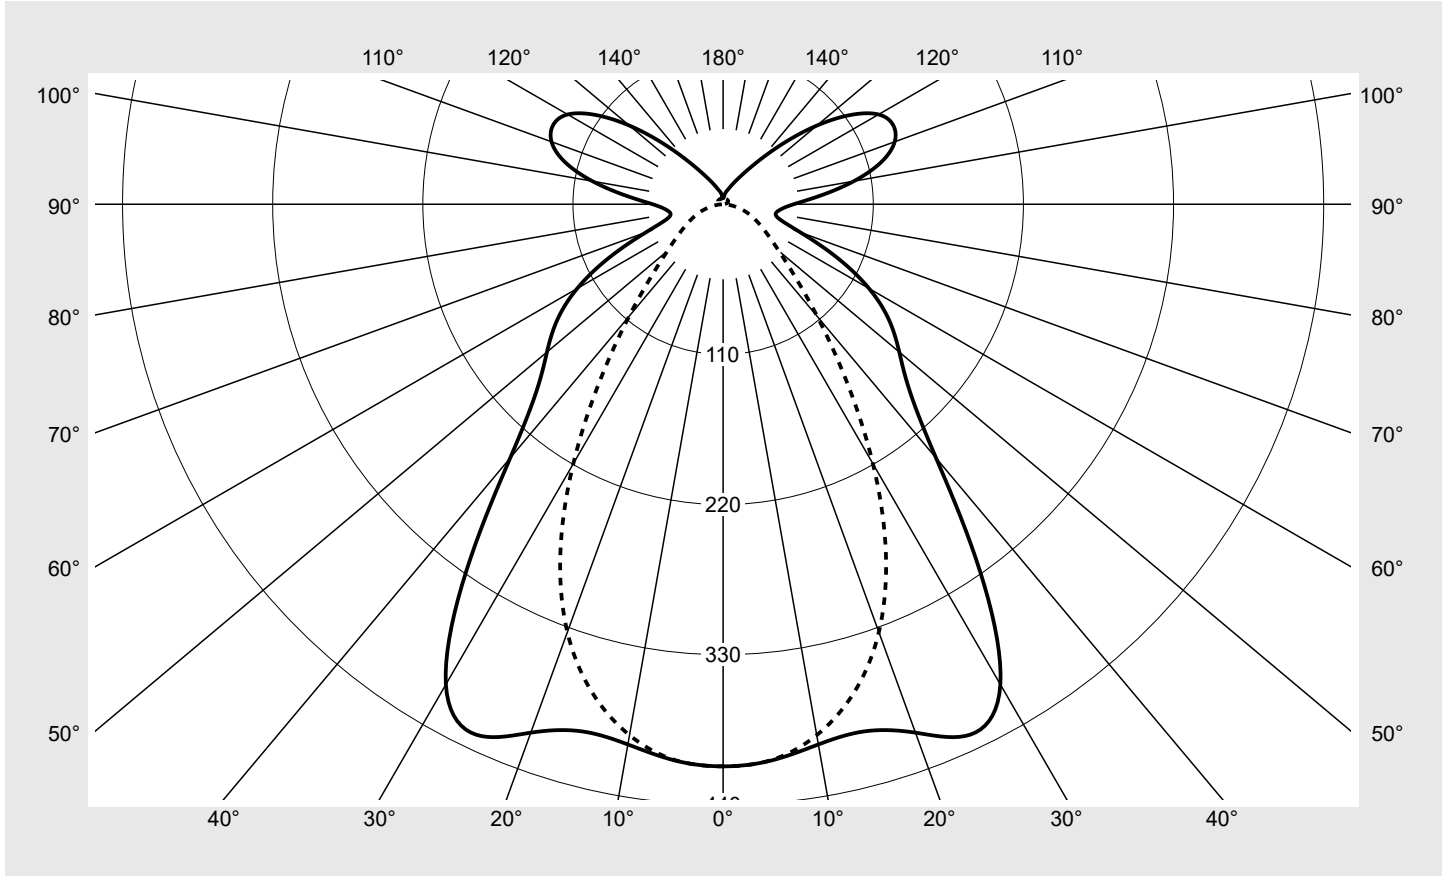

Classifications	
DIN 5040	B 5 1
CIE	N1=63 N2=86 N3=95 N4=78 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	78.1%
$\phi_o$	21.9%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 11 Performance</b>	Order number: <b>51TD16MN4GXM</b> EAN: <b>4058352928950</b>	LP number <b>58519_284</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	411.8	411.8	411.8	411.8	411.8	411.8	411.8	2.5	2.5
5°	409.0	407.3	405.0	406.4	408.3	408.3	408.7	19.5	21.9
10°	401.9	399.8	395.6	394.8	395.0	394.6	395.0	37.7	59.6
15°	399.8	396.0	386.0	378.7	373.7	370.5	370.4	54.1	113.8
20°	412.0	404.2	382.1	360.3	344.8	335.4	333.6	68.7	182.5
25°	428.7	419.7	386.2	342.0	307.4	287.4	282.2	81.0	263.5
30°	406.2	406.4	384.2	323.4	261.9	228.9	219.5	87.6	351.1
35°	328.1	339.8	351.8	297.2	211.1	168.2	156.8	84.4	435.5
40°	242.7	253.2	284.0	257.1	161.6	117.6	107.2	73.3	508.8
45°	193.2	191.3	206.1	202.2	118.6	81.5	73.7	60.3	569.1
50°	168.5	157.2	146.5	145.8	85.8	58.6	53.4	49.3	618.5
55°	148.6	133.1	107.2	99.9	62.9	44.3	40.9	40.6	659.0
60°	123.5	108.6	80.0	67.9	46.9	34.4	32.2	32.9	691.9
65°	91.5	81.0	59.1	47.5	36.1	27.0	25.4	25.6	717.5
70°	60.2	54.5	42.3	34.6	28.0	21.0	19.4	18.9	736.4
75°	43.1	39.2	31.3	26.2	21.7	15.5	13.5	14.3	750.7
80°	39.2	35.6	27.4	20.7	16.7	10.7	8.0	12.1	762.9
85°	42.5	38.8	29.2	19.4	12.9	6.9	3.4	11.8	774.7
90°	51.7	47.2	34.3	20.7	11.3	4.4	0.6	13.1	787.8
95°	71.3	64.2	44.5	24.7	12.8	5.2	1.1	17.1	804.9
100°	97.2	85.6	55.2	28.6	14.3	6.1	1.8	21.5	826.4
105°	120.2	103.0	65.3	32.5	15.7	6.9	2.8	25.1	851.6
110°	133.8	113.4	72.0	35.7	17.0	7.6	3.5	27.0	878.6
115°	137.4	116.7	75.1	37.4	17.7	8.2	3.9	27.0	905.5
120°	131.5	112.0	72.9	36.7	17.5	8.5	4.2	25.0	930.5
125°	114.0	97.3	64.4	33.4	16.5	8.4	4.4	20.9	951.4
130°	89.6	76.8	52.0	28.4	14.9	8.3	4.5	15.9	967.3
135°	64.2	55.4	38.9	22.9	13.2	7.9	4.4	11.1	978.4
140°	43.4	38.1	28.3	18.4	11.3	7.3	4.5	7.5	985.9
145°	29.7	26.7	21.1	14.9	9.5	6.3	4.4	5.0	990.9
150°	21.4	19.7	16.5	11.7	8.2	5.8	4.4	3.4	994.4
155°	16.0	15.0	12.7	9.4	8.0	5.2	4.3	2.3	996.7
160°	12.3	11.7	9.5	8.1	6.6	5.4	4.1	1.5	998.2
165°	10.0	9.6	7.9	6.6	5.9	4.7	4.5	1.0	999.2
170°	7.8	6.8	5.5	5.6	6.0	4.8	4.8	0.6	999.8
175°	4.9	4.4	4.8	4.8	4.9	4.9	5.2	0.2	1000.0
180°	4.5	4.5	4.5	4.5	4.5	4.5	4.5	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Performance	<b>Order number: 51TD16MN4GXM</b> <b>EAN: 4058352928950</b>	<b>LP number</b> 58519_284
--	--	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.0	22.3	21.6	22.9	23.5	16.6	17.9	17.2	18.4	19.1
	3H	21.9	22.9	22.5	23.6	24.3	17.1	18.3	17.7	18.9	19.6
	4H	22.1	23.1	22.8	23.8	24.5	17.4	18.4	18.0	19.1	19.8
	6H	22.5	23.3	23.1	24.0	24.8	17.6	18.5	18.2	19.2	19.9
	8H	22.7	23.5	23.4	24.2	25.0	17.5	18.5	18.2	19.1	19.9
	12H	23.0	23.7	23.7	24.5	25.3	17.6	18.4	18.2	19.1	19.9
4H	2H	21.0	22.1	21.7	22.7	23.4	17.2	18.2	17.9	18.9	19.6
	3H	22.0	22.8	22.6	23.5	24.3	17.9	18.8	18.6	19.5	20.2
	4H	22.3	23.1	23.0	23.8	24.6	18.3	19.0	19.0	19.7	20.5
	6H	22.8	23.5	23.6	24.2	25.1	18.5	19.2	19.2	19.9	20.8
	8H	23.2	23.8	23.9	24.5	25.4	18.6	19.2	19.3	20.0	20.8
	12H	23.7	24.2	24.5	25.0	25.9	18.6	19.2	19.4	19.9	20.8
8H	4H	22.3	22.9	23.0	23.7	24.5	18.5	19.1	19.3	19.9	20.7
	6H	22.9	23.4	23.7	24.2	25.1	19.0	19.4	19.7	20.2	21.1
	8H	23.4	23.9	24.2	24.7	25.6	19.2	19.6	19.9	20.4	21.3
	12H	24.2	24.5	25.0	25.3	26.3	19.3	19.7	20.1	20.5	21.4
12H	4H	22.2	22.8	23.0	23.5	24.4	18.6	19.1	19.3	19.8	20.7
	6H	22.9	23.4	23.7	24.1	25.0	19.1	19.5	19.9	20.3	21.2
	8H	23.5	23.9	24.3	24.6	25.6	19.4	19.7	20.2	20.5	21.5

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1480</b>	<b>H(C0) = 36</b>	<b>H(C180) = 36</b>
			<b>B = 115</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>


C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
	45°	19590.1	19557.2	21587.5	22039.9	13647.3	10032.3	9813.4	
	50°	17968.3	16918.3	16217.5	16890.4	10592.4	7831.2	7823.3	
	55°	16854.7	15249.8	12682.6	12451.3	8431.6	6511.8	6710.8	
	60°	15071.2	13413.9	10252.7	9241.6	6949.5	5674.9	6058.6	
	65°	12191.4	10943.8	8318.7	7181.1	6017.9	5128.7	5650.1	
	70°	8903.9	8196.0	6666.9	5927.2	5391.3	4720.0	5332.0	
	75°	7228.6	6706.0	5665.9	5221.1	4989.7	4318.9	4920.1	
	80°	7649.1	7116.6	5856.6	4975.4	4803.7	3989.1	4342.3	
	85°	10030.8	9392.1	7686.7	5939.6	4990.8	3870.5	3709.7	

# Photometric test report

<b>Family</b> <b>Licross® 11 Performance</b>	<b>Order number: 51TD16MN4GXM</b> <b>EAN: 4058352928950</b>	<b>LP number</b> <b>58519_284</b>
---	--	--------------------------------------

**Luminance values in cd/m<sup>2</sup>**

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

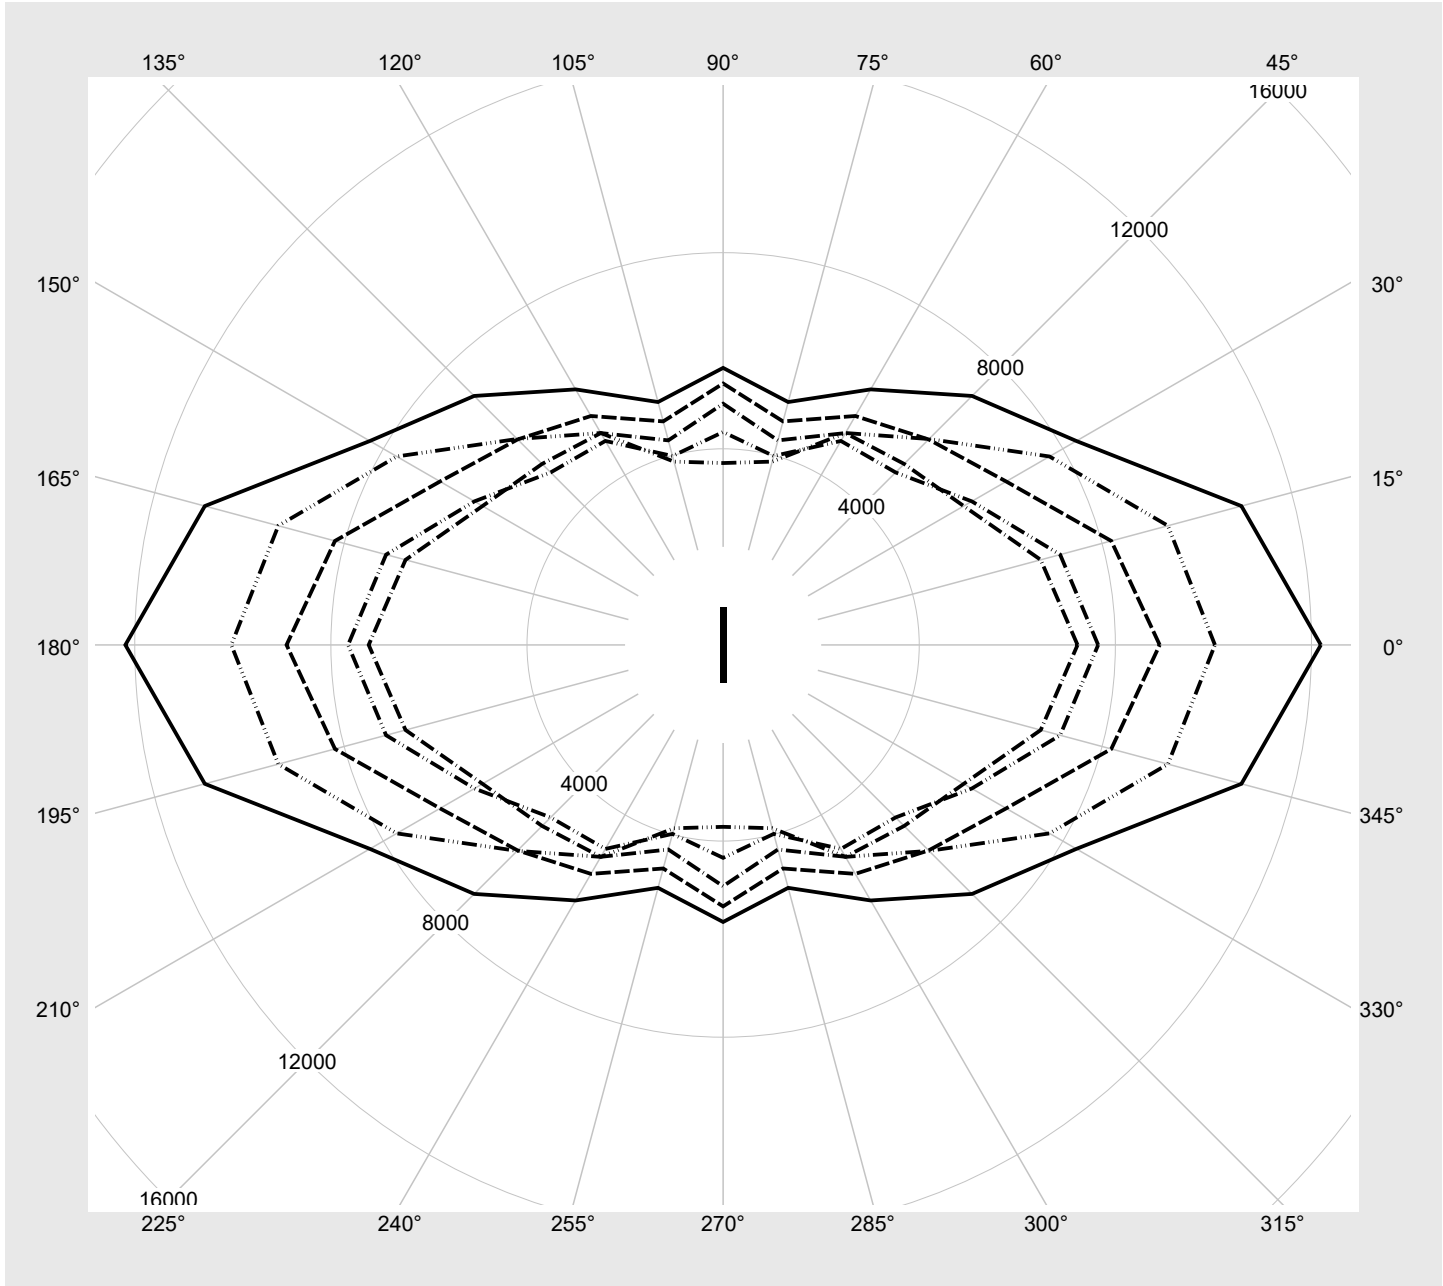

## Photometric test report

Family  
Licross® 11 Performance

Order number: 51TD16MN4GXM  
EAN: 4058352928950

LP number  
58519\_284

### Multilumen Table

environmental temperature: 25°C

siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	16020	87.4
2	A	C	F	15232	82.6
3	A	D	E	14199	76.2
4	A	D	F	13165	70.1
5	B	C	E	12185	64.3
6	B	C	F	11120	58.3
7	B	D	E	10119	52.6
8	B	D	F	9107	47.0