

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE11MN4AXG
EAN: 4058352929117

LP number
58785_347



Version cover frosted, narrow distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 10130 lm
 Power consumption = 55.2 W
 Luminous efficacy = 183.5 lm/W

serial
documentation
11.10.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 2627 cd/klm

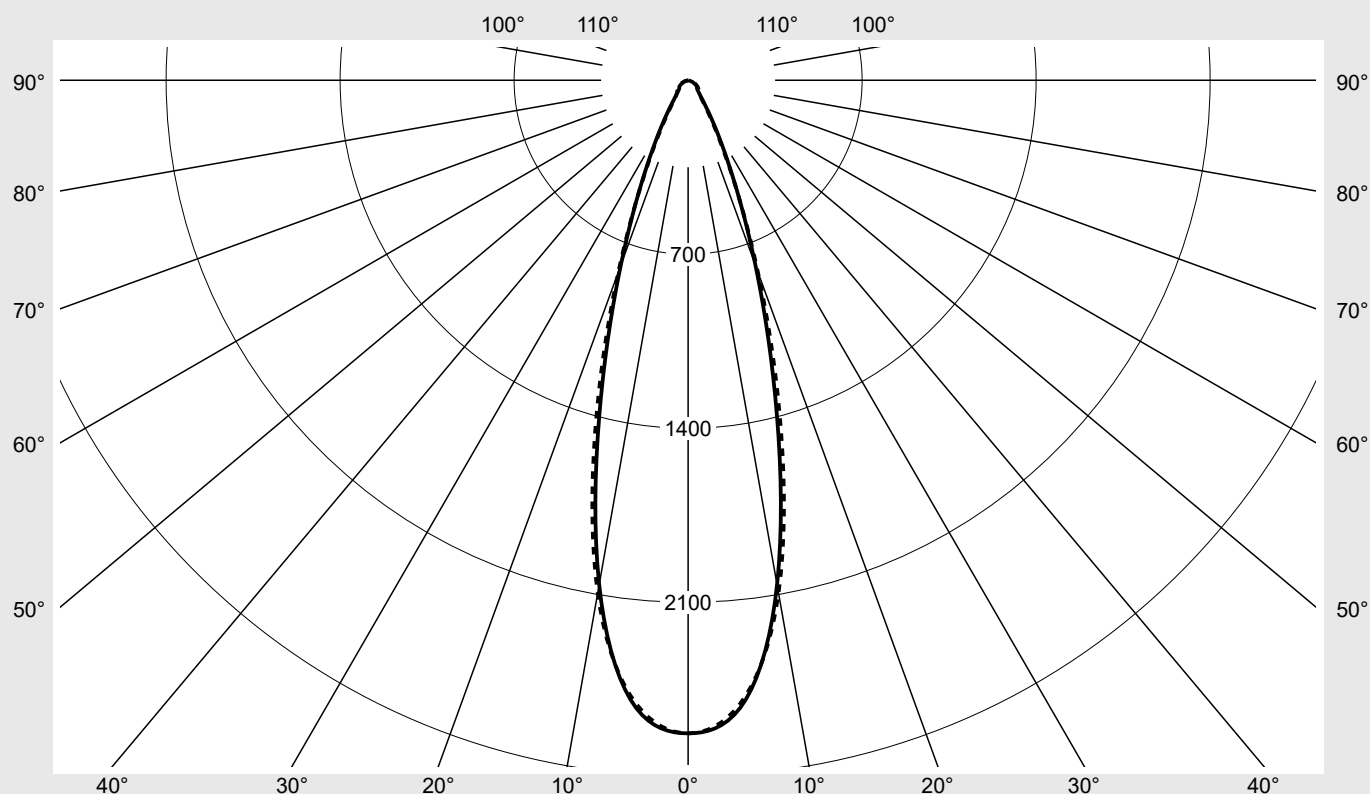

Classifications

DIN 5040 A 7 0
 CIE N1=89 N2=96 N3=99
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE11MN4AXG EAN: 4058352929117	LP number 58785_347
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	15.7	15.7
5°	2520.2	2503.8	2487.8	2499.1	2508.6	2505.8	2505.2	119.6	135.3
10°	2060.7	2047.7	2044.6	2066.8	2086.2	2092.0	2094.5	196.9	332.2
15°	1373.4	1369.0	1375.7	1399.2	1421.9	1432.7	1437.2	198.7	530.9
20°	791.8	790.8	796.4	808.8	818.0	819.0	819.4	151.2	682.1
25°	418.1	420.5	425.4	427.2	423.4	413.4	409.3	97.4	779.6
30°	215.7	218.7	224.8	222.9	213.7	202.3	197.8	58.9	838.4
35°	112.4	114.3	119.3	116.0	107.4	103.1	102.4	35.0	873.4
40°	70.3	69.7	69.6	67.8	65.2	68.3	71.3	24.2	897.6
45°	52.4	50.5	46.9	47.4	48.4	54.1	61.4	19.6	917.2
50°	46.4	44.6	38.1	38.0	38.3	44.7	54.3	17.8	935.0
55°	42.3	42.2	36.7	33.4	32.3	38.6	47.1	17.1	952.1
60°	32.7	32.9	34.3	30.2	28.0	32.6	38.2	15.3	967.4
65°	23.6	23.8	26.4	25.7	24.0	26.1	29.3	12.6	980.0
70°	15.1	15.6	18.2	19.4	18.6	19.5	20.9	9.4	989.4
75°	8.3	8.7	10.8	13.0	12.9	13.2	13.7	6.1	995.5
80°	4.0	4.1	5.0	6.6	7.3	7.2	7.2	3.2	998.7
85°	1.6	1.6	1.9	2.5	2.6	2.7	2.5	1.2	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE11MN4AXG EAN: 4058352929117	LP number 58785_347
--------------------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	15.4	16.5	15.8	16.8	17.1	15.3	16.4	15.7	16.8	17.1
	3H	16.3	17.3	16.7	17.6	18.0	16.7	17.7	17.1	18.0	18.4
	4H	16.6	17.4	16.9	17.8	18.2	17.3	18.1	17.7	18.5	18.9
	6H	16.7	17.4	17.1	17.8	18.2	17.6	18.4	18.0	18.8	19.2
	8H	16.8	17.4	17.2	17.8	18.2	17.8	18.4	18.2	18.8	19.2
	12H	16.8	17.3	17.2	17.7	18.2	17.8	18.4	18.2	18.8	19.2
4H	2H	15.9	16.8	16.3	17.2	17.5	15.8	16.7	16.2	17.1	17.5
	3H	17.0	17.8	17.5	18.2	18.6	17.4	18.1	17.8	18.5	18.9
	4H	17.3	18.0	17.8	18.4	18.8	18.0	18.6	18.4	19.1	19.5
	6H	17.5	18.0	17.9	18.4	18.9	18.4	19.0	18.9	19.4	19.9
	8H	17.5	18.0	18.0	18.4	18.9	18.5	19.0	19.0	19.5	20.0
	12H	17.5	17.9	18.0	18.4	18.9	18.6	19.0	19.1	19.5	20.0
8H	4H	17.6	18.1	18.1	18.5	19.0	18.2	18.7	18.7	19.1	19.6
	6H	17.7	18.1	18.2	18.6	19.1	18.7	19.1	19.2	19.6	20.1
	8H	17.8	18.1	18.3	18.6	19.1	18.8	19.2	19.3	19.7	20.2
	12H	17.8	18.1	18.3	18.6	19.1	18.9	19.2	19.5	19.7	20.3
12H	4H	17.6	18.0	18.1	18.5	19.0	18.2	18.6	18.7	19.0	19.5
	6H	17.8	18.1	18.3	18.6	19.1	18.7	19.0	19.2	19.5	20.0
	8H	17.8	18.1	18.4	18.6	19.2	18.9	19.1	19.4	19.6	20.2

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	180°						
γ	Luminance in cd/m²						
45°	8634.8	8310.7	7720.7	7798.8	7963.9	8915.9	10109.7
50°	8410.5	8081.7	6894.0	6890.0	6934.2	8103.3	9830.1
55°	8593.9	8569.7	7449.5	6774.0	6564.7	7837.7	9552.4
60°	7611.2	7657.8	7986.2	7036.3	6514.9	7580.3	8894.4
65°	6490.0	6562.4	7273.3	7090.9	6615.9	7189.2	8059.9
70°	5143.7	5301.3	6212.7	6590.9	6345.8	6639.9	7117.2
75°	3747.5	3922.0	4856.0	5849.8	5812.4	5928.0	6156.6
80°	2649.9	2744.5	3370.8	4416.8	4886.8	4805.0	4845.9
85°	2161.6	2192.3	2558.4	3317.2	3505.6	3587.1	3287.8

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE11MN4AXG
EAN: 4058352929117

LP number
58785_347

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

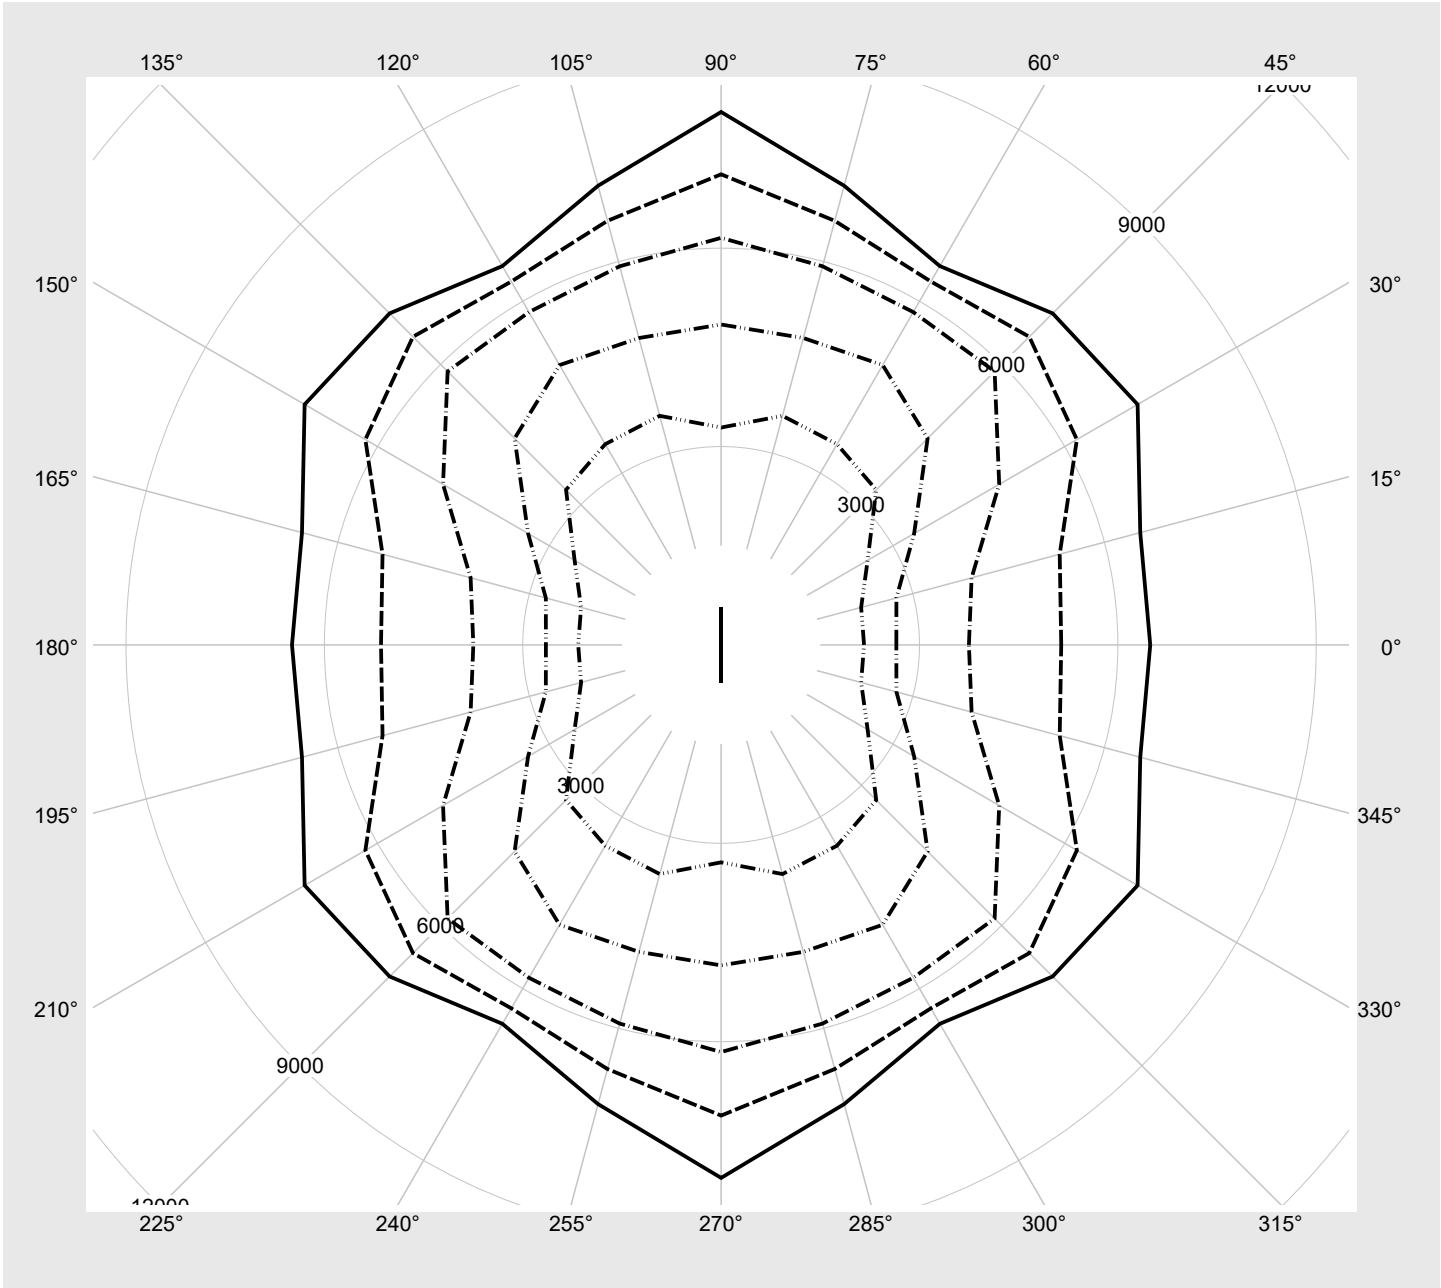

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE11MN4AXG EAN: 4058352929117	LP number 58785_347
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	10130	55.2
2	A	C	F	9690	52.5
3	A	D	E	9160	49.3
4	A	D	F	8640	46.2
5	B	C	E	7880	41.7
6	B	C	F	7650	40.4
7	B	D	E	7110	37.4
8	B	D	F	6650	34.8