

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE12DV4FXGE
EAN: 4058352987469

LP number
58637_224



Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 15360 lm
Power consumption = 84.1 W
Luminous efficacy = 182.6 lm/W

serial
documentation
30.10.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 498 cd/klm

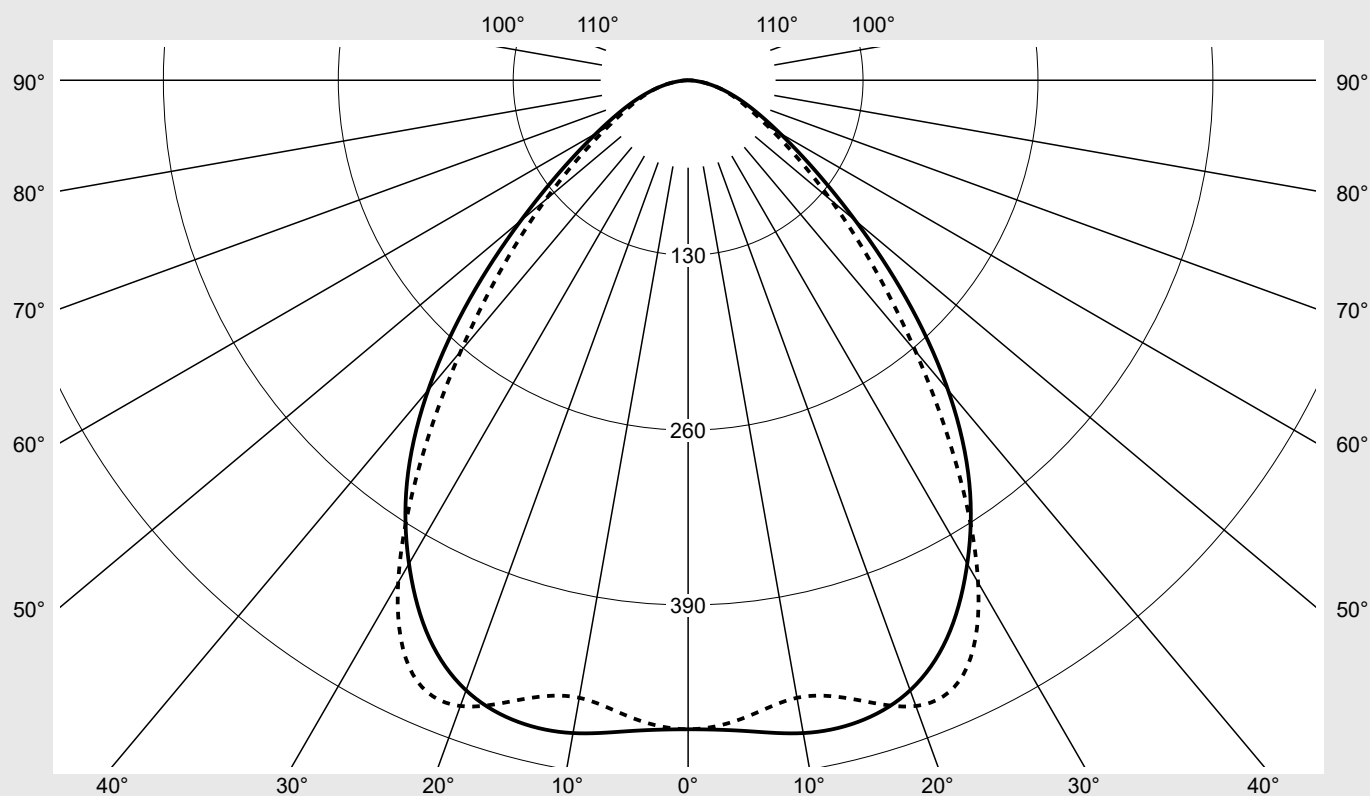

Classifications

DIN 5040 A 5 0
CIE N1=67 N2=92 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DV4FXGE EAN: 4058352987469	LP number 58637_224
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	482.3	482.3	482.3	482.3	482.3	482.3	482.3	2.9	2.9
5°	485.4	482.8	478.2	477.5	477.4	475.9	475.7	22.9	25.8
10°	492.7	488.2	477.9	471.3	467.6	465.9	466.0	45.2	71.0
15°	493.2	486.1	471.9	467.9	471.0	473.7	476.3	67.5	138.5
20°	482.5	473.5	462.5	471.9	487.1	492.8	494.9	89.9	228.4
25°	456.4	447.1	449.2	479.4	497.6	491.1	485.8	109.5	337.8
30°	414.9	406.8	427.0	475.1	479.0	447.1	431.1	121.4	459.2
35°	364.2	358.0	387.7	436.7	420.7	368.9	346.8	122.0	581.2
40°	300.5	296.3	322.5	357.9	336.0	284.8	262.9	110.4	691.6
45°	229.2	226.3	238.5	259.8	247.2	211.8	193.4	90.1	781.7
50°	162.3	159.3	161.6	173.6	174.5	155.2	138.5	68.2	849.9
55°	112.5	108.0	105.1	112.3	121.6	110.9	97.2	49.6	899.5
60°	78.7	73.1	68.3	73.1	83.7	77.4	68.5	35.5	935.0
65°	56.0	50.2	45.0	48.4	56.8	54.5	49.6	25.5	960.5
70°	39.5	34.5	29.5	32.1	37.8	38.5	36.6	18.1	978.6
75°	26.0	22.0	18.4	20.2	23.9	25.9	25.8	12.0	990.6
80°	14.9	12.2	9.9	10.8	13.0	14.8	15.3	6.8	997.4
85°	5.4	4.3	3.6	4.0	4.7	5.6	5.8	2.5	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DV4FXGE EAN: 4058352987469	LP number 58637_224
--------------------------------	---	------------------------

UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	22.7	24.2	23.1	24.5	24.8	22.8	24.3	23.2	24.6	24.9	
	3H	23.2	24.6	23.6	24.9	25.2	23.4	24.7	23.7	25.0	25.4	
	4H	23.5	24.7	23.8	25.0	25.4	23.6	24.8	24.0	25.2	25.5	
	6H	23.6	24.7	24.0	25.1	25.5	23.8	24.9	24.2	25.3	25.7	
	8H	23.7	24.7	24.1	25.1	25.5	23.9	24.9	24.3	25.3	25.7	
	12H	23.7	24.7	24.2	25.1	25.5	23.9	24.9	24.4	25.3	25.7	
4H	2H	22.9	24.2	23.3	24.5	24.9	23.0	24.3	23.4	24.6	25.0	
	3H	23.5	24.6	24.0	25.0	25.4	23.7	24.8	24.2	25.1	25.6	
	4H	23.8	24.7	24.3	25.1	25.6	24.1	25.0	24.5	25.4	25.8	
	6H	24.0	24.8	24.5	25.3	25.7	24.3	25.1	24.8	25.6	26.0	
	8H	24.1	24.8	24.6	25.3	25.8	24.4	25.2	24.9	25.6	26.1	
	12H	24.2	24.8	24.7	25.3	25.8	24.5	25.1	25.0	25.6	26.1	
8H	4H	23.9	24.6	24.4	25.0	25.5	24.1	24.8	24.6	25.3	25.8	
	6H	24.1	24.7	24.6	25.2	25.7	24.5	25.0	25.0	25.5	26.0	
	8H	24.2	24.8	24.7	25.2	25.8	24.6	25.1	25.1	25.6	26.1	
	12H	24.3	24.7	24.8	25.2	25.8	24.7	25.1	25.2	25.6	26.2	
12H	4H	23.9	24.5	24.4	25.0	25.5	24.1	24.7	24.6	25.2	25.7	
	6H	24.2	24.7	24.7	25.1	25.7	24.5	25.0	25.0	25.5	26.0	
	8H	24.3	24.7	24.8	25.2	25.7	24.6	25.0	25.1	25.5	26.1	

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 2250 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	38143.6	37669.5	39700.7	43242.7	41141.7	35261.7	32184.5
50°	29719.0	29176.8	29591.0	31794.9	31958.6	28425.2	25362.3
55°	23081.9	22159.3	21569.2	23053.4	24961.6	22766.8	19941.7
60°	18528.5	17217.6	16083.6	17215.7	19692.6	18212.1	16113.3
65°	15605.7	13969.5	12540.8	13489.7	15821.3	15178.2	13825.0
70°	13588.5	11866.5	10157.8	11045.7	13002.5	13255.1	12606.4
75°	11807.9	10015.7	8382.6	9183.9	10854.3	11790.2	11726.5
80°	10073.7	8254.4	6696.8	7332.6	8780.4	10060.1	10384.1
85°	7225.0	5844.8	4842.8	5381.6	6370.2	7515.4	7828.7

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE12DV4FXGE
EAN: 4058352987469

LP number
58637_224

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

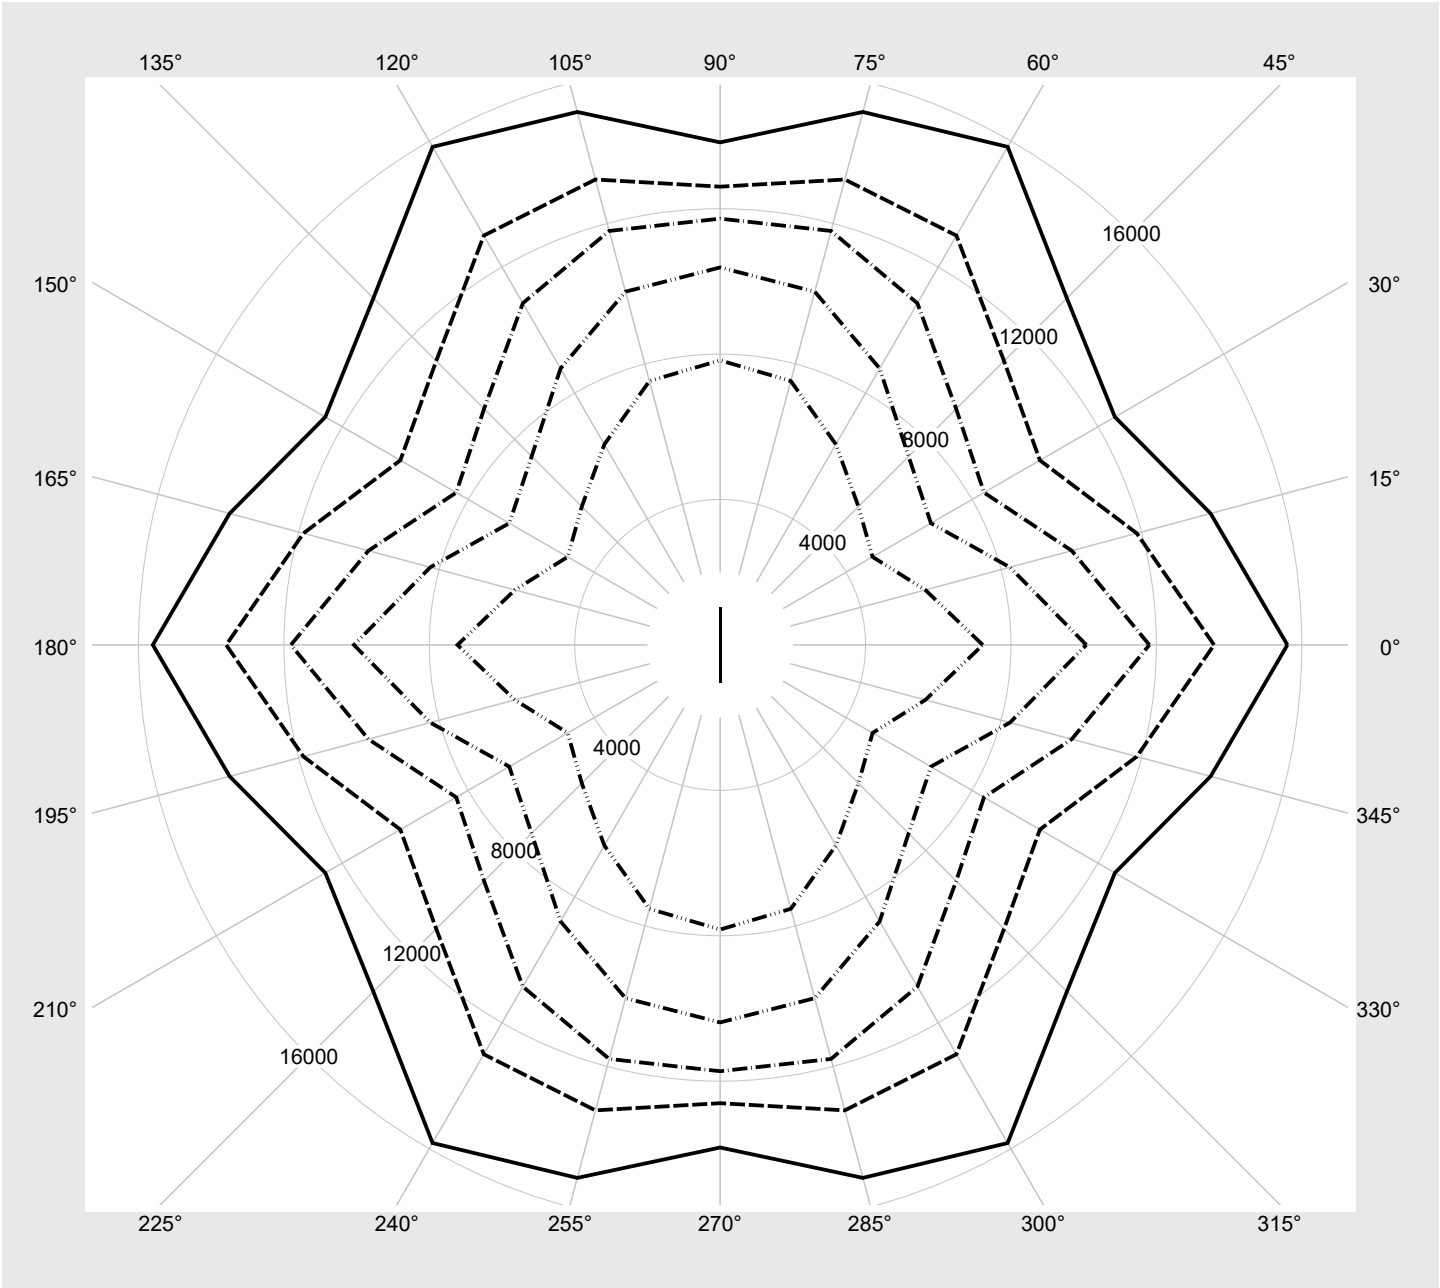

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DV4FXGE EAN: 4058352987469	LP number 58637_224
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15360	84.1
95	240	252	14585	79.4
90	226	250	13797	74.7
85	213	248	13061	70.4
80	199	245	12264	65.7
75	186	243	11512	61.4
70	173	240	10758	57.0
65	160	237	9996	52.7
60	147	234	9226	48.5
55	134	231	8444	44.2
50	121	227	7659	40.0
45	109	223	6928	36.2
40	96	218	6125	32.1
35	84	213	5383	28.2
30	72	208	4632	24.5
25	59	201	3809	20.4
20	47	192	3046	16.4
15	35	181	2276	12.3
10	24	168	1563	8.5
5	12	142	776	4.2
2	4	102	250	1.3