


Photometric test report

Family Floodlight FL11	Order number: 5XA779127T01AA EAN: 4058352017227	LP number 59517_2
	Version standard bracket Optic asymmetric distribution PL33T Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 215350 lm Power consumption = 1540.1 W Luminous efficacy = 139.8 lm/W	serial documentation 24.11.2023
		

Luminous intensity in cd/klm C180-0 C245-65 C250-70 C270-90 **Imax: 1561 cd/klm**

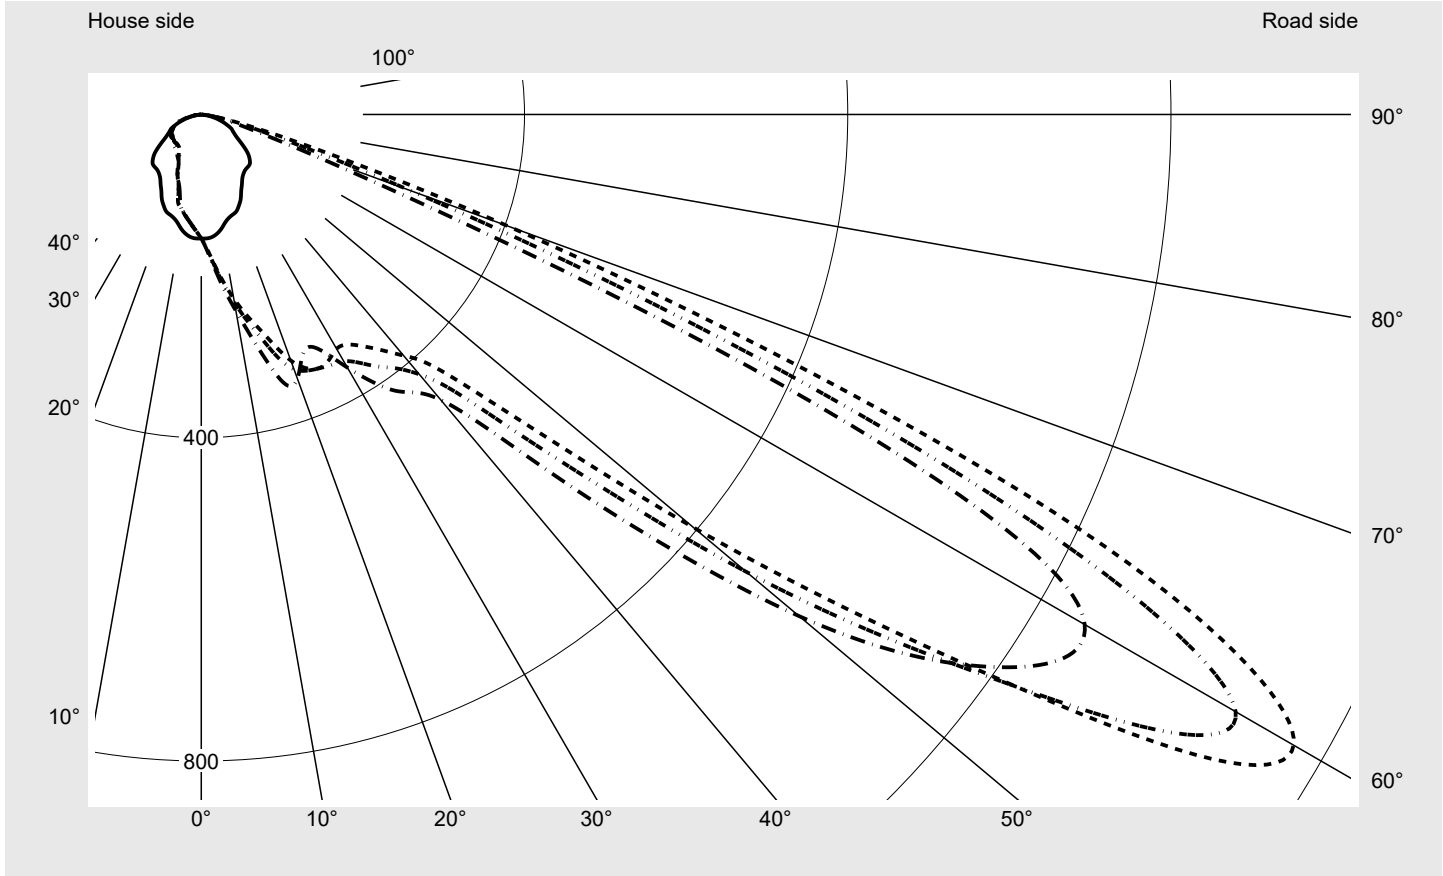


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	438.4
Imax 80°	22.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127T01AA EAN: 4058352017227	LP number 59517_2
---	--	------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

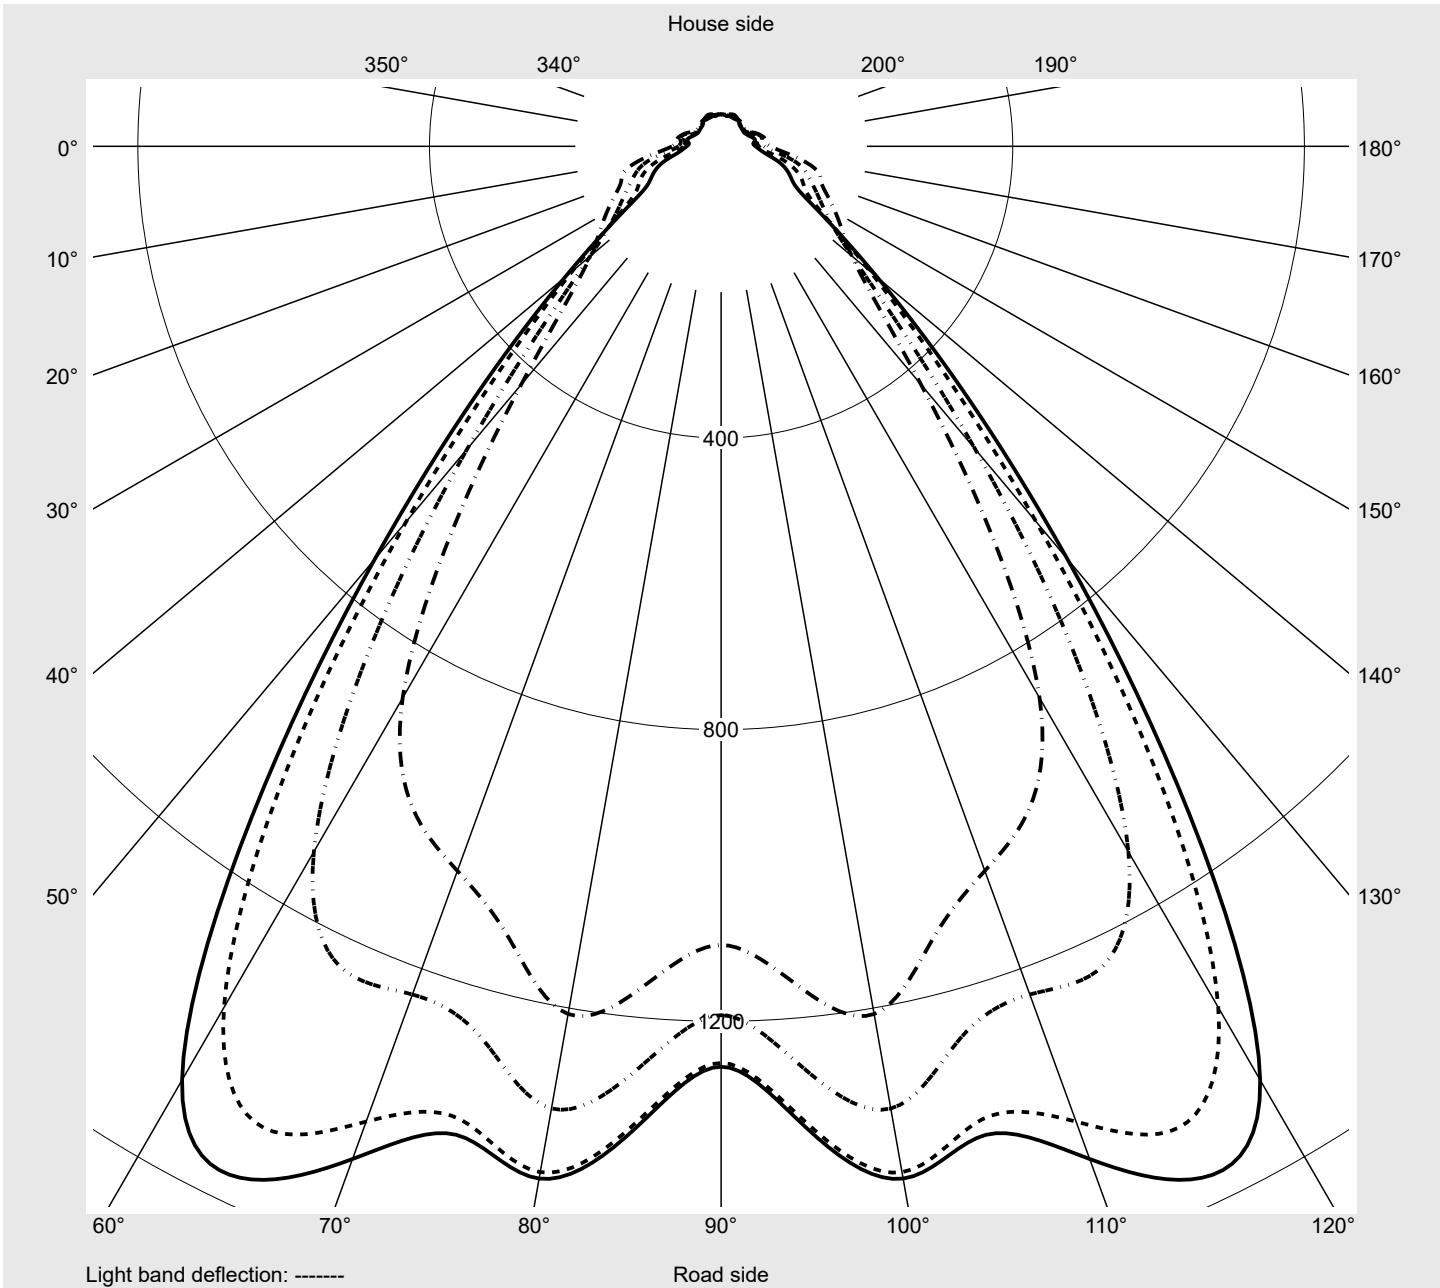

Photometric test report

Family Floodlight FL11	Order number: 5XA779127T01AA EAN: 4058352017227	LP number 59517_2
Table of values for luminous intensities		Maximum luminous intensity
siteco		


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	153.5	154.7	156.0	157.2	158.4	159.5	160.6	161.7	162.7	163.7	164.6	165.4	166.2
5,0°	152.2	154.7	157.5	160.4	163.2	166.0	168.9	171.8	174.6	177.3	179.8	182.2	184.4
7,5°	148.8	152.6	156.9	161.4	165.9	170.6	175.9	180.9	185.9	191.0	196.0	200.7	205.0
10,0°	143.5	148.0	153.6	159.8	166.5	173.4	180.8	188.8	196.8	204.4	211.8	218.7	225.1
12,5°	136.9	142.5	149.3	157.0	165.3	174.6	185.0	195.6	206.1	216.0	225.4	234.7	243.8
15,0°	132.4	139.4	147.4	156.2	165.8	176.6	188.6	201.1	213.3	225.3	237.2	248.9	261.0
17,5°	129.8	138.9	148.6	158.9	170.0	182.1	195.0	207.8	220.7	234.1	248.2	263.6	280.5
20,0°	127.4	138.0	149.7	162.4	175.8	189.2	202.6	216.6	231.7	247.4	265.4	285.7	306.3
22,5°	121.8	134.6	148.8	164.4	179.8	194.7	210.5	229.0	248.6	269.7	291.2	312.3	329.5
25,0°	115.4	128.3	144.2	162.3	179.5	196.7	217.6	241.2	264.8	286.9	307.6	325.1	338.1
27,5°	107.0	120.3	137.3	156.9	176.4	200.1	228.1	254.7	276.7	291.5	303.3	315.3	329.3
30,0°	100.5	112.4	130.0	152.0	177.7	209.2	242.0	270.6	283.9	285.3	286.8	295.9	313.6
32,5°	94.4	106.8	125.8	153.6	186.7	224.7	263.0	287.7	287.8	278.9	276.0	286.6	309.0
35,0°	90.6	102.5	125.1	157.8	197.1	241.6	281.0	294.7	287.3	277.3	277.0	293.5	320.0
37,5°	88.2	102.3	128.5	162.3	205.4	253.8	283.2	285.2	279.0	277.2	283.6	304.3	336.6
40,0°	87.1	102.6	129.4	167.8	212.0	255.2	271.2	268.6	270.6	280.5	293.2	316.4	352.3
42,5°	86.6	103.1	132.1	176.4	217.8	247.4	255.2	255.7	269.9	288.1	304.2	330.1	371.6
45,0°	85.2	102.9	135.1	178.0	211.2	227.5	236.8	250.0	272.6	292.9	312.1	352.6	419.7
47,5°	81.1	101.2	135.7	170.5	193.7	203.3	220.2	242.8	265.2	289.3	324.4	401.1	514.1
50,0°	75.5	96.5	130.7	157.0	169.6	180.7	202.2	225.7	248.3	284.1	357.0	499.5	672.6
52,5°	67.5	85.1	114.4	138.2	146.4	161.2	181.1	203.2	233.8	297.3	426.7	642.1	873.6
55,0°	58.9	70.4	95.7	116.2	129.0	142.9	159.9	185.0	234.4	340.3	541.8	838.2	1117.2
57,5°	51.9	57.8	76.4	97.8	114.3	124.8	140.4	183.1	266.7	417.4	671.9	1032.2	1363.8
60,0°	47.2	53.4	63.8	81.5	96.1	106.8	125.4	179.1	280.4	458.4	738.7	1121.7	1478.7
62,5°	43.7	49.2	55.7	67.7	80.2	91.2	111.0	164.1	263.8	433.5	687.6	1065.2	1453.7
65,0°	40.8	45.0	49.9	59.2	68.7	76.5	91.9	130.2	201.3	339.7	544.8	850.5	1236.6
67,5°	35.3	40.1	43.3	50.2	55.8	59.1	65.1	85.3	130.7	222.0	359.1	551.7	806.5
70,0°	30.2	34.6	38.1	42.9	45.0	44.1	45.3	54.9	81.1	138.7	228.3	341.7	438.4
72,5°	24.5	28.7	32.5	35.0	35.1	34.5	31.8	35.9	51.0	83.4	130.3	190.0	237.4
75,0°	19.4	22.3	25.7	26.9	25.7	26.2	22.6	24.7	33.2	53.0	80.9	114.0	134.8
77,5°	13.6	16.3	18.0	18.2	18.0	19.1	16.4	18.0	23.2	34.4	46.3	54.8	54.6
80,0°	9.1	10.4	11.2	9.6	11.2	12.0	10.2	11.6	13.8	14.2	11.7	12.6	15.7
82,5°	4.9	6.0	5.5	5.0	5.8	6.1	5.5	6.1	6.8	5.9	5.9	6.4	7.8
85,0°	2.1	2.4	2.2	2.2	2.2	2.4	2.2	2.4	2.5	2.5	2.7	2.9	3.2
87,5°	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.9	1.0	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127T01AA EAN: 4058352017227	LP number 59517_2
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	166.9	167.5	167.9	168.2	168.8	168.9	152.6	151.7	150.7	149.8	148.9	148.1	147.4
5,0°	186.3	188.0	189.3	190.2	191.3	191.5	150.2	148.3	146.7	145.1	143.6	142.5	141.5
7,5°	208.8	212.1	214.8	216.7	218.3	218.7	145.9	143.4	141.5	139.7	137.9	136.3	135.0
10,0°	231.0	236.2	240.4	243.5	246.0	246.7	139.5	136.7	134.6	132.5	130.5	129.3	128.3
12,5°	252.8	261.1	268.3	274.0	278.3	279.4	132.5	129.3	126.9	124.7	123.0	122.1	121.4
15,0°	273.5	286.1	297.8	307.8	315.3	317.7	127.1	123.5	120.2	117.9	116.3	115.0	113.5
17,5°	298.5	315.1	329.1	340.6	348.5	351.0	123.1	118.3	114.4	111.7	109.6	107.5	106.4
20,0°	324.0	335.4	341.5	345.2	347.5	347.9	118.7	112.6	108.3	105.2	102.6	100.9	99.8
22,5°	339.9	343.1	339.3	333.0	327.7	325.5	112.5	105.7	100.8	97.4	95.0	93.3	92.6
25,0°	346.1	346.4	339.3	329.1	320.7	317.3	104.8	97.7	92.8	89.5	87.3	85.6	77.4
27,5°	342.4	349.2	346.7	340.0	334.7	332.7	97.3	90.2	85.6	82.6	80.4	72.7	68.0
30,0°	334.8	352.6	361.4	361.9	361.0	361.6	91.0	84.4	80.2	77.6	73.3	64.6	63.0
32,5°	337.6	364.3	380.7	386.5	388.9	391.4	86.7	80.7	76.4	73.9	66.1	61.6	60.0
35,0°	350.3	380.8	400.8	409.8	413.8	417.1	83.0	78.2	74.3	70.9	63.0	60.4	57.6
37,5°	367.8	396.0	417.4	427.0	431.0	433.7	80.3	76.6	73.7	67.3	62.4	58.4	54.4
40,0°	389.5	419.7	441.8	455.1	459.5	461.1	78.4	74.4	72.1	63.9	59.0	55.4	52.1
42,5°	420.8	465.9	501.1	527.7	532.2	532.2	76.3	71.5	68.1	62.2	56.9	53.2	50.4
45,0°	495.0	564.9	622.6	666.4	664.2	658.6	73.9	68.2	63.4	59.3	54.1	50.9	48.8
47,5°	618.4	704.8	777.8	839.5	823.9	808.3	71.2	66.1	60.5	56.2	50.8	47.2	45.6
50,0°	795.0	880.6	957.4	1034.8	999.6	965.7	67.1	64.2	58.3	53.3	47.6	43.8	42.4
52,5°	1001.2	1057.5	1124.3	1208.4	1151.9	1095.4	61.5	60.9	57.0	52.0	45.9	41.6	40.2
55,0°	1239.9	1237.9	1266.8	1340.0	1266.8	1191.7	55.6	56.8	55.7	50.2	44.4	40.0	38.7
57,5°	1485.1	1423.5	1381.8	1428.6	1344.5	1257.2	49.4	51.6	51.0	45.9	41.3	38.5	37.7
60,0°	1560.9	1478.1	1403.6	1437.6	1352.2	1262.3	44.3	47.2	45.2	41.3	38.6	36.8	36.7
62,5°	1443.4	1316.9	1237.3	1277.1	1214.8	1141.6	40.2	43.6	41.2	38.2	38.0	34.7	34.7
65,0°	1162.2	977.8	893.2	903.2	851.1	796.1	35.6	39.6	37.9	35.1	37.7	33.5	32.3
67,5°	745.1	572.2	483.6	445.3	393.9	356.5	31.0	34.3	34.0	32.0	34.0	30.2	29.8
70,0°	403.1	275.5	207.6	185.5	164.2	149.9	27.1	28.2	29.4	27.6	28.2	25.8	26.1
72,5°	188.8	127.1	103.1	92.6	82.9	76.5	22.7	23.9	24.0	22.5	22.0	21.2	21.5
75,0°	91.4	68.9	61.6	56.0	49.6	47.0	17.3	17.3	17.5	17.6	18.7	19.3	17.4
77,5°	45.5	41.6	38.0	36.2	30.1	29.3	11.8	11.7	12.1	13.3	13.4	16.2	13.8
80,0°	20.0	22.0	21.6	21.0	17.8	16.6	7.6	7.9	8.2	8.4	9.1	9.7	8.9
82,5°	9.7	9.9	9.9	10.6	9.1	8.5	4.3	4.8	5.2	5.3	5.3	4.8	4.8
85,0°	3.4	3.5	3.5	3.8	3.7	3.6	2.0	2.2	2.6	2.5	2.5	2.2	2.4
87,5°	1.3	1.3	1.4	1.4	1.5	1.5	0.7	0.7	0.8	0.9	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127T01AA EAN: 4058352017227	LP number 59517_2
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	0.2	0.2
2,5°	146.7	146.1	145.6	145.1	144.8	144.6	144.5	144.2	144.1	144.3	144.3	1.9	2.1
5,0°	140.4	139.4	138.7	138.0	137.6	137.3	137.0	136.8	136.7	136.8	136.8	3.8	5.9
7,5°	133.9	133.0	132.2	131.6	131.0	130.7	130.4	130.2	129.9	130.0	130.0	5.8	11.7
10,0°	127.6	126.9	126.0	125.1	124.4	124.1	123.8	123.5	123.5	123.5	123.5	7.8	19.5
12,5°	120.3	119.5	118.9	118.3	117.8	117.5	117.2	117.1	116.9	117.0	116.9	9.9	29.4
15,0°	112.8	112.0	111.7	111.7	111.9	111.5	109.2	106.3	104.1	102.8	102.3	12.0	41.5
17,5°	105.4	104.8	104.4	100.3	95.6	93.4	92.2	91.6	91.3	91.2	91.3	14.2	55.7
20,0°	99.1	93.9	87.9	86.9	86.8	86.0	85.0	84.2	84.0	84.3	84.4	16.2	71.9
22,5°	84.6	80.6	80.5	80.1	79.0	77.2	75.5	74.4	74.3	74.7	75.0	18.1	90.0
25,0°	74.4	74.2	73.7	72.7	70.7	68.1	65.9	65.0	65.4	66.1	66.2	19.7	109.6
27,5°	67.7	67.3	66.5	65.5	63.5	60.7	58.7	58.5	59.3	60.6	61.8	21.1	130.8
30,0°	62.5	61.8	60.9	59.9	58.2	55.7	54.1	54.0	55.0	57.5	59.1	22.7	153.4
32,5°	59.1	58.1	56.8	55.7	53.9	51.4	50.2	50.6	52.7	54.2	55.1	24.6	178.0
35,0°	55.4	54.0	52.7	51.5	50.2	48.8	48.4	50.2	51.3	52.2	53.5	26.8	204.8
37,5°	52.0	50.9	49.8	49.0	48.3	47.5	48.0	49.5	50.0	51.4	52.7	28.9	233.8
40,0°	49.6	48.7	48.4	47.4	46.9	46.9	47.8	48.7	49.5	50.5	51.9	31.2	264.9
42,5°	47.9	47.0	46.8	46.3	46.9	47.0	47.5	48.1	48.7	50.0	51.3	34.4	299.4
45,0°	47.1	45.9	46.2	46.1	47.1	47.4	47.1	47.3	47.6	48.7	49.8	39.5	338.9
47,5°	45.0	44.4	44.4	45.0	46.0	46.5	46.1	46.2	46.2	46.7	47.5	46.0	384.8
50,0°	42.2	42.4	43.1	44.4	45.1	46.4	46.2	45.9	45.3	45.1	45.5	54.2	439.1
52,5°	39.9	40.9	42.7	43.5	44.4	46.3	46.6	45.5	44.6	44.2	44.4	63.3	502.4
55,0°	38.6	39.7	41.9	42.7	44.3	45.5	46.0	44.6	43.9	43.7	43.7	73.4	575.8
57,5°	37.7	38.8	40.3	42.6	43.6	44.1	44.3	43.7	43.2	44.3	44.2	83.8	659.6
60,0°	37.1	37.8	39.0	41.9	41.9	42.0	42.3	42.8	42.2	43.6	43.8	88.5	748.1
62,5°	35.3	36.0	37.3	38.7	39.6	39.7	40.2	40.6	39.9	40.7	40.9	83.1	831.2
65,0°	32.7	34.0	35.1	35.5	36.2	38.3	38.5	38.9	38.5	37.7	37.8	66.0	897.2
67,5°	30.0	31.7	32.4	32.7	33.6	36.0	36.4	37.5	37.3	36.0	35.7	41.6	938.7
70,0°	26.7	28.8	28.1	29.0	30.7	32.1	33.6	35.6	35.1	34.4	34.3	24.3	963.1
72,5°	22.7	24.0	22.5	23.6	25.5	27.4	29.7	32.1	32.0	31.6	31.5	14.7	977.8
75,0°	17.5	18.2	18.7	19.6	21.2	23.0	25.5	27.2	26.0	23.6	22.4	9.7	987.5
77,5°	13.1	13.8	14.6	15.7	16.8	18.1	20.1	19.5	17.1	16.5	16.4	6.1	993.6
80,0°	8.7	10.1	10.8	11.9	12.2	12.7	13.4	12.7	12.1	12.1	12.0	3.3	996.9
82,5°	5.4	6.5	7.4	8.0	8.4	8.6	8.9	8.6	8.2	8.1	8.1	1.9	998.8
85,0°	2.7	3.4	4.1	4.1	4.2	4.5	4.3	4.1	4.1	4.2	4.3	0.8	999.6
87,5°	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.6	2.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127T01AA EAN: 4058352017227	LP number 59517_2
----------------------------------	--	-----------------------------

Dimming levels table	environmental temperature: 10°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	214033	1527.5
95	238	252	204606	1440.4
90	223	249	194105	1348.1
85	208	247	183387	1256.4
80	193	244	172204	1164.9
75	179	241	161858	1079.7
70	165	238	150854	995.4
65	151	235	139576	911.1
60	138	232	128890	833.2
55	125	228	118031	755.7
50	113	224	107655	684.0
45	101	220	97123	613.2
40	89	216	86360	542.5
35	77	210	75365	472.2
30	66	205	64896	407.7
25	54	197	53628	337.2
20	43	189	43064	274.4
15	32	178	32503	213.5
10	21	163	21371	145.7
5	10	136	10483	76.6
1	3	91	2991	32.4

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
97	244	253	203361	1467.4
95	237	252	198832	1424.3
90	221	249	188176	1326.4
85	206	246	177903	1234.9
80	191	244	167113	1144.2
75	177	241	157178	1059.5
70	163	238	146458	975.6
65	149	235	135637	891.8
60	136	231	125228	814.6
55	123	228	114585	737.8
50	111	224	104462	666.6
45	99	220	94178	596.1
40	87	215	83574	525.9
35	75	209	72860	456.2
30	64	204	62543	392.7
25	53	197	52273	328.5
20	42	188	41886	266.3
15	31	177	31369	206.1
10	21	163	21285	144.2
5	10	136	10455	75.8
1	3	92	2985	32.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779127T01AA EAN: 4058352017227	LP number 59517_2
----------------------------------	--	-----------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	215350.0	1540.1
25.0	204470.0	1478.6