

Photometric test report

Family
DL 11 iQ

Order number: 5XA5565MF108P00022
EAN: 4058352956182

LP number
59375_89

serial
documentation
01.02.2024



Version luminaire insert LED, Siteco® metallic grey (DB 702S), post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 2700 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 4130 lm
 Power consumption = 33.6 W
 Luminous efficacy = 122.9 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 769 cd/klm

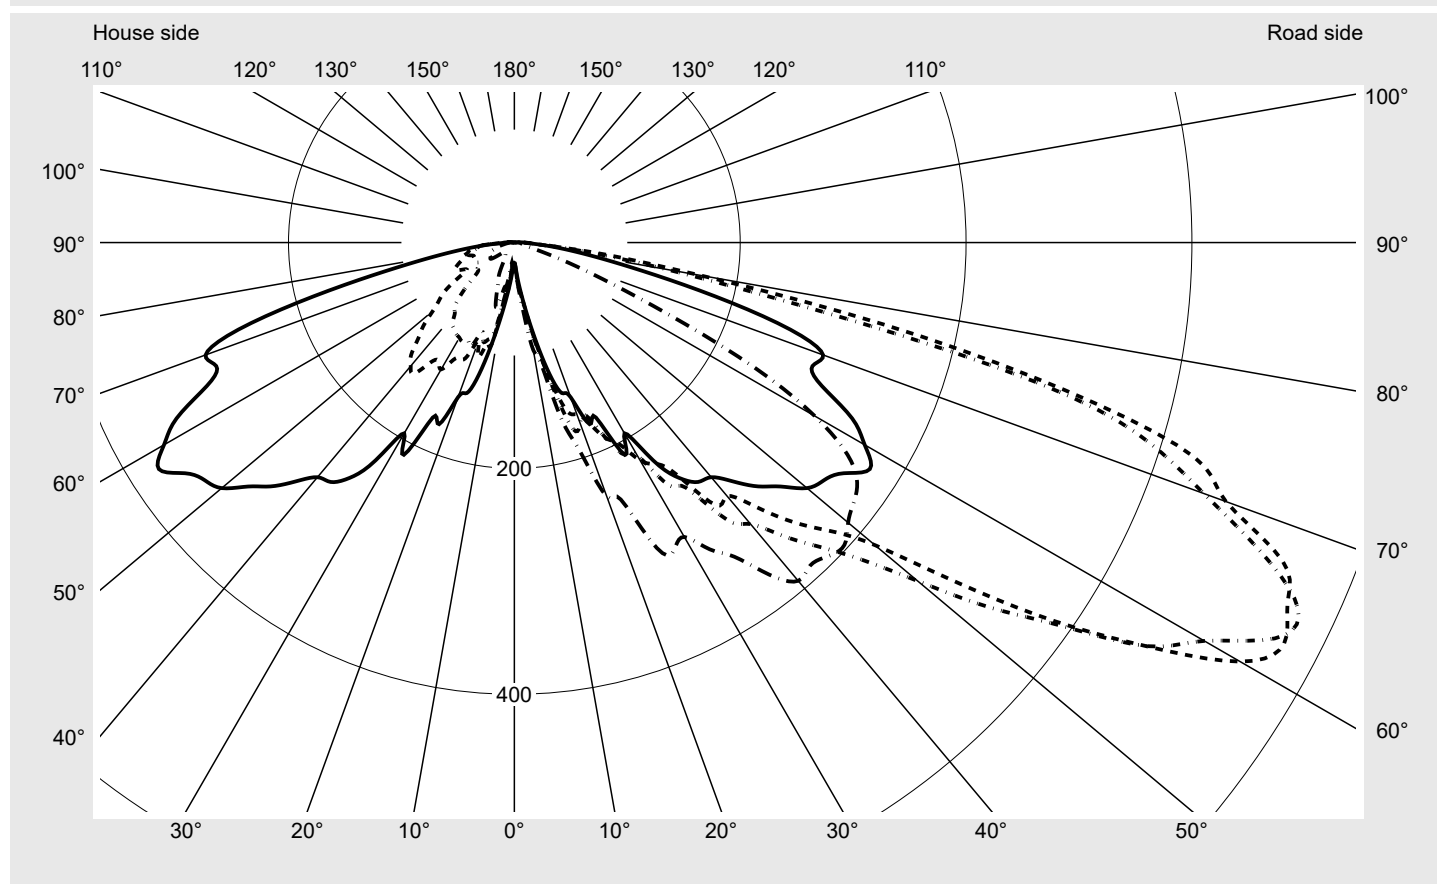

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	98.8%
Eta 90° - 180°	1.2%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	670.6
Imax 80°	166.8
Imax 90°	10.3
Imax >90°	5.5
Imax >95°	4.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
DL 11 iQ

Order number: 5XA5565MF108P00022
EAN: 4058352956182

LP number
59375_89

Envelope curve in cd/klm


KMK 62.5°

KMK 60°

KMK 57.5°

KMK 55°

siteco

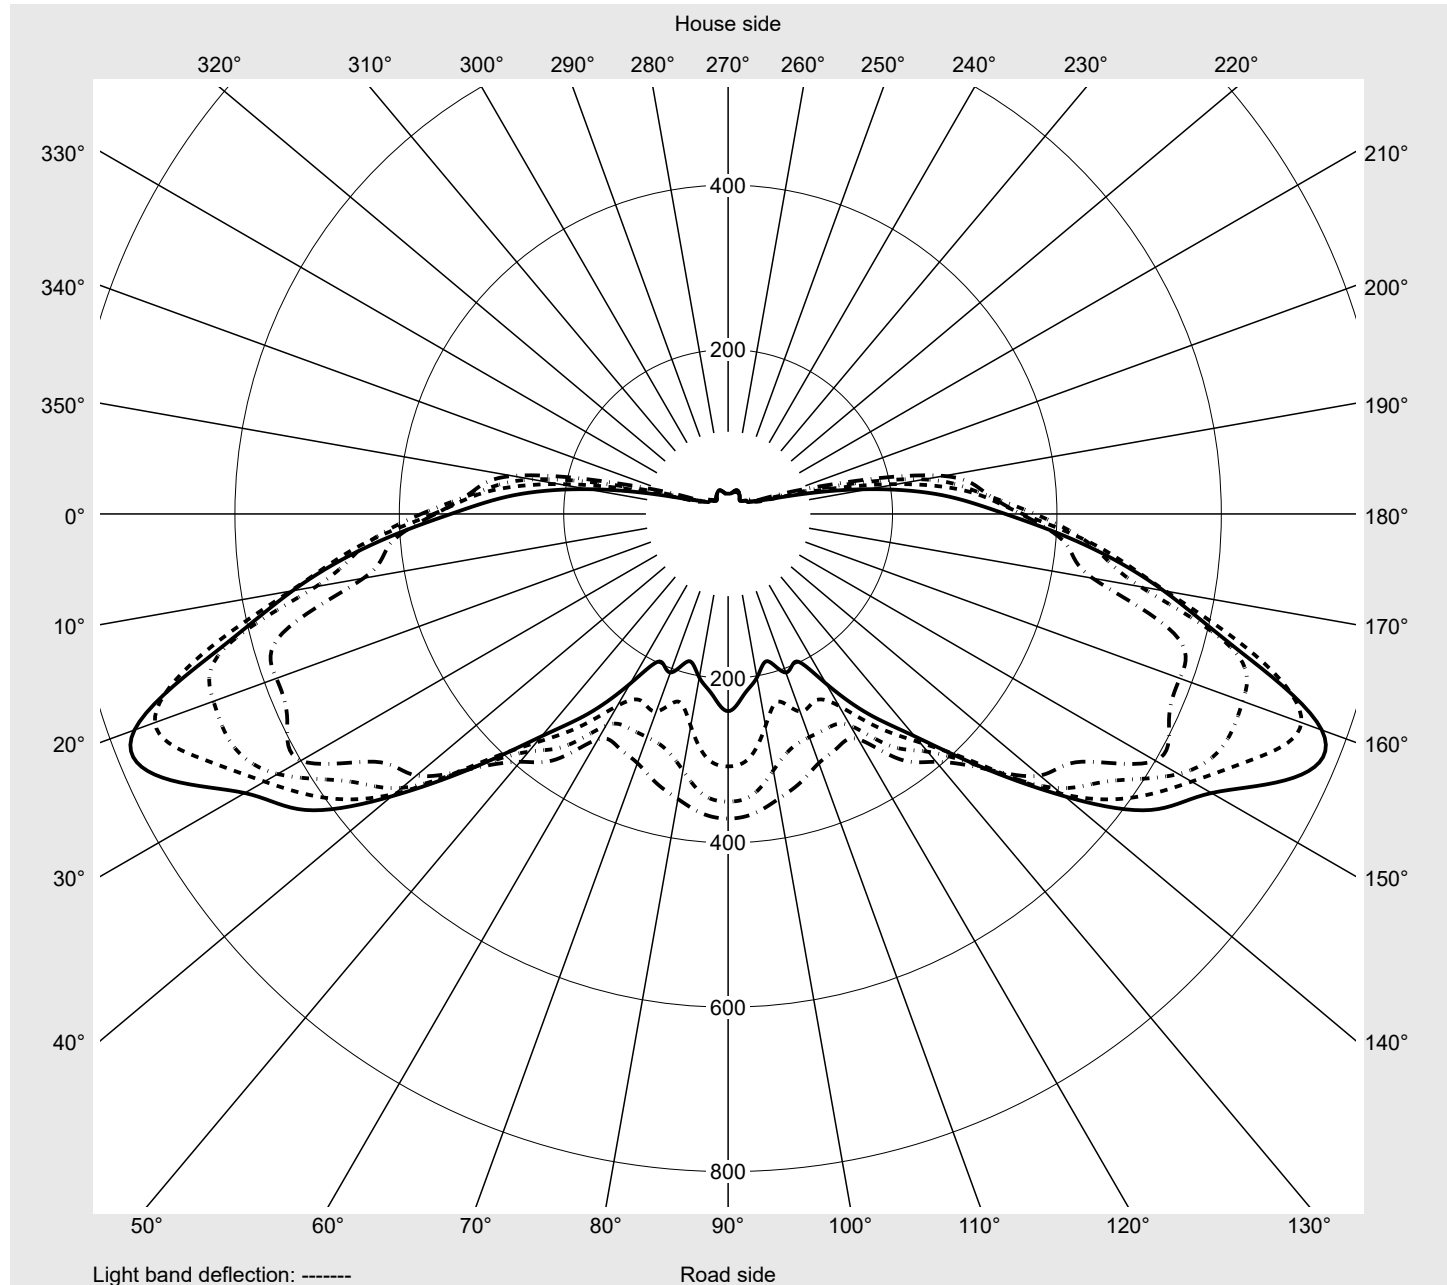

Photometric test report

Family DL 11 iQ	Order number: 5XA5565MF108P00022 EAN: 4058352956182	LP number 59375_89
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1
2,5°	20.5	19.5	19.6	20.2	20.8	21.5	22.2	23.0	22.8	22.6	22.7	22.7	22.4
5,0°	31.2	33.0	35.2	36.8	38.0	38.5	38.0	36.5	36.5	34.9	35.7	36.1	36.9
7,5°	45.2	45.1	45.8	47.8	47.7	48.3	50.4	49.7	49.4	52.0	52.7	53.4	54.4
10,0°	64.6	66.7	67.0	63.5	67.2	72.4	75.5	73.4	76.0	73.8	75.5	78.7	79.8
12,5°	91.1	94.9	94.9	102.6	96.0	97.3	90.6	87.7	84.8	91.6	101.6	107.7	111.3
15,0°	120.9	125.4	152.5	131.3	129.9	134.9	132.9	140.9	144.9	145.5	135.5	131.1	136.7
17,5°	139.7	142.8	153.8	159.8	157.1	173.3	154.7	141.3	140.7	143.7	148.3	151.1	158.5
20,0°	145.7	154.9	159.9	166.6	161.7	170.3	168.5	161.2	162.4	174.0	159.5	164.2	167.0
22,5°	174.1	171.2	179.5	165.1	173.1	165.9	165.4	170.5	182.3	173.1	179.9	195.4	200.6
25,0°	170.9	179.0	188.5	188.9	191.0	190.3	195.4	183.7	188.1	195.8	183.6	194.6	214.1
27,5°	211.9	206.1	196.7	198.6	201.2	211.7	215.5	210.5	209.0	219.6	208.0	211.1	229.1
30,0°	195.1	212.5	233.6	231.3	222.8	217.3	222.0	215.1	224.5	230.2	222.9	220.6	244.4
32,5°	228.6	216.0	203.5	218.0	232.4	255.0	260.8	255.0	271.0	274.9	256.1	255.3	276.0
35,0°	254.4	266.3	272.3	262.1	251.2	265.0	275.3	273.2	278.0	293.6	291.5	274.6	294.4
37,5°	267.2	263.1	260.8	271.7	293.0	309.3	289.8	287.1	299.2	312.6	312.0	297.6	321.7
40,0°	271.3	276.2	274.3	281.0	293.0	325.4	347.9	331.8	324.3	328.7	320.5	307.4	333.2
42,5°	287.0	284.5	287.3	298.0	318.0	352.3	369.2	349.5	350.9	371.7	359.0	328.3	338.4
45,0°	305.4	298.9	309.1	316.9	350.4	380.6	384.3	378.1	378.1	383.9	367.3	335.6	348.8
47,5°	319.7	314.0	338.2	352.1	377.7	414.7	419.2	417.2	399.5	396.0	382.6	353.6	365.0
50,0°	338.3	348.8	377.1	400.8	416.8	466.2	472.2	450.2	425.1	417.4	396.6	363.4	357.0
52,5°	345.7	374.3	422.4	489.1	494.7	530.7	525.6	501.1	451.4	435.7	405.3	373.7	345.0
55,0°	356.1	412.3	450.4	561.6	584.8	591.8	600.2	525.5	495.1	437.5	393.6	364.4	316.3
57,5°	373.3	444.7	509.2	635.5	666.2	665.2	632.8	566.5	518.4	434.8	377.5	344.5	297.3
60,0°	358.2	451.1	540.6	663.7	742.1	705.5	651.2	601.3	529.6	428.9	362.8	316.5	269.6
62,5°	337.3	436.7	538.0	644.0	768.6	759.1	679.0	627.8	534.3	435.0	353.1	296.6	238.4
65,0°	300.4	388.3	534.2	661.6	755.4	765.5	698.4	609.5	519.5	428.4	337.5	280.2	210.8
67,5°	285.7	339.7	496.1	630.1	736.2	715.5	677.5	590.6	494.9	397.3	323.1	259.3	181.3
70,0°	290.9	360.7	477.8	628.0	670.6	649.7	636.9	528.9	440.6	366.8	295.3	228.8	158.0
72,5°	256.2	369.0	419.6	582.0	631.0	589.9	501.1	444.8	365.2	282.3	224.5	174.3	133.9
75,0°	184.2	300.6	381.2	494.0	504.5	480.2	362.2	321.0	229.6	188.2	181.3	164.0	127.5
77,5°	116.8	178.9	256.2	331.5	334.6	268.3	206.8	175.0	148.0	129.3	127.4	121.4	104.7
80,0°	73.4	97.3	132.9	158.7	166.8	137.5	130.6	129.7	102.1	68.2	52.9	41.1	39.7
82,5°	45.3	51.0	62.0	72.8	81.0	66.8	82.8	93.7	66.4	43.1	25.3	18.2	10.9
85,0°	25.6	27.4	25.8	26.5	25.5	31.0	51.1	59.1	39.2	21.2	15.5	11.2	8.5
87,5°	12.1	12.7	13.2	14.5	15.3	15.0	15.2	12.9	11.3	9.2	8.3	7.3	6.5
90,0°	9.0	8.4	8.6	8.8	8.8	8.6	8.6	7.4	6.8	6.2	5.8	5.6	5.5
92,5°	5.3	5.4	5.5	5.5	5.5	5.5	5.4	5.3	5.3	5.1	5.1	4.9	4.9
95,0°	4.5	4.6	4.6	4.6	4.6	4.4	4.4	4.3	4.2	4.2	3.9	3.8	3.7
97,5°	3.8	3.9	4.0	3.9	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.1
100,0°	3.6	3.6	3.6	3.6	3.5	3.4	3.4	3.1	3.1	2.9	2.9	2.9	2.9
102,5°	3.1	3.1	3.1	3.1	3.1	2.9	2.9	2.9	2.7	2.7	2.7	2.6	2.5
105,0°	2.9	2.9	2.9	2.9	2.8	2.7	2.7	2.5	2.5	2.5	2.5	2.2	2.2
107,5°	2.7	2.7	2.7	2.7	2.6	2.5	2.5	2.2	2.2	2.2	2.2	2.0	2.0
110,0°	2.5	2.5	2.5	2.5	2.4	2.2	2.2	2.1	2.0	2.0	2.0	2.0	2.0
112,5°	2.4	2.4	2.2	2.2	2.1	2.1	2.0	2.0	2.0	1.9	1.8	1.8	1.8

Photometric test report

Family DL 11 iQ	Order number: 5XA5565MF108P00022 EAN: 4058352956182	LP number 59375_89
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1
2,5°	22.3	22.6	22.8	23.1	23.2	23.3	19.8	19.6	19.8	20.0	20.2	20.3	20.0
5,0°	37.3	37.8	38.9	39.2	39.6	39.5	28.3	25.0	23.6	21.7	18.9	18.7	18.9
7,5°	56.5	58.0	58.7	61.7	62.6	62.6	43.2	42.1	43.4	43.0	40.7	36.1	34.3
10,0°	83.1	85.7	87.3	91.4	95.8	96.7	61.7	51.5	51.1	47.9	47.8	47.4	48.0
12,5°	116.0	113.4	109.3	108.8	109.5	110.2	88.8	99.4	89.3	91.5	80.8	80.2	68.5
15,0°	131.8	132.2	141.0	151.8	156.1	162.5	107.3	94.6	90.0	92.7	88.8	87.3	79.8
17,5°	166.2	184.3	199.0	201.1	193.5	194.4	128.2	117.5	108.4	106.4	91.8	78.7	73.8
20,0°	174.4	188.8	217.5	245.4	247.2	239.3	125.6	122.1	105.5	92.0	84.1	78.1	71.7
22,5°	209.5	225.4	249.0	257.1	254.3	246.2	170.9	153.2	132.8	108.9	99.2	74.2	57.4
25,0°	235.2	247.1	268.8	296.2	300.3	298.3	166.3	166.8	148.6	113.4	96.2	71.8	49.4
27,5°	247.2	253.3	284.5	301.7	304.9	306.6	183.5	159.4	140.2	117.2	98.8	79.9	45.0
30,0°	269.2	274.1	297.2	304.6	299.3	301.0	202.9	197.5	172.1	129.6	97.3	66.9	38.4
32,5°	290.6	294.5	310.1	317.6	318.6	322.1	220.2	192.4	166.9	124.7	96.0	59.0	35.7
35,0°	309.0	322.0	336.4	339.4	337.9	339.6	247.0	218.7	181.8	129.7	92.9	53.2	34.5
37,5°	334.8	355.3	357.1	358.4	361.6	370.6	252.9	224.1	183.2	146.3	90.0	51.9	36.3
40,0°	350.3	374.0	365.8	368.8	375.6	391.0	259.4	240.3	179.1	142.8	82.0	47.9	36.9
42,5°	356.8	374.1	369.2	375.9	382.4	387.9	275.8	244.7	179.3	135.5	78.6	44.0	38.8
45,0°	368.8	378.8	372.4	382.8	389.3	392.8	296.4	256.3	182.6	120.5	69.4	44.6	41.3
47,5°	379.1	373.2	378.9	392.6	395.5	396.4	303.5	258.6	178.6	109.3	57.0	44.9	41.6
50,0°	371.4	360.8	367.2	382.6	386.3	385.9	306.8	262.5	169.8	94.2	45.0	41.3	37.4
52,5°	350.6	345.7	358.5	368.1	379.7	378.7	306.4	267.6	162.2	83.9	40.2	36.7	33.2
55,0°	314.1	322.6	338.6	352.1	365.6	370.6	312.2	266.3	149.4	75.3	39.7	33.6	30.4
57,5°	287.2	288.9	295.6	316.8	343.0	349.9	305.3	242.1	126.7	60.6	36.7	31.0	28.2
60,0°	250.6	255.8	236.2	261.9	297.9	307.1	298.2	209.1	106.2	48.9	35.2	29.7	28.1
62,5°	198.0	205.3	185.4	202.0	220.6	240.0	261.6	173.5	93.4	52.0	38.0	28.7	27.5
65,0°	165.0	153.0	129.3	144.6	156.0	150.6	222.4	145.5	91.8	57.6	37.7	30.4	28.6
67,5°	136.1	105.8	75.9	85.2	88.9	85.3	201.1	132.5	87.0	55.7	37.1	32.3	29.1
70,0°	112.6	75.6	42.1	36.6	39.3	45.1	193.2	131.9	83.7	51.5	37.9	32.4	29.3
72,5°	93.0	45.0	24.1	17.2	16.2	17.3	170.4	131.1	82.2	48.0	38.3	32.0	29.0
75,0°	71.0	20.3	14.7	11.4	10.9	10.6	129.3	97.1	74.1	46.9	42.4	34.7	31.0
77,5°	32.7	12.9	10.0	8.8	8.6	8.5	78.5	64.8	62.7	42.4	39.4	35.6	31.4
80,0°	11.4	8.6	7.6	7.4	7.3	7.2	58.6	56.5	51.7	40.1	35.4	33.8	30.5
82,5°	8.1	6.8	6.4	6.2	6.2	6.1	42.9	41.9	38.4	32.8	32.2	31.2	28.8
85,0°	6.7	6.2	5.8	5.5	5.4	5.4	23.9	25.8	27.5	28.6	29.0	27.7	24.9
87,5°	5.9	5.5	5.2	4.8	4.6	4.5	11.6	11.8	11.8	13.6	14.8	16.5	15.9
90,0°	5.3	5.1	4.8	4.4	4.3	4.0	8.6	8.4	8.3	8.5	9.5	10.3	8.4
92,5°	4.8	4.6	4.4	3.9	3.8	3.8	5.3	5.2	5.1	4.9	4.8	4.8	4.7
95,0°	3.6	3.5	3.4	3.4	3.4	3.4	4.4	4.4	4.2	4.2	4.0	3.9	3.8
97,5°	3.1	3.1	3.1	3.0	2.9	2.9	3.8	3.8	3.6	3.5	3.5	3.3	3.3
100,0°	2.7	2.7	2.7	2.7	2.7	2.7	3.4	3.4	3.3	3.3	3.1	3.0	3.0
102,5°	2.5	2.5	2.5	2.5	2.5	2.5	3.1	3.1	2.9	2.9	2.9	2.8	2.8
105,0°	2.2	2.2	2.2	2.2	2.2	2.2	2.9	2.8	2.7	2.7	2.7	2.6	2.6
107,5°	2.0	2.0	2.0	2.0	2.0	2.0	2.7	2.6	2.5	2.5	2.5	2.5	2.4
110,0°	2.0	2.0	2.0	2.0	2.0	2.0	2.5	2.5	2.4	2.2	2.2	2.2	2.4
112,5°	1.8	1.8	1.8	1.8	1.8	1.8	2.4	2.2	2.2	2.2	2.2	2.2	2.2

Photometric test report

Family DL 11 iQ				Order number: 5XA5565MF108P00022 EAN: 4058352956182								LP number 59375_89		
Table of values for luminous intensities												Maximum luminous intensity		siteco
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone	
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm		
0,0°	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	0.0	0.0	
2,5°	20.1	20.4	20.8	20.7	20.5	20.7	21.4	22.3	22.8	22.9	22.9	0.3	0.3	
5,0°	20.0	20.8	21.4	21.5	21.7	21.9	21.9	22.3	22.8	23.2	23.3	0.7	1.0	
7,5°	31.0	31.6	36.7	36.1	35.4	31.9	27.6	23.8	21.2	19.5	19.1	1.5	2.5	
10,0°	48.6	43.4	43.8	46.7	44.7	38.9	37.3	37.8	36.7	36.7	37.9	2.9	5.5	
12,5°	59.8	61.6	65.4	68.8	62.0	56.3	52.0	45.9	43.2	43.0	41.1	5.0	10.5	
15,0°	75.1	66.6	65.0	67.2	65.1	58.6	56.0	51.2	51.3	57.6	58.1	7.6	18.0	
17,5°	70.9	66.4	63.7	64.9	59.9	52.5	54.2	56.7	51.6	54.7	54.5	9.9	28.0	
20,0°	61.8	56.6	56.5	56.6	54.2	52.4	44.6	44.7	38.6	43.7	44.4	11.8	39.7	
22,5°	48.4	44.2	43.9	43.8	41.4	39.8	35.8	35.4	32.8	34.6	36.6	14.1	53.8	
25,0°	38.3	35.6	34.2	32.9	31.4	31.2	29.9	29.0	29.3	33.4	32.5	16.5	70.3	
27,5°	36.4	32.1	29.5	28.1	27.3	26.0	27.3	23.5	23.2	24.5	25.1	18.9	89.2	
30,0°	33.6	30.2	28.1	26.7	24.6	23.1	22.8	19.5	18.0	18.6	18.4	21.5	110.7	
32,5°	32.5	30.3	28.1	26.0	23.6	21.0	19.5	17.6	15.5	15.3	15.5	24.7	135.4	
35,0°	31.8	29.1	27.0	24.5	21.7	19.1	17.7	15.9	14.3	13.8	13.9	28.6	164.0	
37,5°	33.1	28.5	25.3	23.3	21.3	18.6	16.7	15.0	13.5	12.7	13.0	32.2	196.1	
40,0°	33.4	30.0	24.9	22.0	19.4	17.6	16.0	14.6	13.2	12.5	12.6	35.5	231.6	
42,5°	35.0	29.7	24.8	22.2	18.9	16.9	15.4	14.0	12.9	12.2	12.1	38.8	270.4	
45,0°	36.4	29.9	24.5	21.0	18.5	17.2	15.5	13.9	12.7	11.8	11.7	42.2	312.7	
47,5°	35.5	29.2	23.9	21.9	20.3	18.5	16.7	14.7	12.9	11.7	11.4	45.9	358.5	
50,0°	32.1	26.5	22.7	23.0	23.8	22.8	21.2	19.4	17.1	15.4	15.0	49.5	408.0	
52,5°	28.6	24.2	22.3	24.5	26.0	25.8	25.3	24.5	22.6	20.8	20.4	53.6	461.6	
55,0°	26.7	23.7	22.3	24.9	27.4	28.3	28.3	27.3	25.5	24.9	25.1	57.1	518.6	
57,5°	25.7	23.8	22.8	25.0	27.3	29.0	29.9	28.5	26.0	24.9	25.1	59.6	578.2	
60,0°	24.9	22.4	21.8	24.8	27.8	30.0	30.4	28.7	26.3	24.8	24.7	60.1	638.3	
62,5°	24.7	22.6	21.8	23.9	27.3	29.6	30.9	28.7	25.9	24.8	24.7	58.9	697.2	
65,0°	25.6	23.2	22.3	23.2	25.5	27.3	29.2	27.5	24.9	24.9	24.7	56.5	753.8	
67,5°	26.3	23.9	23.8	23.6	24.8	25.6	26.4	24.8	22.7	21.9	22.2	52.7	806.5	
70,0°	27.8	25.0	24.6	23.1	22.6	22.6	21.9	21.4	20.7	20.2	20.9	49.1	855.6	
72,5°	27.0	26.2	24.6	22.9	20.8	18.9	18.1	17.5	17.3	17.5	17.7	43.1	898.6	
75,0°	28.6	25.8	24.0	22.2	18.4	15.0	15.0	15.0	15.0	15.2	15.3	34.6	933.3	
77,5°	28.6	26.4	23.1	20.7	15.0	11.8	12.0	12.1	12.6	12.8	12.6	23.1	956.4	
80,0°	26.9	24.2	22.6	17.6	13.1	9.3	9.4	9.7	10.0	10.1	9.7	13.8	970.2	
82,5°	26.5	21.9	19.6	14.8	11.8	7.4	7.5	7.6	7.7	8.1	7.6	8.6	978.8	
85,0°	20.9	18.3	15.2	11.1	9.1	6.2	6.2	6.3	6.3	6.4	5.8	5.3	984.1	
87,5°	13.2	12.6	10.7	8.1	6.4	5.5	5.3	5.2	5.3	5.5	4.7	2.7	986.8	
90,0°	7.4	7.2	6.7	5.8	5.3	4.8	4.8	4.7	4.6	4.8	4.3	1.9	988.7	
92,5°	4.7	4.7	4.6	4.5	4.4	4.3	4.2	4.2	3.9	4.0	3.6	1.3	990.0	
95,0°	3.8	3.7	3.7	3.5	3.4	3.3	3.1	3.0	2.9	2.8	2.5	1.0	991.1	
97,5°	3.3	3.3	3.0	2.9	2.8	2.8	2.7	2.6	2.5	2.5	2.2	0.9	992.0	
100,0°	2.9	2.8	2.8	2.7	2.7	2.6	2.4	2.4	2.2	2.2	2.0	0.8	992.8	
102,5°	2.7	2.6	2.6	2.5	2.5	2.4	2.2	2.1	2.0	2.0	2.0	0.7	993.5	
105,0°	2.6	2.6	2.5	2.4	2.2	2.1	2.1	2.0	2.0	1.9	1.8	0.7	994.1	
107,5°	2.4	2.4	2.2	2.2	2.1	2.1	2.0	1.9	1.8	1.8	1.8	0.6	994.7	
110,0°	2.2	2.2	2.2	2.1	2.0	2.0	1.9	1.8	1.8	1.8	1.8	0.6	995.3	
112,5°	2.2	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.8	1.8	1.6	0.5	995.8	

Photometric test report

Family DL 11 iQ	Order number: 5XA5565MF108P00022 EAN: 4058352956182	LP number 59375_89
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	2.2	2.2	2.2	2.1	2.1	2.0	2.0	1.8	1.8	1.8	1.8	1.8	1.8
117,5°	2.1	2.2	2.1	2.0	2.0	1.9	1.8	1.8	1.8	1.6	1.6	1.6	1.6
120,0°	2.1	2.1	2.0	2.0	1.9	1.8	1.8	1.7	1.6	1.6	1.6	1.6	1.6
122,5°	2.0	2.0	1.9	1.9	1.8	1.7	1.6	1.6	1.6	1.6	1.6	1.6	1.6
125,0°	2.0	1.9	1.9	1.8	1.7	1.6	1.6	1.6	1.6	1.5	1.3	1.3	1.3
127,5°	1.8	1.8	1.7	1.6	1.6	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3
130,0°	1.6	1.6	1.6	1.5	1.3	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.1
132,5°	1.5	1.3	1.3	1.3	1.2	1.1	1.1	1.1	1.1	1.0	0.9	0.9	0.9
135,0°	1.3	1.3	1.3	1.2	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.9
137,5°	1.3	1.2	1.1	1.1	1.1	1.1	1.0	0.9	0.9	0.9	0.9	0.9	0.9
140,0°	1.1	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8
142,5°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8
145,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7
147,5°	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565MF108P00022 EAN: 4058352956182	LP number 59375_89
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	1.8	1.8	1.8	1.8	1.8	1.8	2.2	2.2	2.2	2.2	2.2	2.2	2.2
117,5°	1.6	1.6	1.6	1.7	1.6	1.6	2.2	2.2	2.2	2.2	2.2	2.2	2.2
120,0°	1.6	1.6	1.6	1.6	1.6	1.6	2.1	2.1	2.1	2.1	2.1	2.1	2.1
122,5°	1.5	1.6	1.5	1.6	1.6	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0
125,0°	1.3	1.3	1.3	1.3	1.3	1.3	2.0	2.0	2.0	2.0	2.0	2.0	2.0
127,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.8	1.9	1.9	2.0
130,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.7	1.7	1.8	1.8	1.8	1.8	1.8
132,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.6	1.6	1.6	1.6	1.6	1.6	1.6
135,0°	0.9	0.9	0.9	0.9	0.9	0.9	1.5	1.6	1.6	1.6	1.6	1.6	1.6
137,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.3	1.3	1.3	1.3	1.3	1.3	1.5
140,0°	0.8	0.9	0.9	0.8	0.9	0.7	1.1	1.1	1.1	1.1	1.3	1.3	1.3
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.1	1.1	1.1	1.1	1.1	1.1	1.3
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.0	1.0	1.1	1.1	1.1	1.1
147,5°	0.6	0.6	0.6	0.6	0.4	0.4	0.9	0.9	0.9	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565MF108P00022 EAN: 4058352956182	LP number 59375_89
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	2.2	2.2	2.2	2.1	2.0	1.9	1.9	1.8	1.8	1.8	1.8	0.5	996.3
117,5°	2.1	2.1	2.0	2.0	2.0	1.9	1.8	1.8	1.8	1.7	1.8	0.5	996.7
120,0°	2.1	2.1	2.0	2.0	2.0	1.9	1.8	1.7	1.6	1.6	1.6	0.4	997.2
122,5°	2.0	2.0	2.0	2.0	1.9	1.8	1.8	1.6	1.6	1.6	1.6	0.4	997.6
125,0°	2.0	2.0	2.0	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.6	0.4	998.0
127,5°	1.9	1.9	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.6	1.6	0.3	998.3
130,0°	1.8	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.5	1.6	1.6	0.3	998.6
132,5°	1.6	1.7	1.6	1.6	1.6	1.6	1.6	1.5	1.3	1.3	1.3	0.3	998.9
135,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.3	1.3	1.3	1.3	0.2	999.1
137,5°	1.6	1.5	1.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.4
140,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.1	1.1	1.1	0.2	999.6
142,5°	1.3	1.3	1.3	1.2	1.3	1.1	1.1	1.1	1.1	1.1	1.1	0.2	999.7
145,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.1	999.9
147,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.1	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565MF108P00022 EAN: 4058352956182	LP number 59375_89
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	4130	33.6	35.9	34.8
95	241	252	3919	31.3	33.5	32.4
90	229	250	3724	29.4	31.4	30.4
85	216	248	3512	27.3	29.2	28.2
80	203	246	3301	25.4	27.1	26.2
75	190	243	3089	23.5	25.1	24.3
70	178	241	2894	21.9	23.3	22.6
65	165	238	2683	20.1	21.4	20.8
60	152	235	2471	18.4	19.5	19.0
55	140	232	2276	16.8	17.9	17.4
50	127	229	2065	15.2	16.2	15.7
45	114	225	1854	13.6	14.5	14.0
40	102	221	1659	12.2	13.0	12.6
35	89	216	1447	10.7	11.3	11.0
30	76	210	1236	9.2	9.7	9.4
25	63	203	1024	7.8	8.2	8.0
20	51	195	829	6.6	6.9	6.8
15	38	184	618	5.2	5.5	5.4
11	28	173	455	4.1	4.4	4.2