
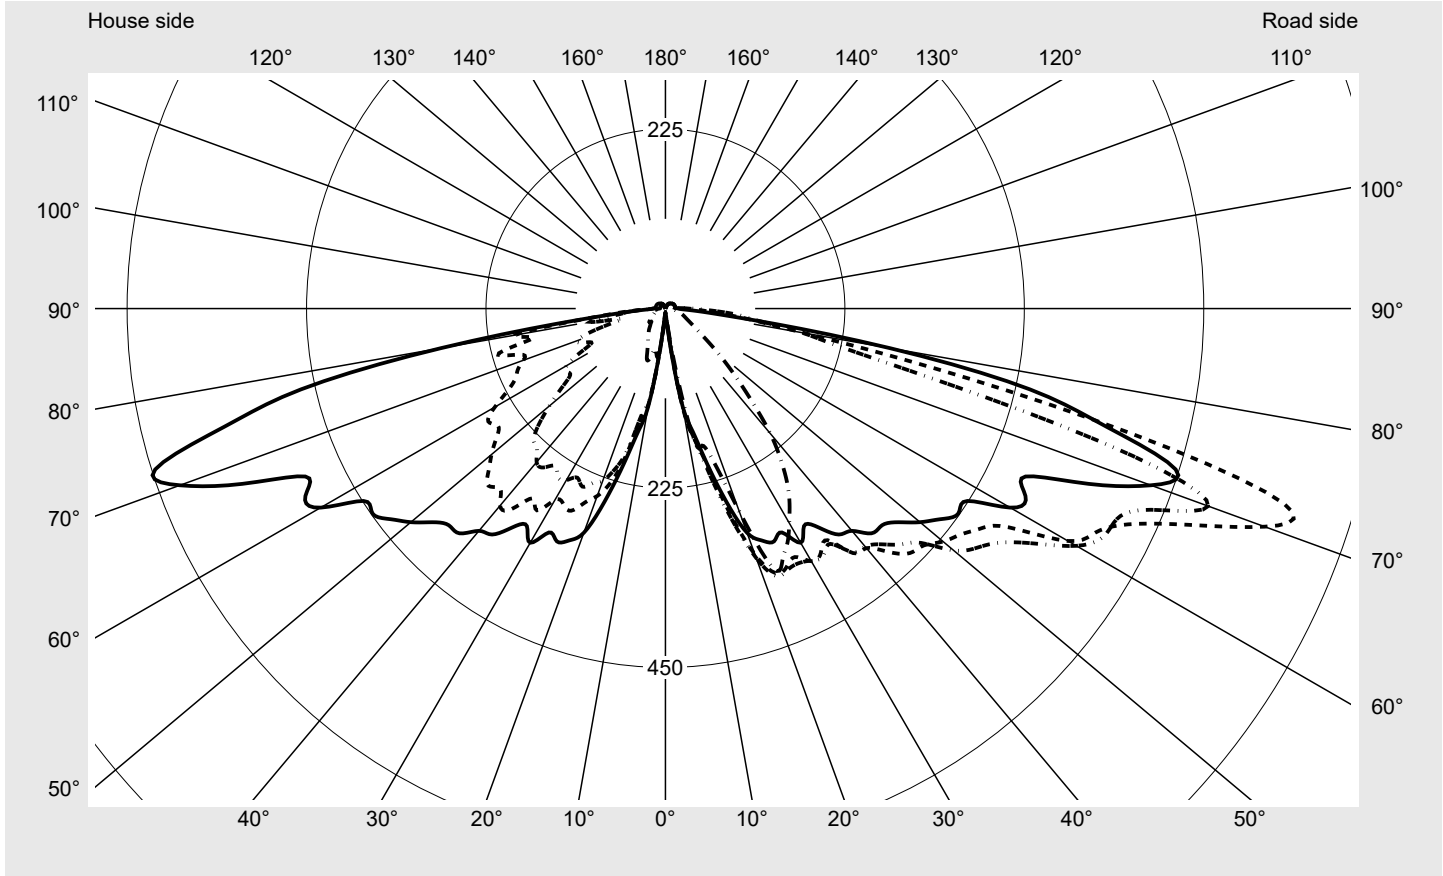


Photometric test report

Family DL 11 iQ 	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
	Version post-top- or mounting to wall arm Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 4840 lm Power consumption = 33.6 W Luminous efficacy = 144 lm/W	serial documentation 18.03.2024



Luminous intensity in cd/klm C180-0 C190-10 C195-15 C270-90 **Imax: 813 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	94.5%
Eta 90° - 180°	5.5%


Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	799.6
Imax 80°	285.8
Imax 90°	34.0
Imax >90°	17.5
Imax >95°	12.2

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
---------------------------	--	-------------------------------

Envelope curve in cd/klm **KMK 72.5°** **KMK 70°** **KMK 67.5°** **KMK 65°** **siteco**

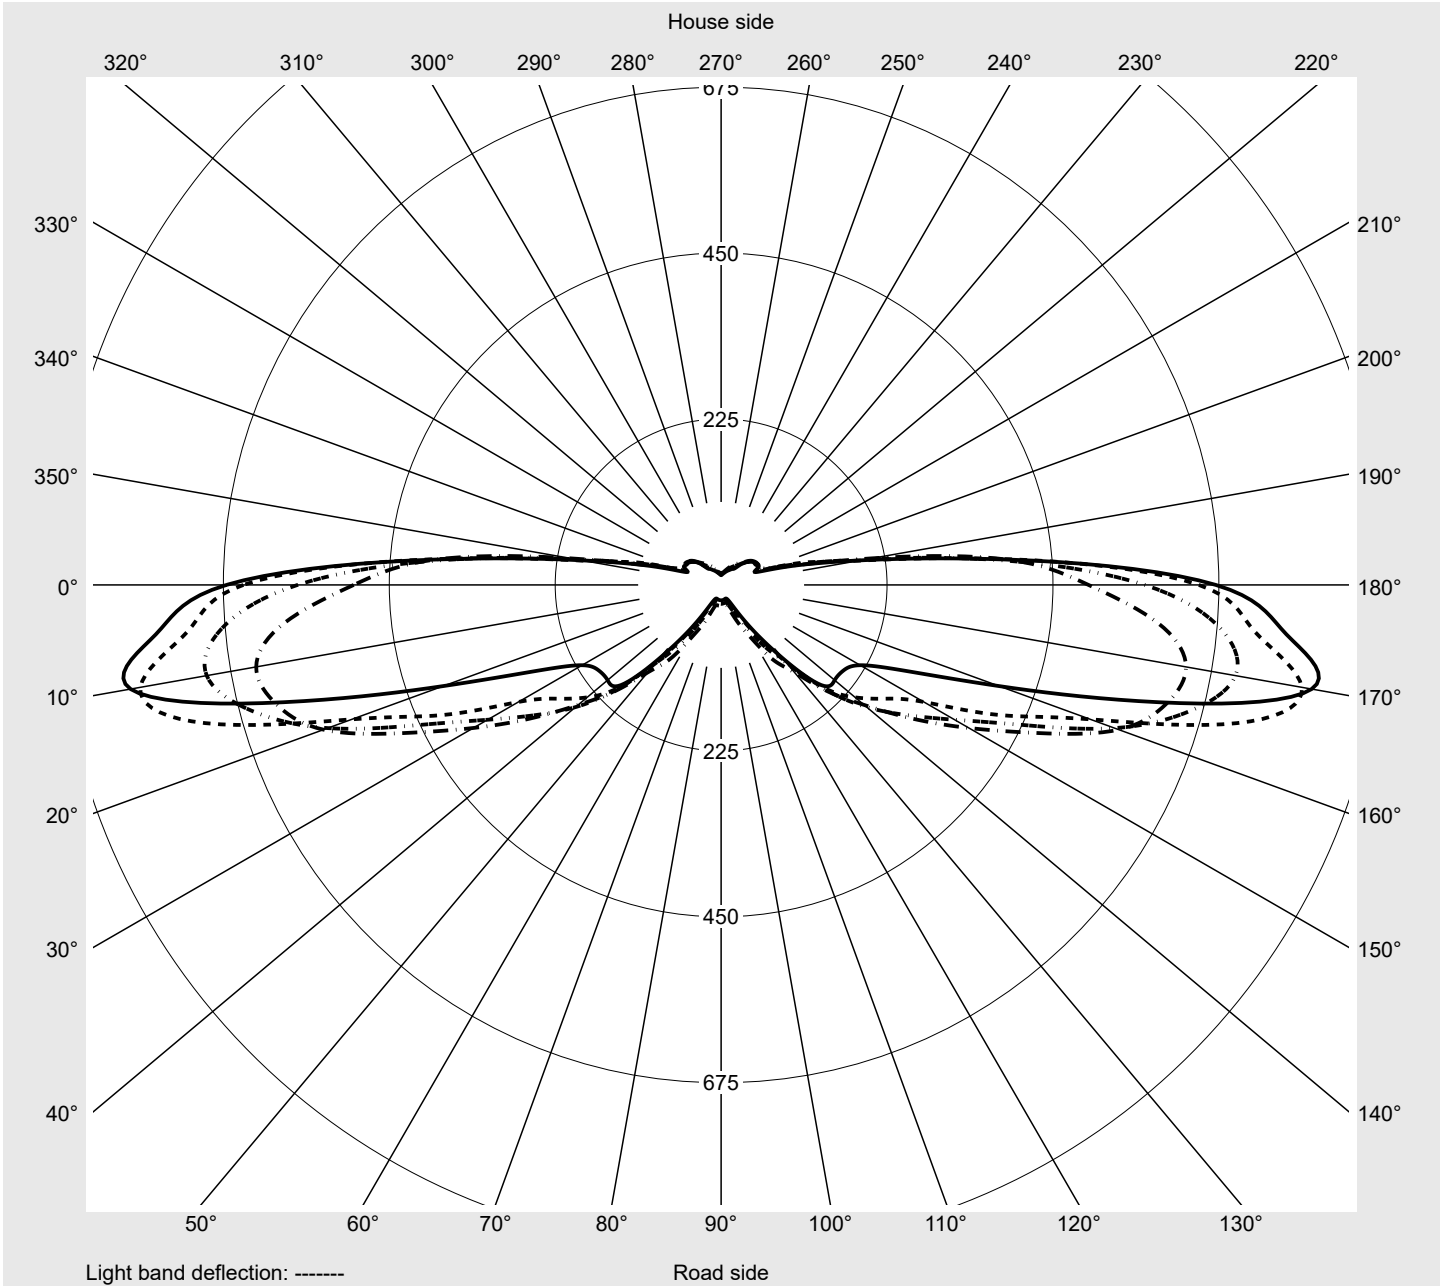

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	5.9	5.8	5.9	6.0	6.0	5.9	6.1	6.1	6.2	6.2	6.3	6.5	6.7
5,0°	11.1	10.5	10.0	9.4	9.2	9.0	8.9	8.9	9.0	9.1	9.1	9.3	9.3
7,5°	51.0	46.1	42.5	39.9	38.1	36.6	35.7	34.7	34.6	34.0	33.0	32.1	31.1
10,0°	125.2	125.3	128.8	126.8	124.3	116.8	101.6	92.3	89.6	88.8	87.0	85.9	87.1
12,5°	157.8	165.8	167.3	166.7	167.7	171.0	177.7	180.6	167.5	153.4	147.6	146.2	148.0
15,0°	201.1	204.4	204.8	216.7	228.3	228.4	230.0	230.6	242.1	252.3	252.3	242.0	227.8
17,5°	253.8	262.8	270.0	277.9	277.4	289.2	300.2	308.8	306.4	302.3	293.9	287.1	279.8
20,0°	299.1	311.6	328.2	332.9	334.9	330.4	321.5	311.9	309.5	316.8	321.9	316.6	305.0
22,5°	314.6	335.2	358.6	363.0	364.4	364.6	357.3	348.6	332.9	325.4	318.8	322.5	316.2
25,0°	322.1	337.7	358.4	361.9	366.3	367.9	366.4	359.8	344.9	332.8	326.9	317.9	310.3
27,5°	316.5	339.4	351.3	360.2	372.3	372.7	367.6	361.0	352.0	328.9	314.9	310.5	299.8
30,0°	339.1	357.1	365.7	365.0	366.6	371.8	373.7	357.0	339.3	327.0	307.3	300.0	286.5
32,5°	323.4	344.3	362.8	367.9	369.8	358.4	355.5	343.1	320.0	312.0	293.7	283.0	265.5
35,0°	335.2	356.8	354.5	360.1	371.4	375.6	365.5	350.1	327.5	305.1	279.4	264.0	244.6
37,5°	357.1	373.5	386.4	384.8	370.9	357.5	361.1	342.1	320.9	297.5	266.6	246.0	224.5
40,0°	363.8	381.6	392.1	389.7	388.8	367.7	352.3	329.0	302.3	280.4	253.4	223.8	203.9
42,5°	382.3	402.3	413.8	400.9	396.3	380.6	362.2	337.7	297.9	261.8	233.4	208.6	198.8
45,0°	384.2	407.0	433.5	418.1	400.9	367.4	351.6	320.8	286.1	256.5	231.1	200.7	190.7
47,5°	396.6	411.1	439.5	435.0	431.1	383.2	358.6	315.0	276.8	245.4	210.2	189.5	178.8
50,0°	416.7	432.1	454.5	471.8	470.1	407.5	356.6	305.7	255.1	223.1	183.9	175.3	166.3
52,5°	433.9	469.5	465.8	492.6	476.3	426.2	360.0	290.1	244.5	209.3	168.8	162.7	151.9
55,0°	448.3	486.3	481.4	511.7	475.9	443.5	374.1	299.6	239.6	193.1	160.7	161.9	140.5
57,5°	448.9	502.6	510.5	548.2	520.2	455.0	366.9	298.1	237.0	192.7	165.4	157.8	122.0
60,0°	499.1	547.3	582.8	595.0	567.4	479.6	375.6	313.0	253.5	197.7	167.4	150.2	117.9
62,5°	508.9	568.6	608.1	619.3	601.4	492.2	387.9	321.1	256.2	206.2	169.0	135.3	108.2
65,0°	498.2	594.8	640.2	624.5	573.8	475.4	388.0	315.8	253.2	203.9	154.9	124.9	85.7
67,5°	574.4	679.9	708.3	659.2	567.7	448.9	365.6	307.9	257.8	201.5	139.1	100.3	59.7
70,0°	647.9	726.4	799.6	724.2	532.9	417.7	317.4	269.0	237.3	197.6	135.3	82.2	46.1
72,5°	670.9	769.5	813.2	614.7	401.1	275.6	217.8	202.4	201.0	192.1	129.6	74.0	37.0
75,0°	572.7	659.7	603.1	372.2	231.6	175.1	154.5	139.0	140.7	142.2	94.4	54.8	27.2
77,5°	468.0	444.5	344.0	230.3	173.5	141.8	125.2	119.0	101.9	81.7	52.9	33.2	21.1
80,0°	285.8	235.7	176.8	173.6	137.8	94.2	90.9	98.1	70.3	55.6	37.7	24.2	16.4
82,5°	113.1	97.9	110.0	117.4	95.8	70.1	77.6	67.0	40.5	31.9	25.2	18.8	14.1
85,0°	47.4	54.3	66.4	91.3	81.1	55.8	51.6	40.8	26.6	23.1	19.1	14.7	12.3
87,5°	21.5	29.3	43.7	58.6	44.3	33.5	28.3	20.7	16.9	16.4	15.6	12.1	11.3
90,0°	16.4	20.8	29.3	34.0	25.5	18.7	17.7	13.4	12.6	12.9	12.4	11.1	10.8
92,5°	13.1	13.4	17.5	14.9	13.6	12.7	12.0	11.7	11.4	11.1	10.9	10.7	10.4
95,0°	12.3	12.4	12.4	12.3	12.2	12.0	11.7	11.4	11.2	11.0	10.8	10.5	10.4
97,5°	12.2	12.2	12.2	12.2	12.1	11.8	11.6	11.4	11.2	10.9	10.8	10.5	10.4
100,0°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.1	10.8	10.7	10.5	10.4
102,5°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.0	10.9	10.7	10.5	10.4
105,0°	12.2	12.2	12.2	12.1	12.0	11.7	11.4	11.2	11.0	10.8	10.6	10.5	10.4
107,5°	12.1	12.1	12.1	12.0	11.8	11.6	11.3	11.1	10.9	10.7	10.5	10.4	10.3
110,0°	12.0	12.0	11.9	11.9	11.7	11.5	11.3	11.0	10.8	10.6	10.5	10.4	10.3
112,5°	11.9	11.8	11.9	11.7	11.6	11.4	11.1	10.9	10.7	10.5	10.4	10.3	10.2

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	6.8	7.0	7.1	7.3	7.3	7.4	5.9	5.9	6.0	6.1	6.1	6.1	6.2
5,0°	9.4	9.5	9.7	9.8	9.8	9.8	11.7	12.5	13.8	15.5	17.4	18.5	19.5
7,5°	30.0	28.4	27.6	27.4	26.9	26.6	53.0	53.4	52.5	51.4	50.3	50.6	51.3
10,0°	88.0	90.4	91.0	91.9	92.3	91.4	120.8	120.8	116.9	104.2	91.8	78.5	72.5
12,5°	153.1	158.8	164.5	170.5	172.5	172.3	146.0	139.3	134.8	134.5	129.3	125.1	117.5
15,0°	211.6	200.5	189.3	183.1	178.5	177.9	196.5	190.6	182.9	173.5	168.2	149.9	132.7
17,5°	269.1	253.6	232.4	214.6	204.0	201.5	238.8	229.0	211.4	186.1	168.3	150.0	130.3
20,0°	301.9	298.2	289.8	280.8	274.3	270.1	269.6	250.1	229.7	204.9	176.3	152.9	134.4
22,5°	317.4	318.6	316.8	324.3	342.3	352.1	289.5	263.0	236.5	208.1	175.0	145.3	128.4
25,0°	316.0	319.1	322.1	336.7	346.6	347.4	302.2	279.7	246.3	211.8	174.9	139.4	120.9
27,5°	301.6	301.1	306.9	322.1	329.5	331.3	299.7	276.8	239.1	196.9	169.4	144.6	112.7
30,0°	282.6	280.2	289.2	303.6	307.7	310.4	307.9	277.2	248.6	204.2	170.2	137.6	96.5
32,5°	259.6	260.0	271.1	283.7	286.3	289.7	322.2	300.0	250.5	202.2	164.6	116.8	85.2
35,0°	237.3	241.4	253.3	262.2	264.2	265.8	315.1	290.5	240.9	200.6	160.5	108.3	84.8
37,5°	216.8	222.2	232.2	236.8	236.6	236.7	340.4	316.9	251.2	212.6	149.5	103.0	76.2
40,0°	198.5	203.8	207.7	208.8	205.4	204.6	351.4	322.5	251.3	201.1	135.1	98.7	62.3
42,5°	188.3	182.1	180.8	176.1	168.7	166.1	357.5	306.5	238.4	176.6	123.5	83.0	60.4
45,0°	179.7	164.3	154.8	145.8	136.4	133.1	370.3	314.1	233.4	148.8	105.1	68.9	62.4
47,5°	160.6	141.3	129.1	118.0	110.3	106.6	373.9	300.6	215.6	123.6	82.7	64.1	59.9
50,0°	144.8	124.3	109.5	96.5	87.8	84.2	373.2	284.7	190.0	107.7	66.5	59.7	56.2
52,5°	126.5	104.1	92.6	78.0	68.8	65.8	369.4	267.3	164.9	93.5	62.4	56.7	54.2
55,0°	111.3	85.8	74.1	60.3	54.1	52.5	373.7	256.3	145.8	82.8	62.7	56.7	54.2
57,5°	93.5	75.6	62.0	47.5	43.7	43.4	379.7	263.4	146.9	82.8	62.7	55.2	54.5
60,0°	86.0	60.1	46.8	37.9	37.1	37.0	385.2	246.9	142.8	83.5	61.6	58.2	56.8
62,5°	82.5	48.9	35.8	32.3	32.1	32.1	389.4	223.1	121.9	77.7	56.3	56.6	54.8
65,0°	59.7	38.9	29.0	28.1	28.3	28.5	391.4	207.5	102.2	66.3	55.9	56.8	55.3
67,5°	40.4	28.9	25.1	25.0	25.4	25.7	382.8	200.4	111.7	62.2	54.7	56.8	55.0
70,0°	30.9	24.2	22.2	22.4	23.1	23.2	397.6	189.6	117.8	59.5	55.3	57.1	53.1
72,5°	22.9	19.6	19.7	20.3	20.7	20.8	393.3	191.9	99.3	50.9	55.2	54.4	53.5
75,0°	17.7	17.6	17.9	18.3	18.3	18.3	419.2	216.1	66.2	48.4	52.3	52.6	49.4
77,5°	16.4	16.1	15.9	15.8	15.3	14.8	325.7	169.7	59.3	43.1	47.7	45.8	42.1
80,0°	14.6	14.4	14.2	13.6	13.1	12.8	240.2	191.3	95.9	40.4	43.0	40.2	35.1
82,5°	13.0	12.9	12.4	12.0	11.7	11.7	172.7	107.2	62.9	34.6	35.4	32.5	28.7
85,0°	11.9	11.7	11.3	11.0	11.0	11.0	56.8	56.8	47.3	32.2	28.3	26.8	25.0
87,5°	10.8	10.8	10.6	10.4	10.3	10.2	16.4	24.5	23.0	22.6	22.7	22.9	22.7
90,0°	10.5	10.4	10.2	10.2	9.9	9.8	14.0	14.1	15.8	17.5	19.3	19.3	18.8
92,5°	10.3	10.1	10.0	9.9	9.8	9.8	12.5	12.5	13.5	14.2	14.3	13.4	12.3
95,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
97,5°	10.3	10.2	10.1	10.0	10.0	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
100,0°	10.4	10.2	10.2	10.2	10.1	10.1	12.2	12.0	11.8	11.6	11.4	11.1	10.8
102,5°	10.3	10.2	10.1	10.1	10.1	10.0	12.2	12.0	11.9	11.6	11.4	11.1	10.8
105,0°	10.2	10.2	10.1	10.1	10.0	9.9	12.1	12.0	11.8	11.6	11.4	11.1	10.8
107,5°	10.2	10.1	10.1	10.1	9.9	9.9	12.0	11.9	11.7	11.6	11.3	11.0	10.8
110,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.0	11.8	11.7	11.5	11.3	11.0	10.7
112,5°	10.1	10.0	9.9	9.9	9.8	9.9	11.8	11.8	11.6	11.5	11.2	11.0	10.6

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	0.0	0.0
2,5°	6.4	6.6	6.9	7.4	8.2	8.4	8.2	8.2	8.1	8.1	8.1	0.1	0.1
5,0°	20.5	21.9	22.1	22.1	21.8	21.5	21.2	21.1	21.4	21.7	21.6	0.3	0.4
7,5°	54.1	56.6	54.7	57.0	56.7	52.2	50.1	48.8	50.1	52.2	53.7	1.6	2.0
10,0°	67.9	65.0	64.1	63.9	63.1	60.4	56.1	54.6	56.8	60.3	61.2	4.3	6.3
12,5°	105.0	94.3	82.8	74.6	68.5	61.4	53.4	50.7	51.6	53.4	53.6	7.7	14.0
15,0°	117.7	106.0	96.2	86.9	80.4	70.8	61.5	55.1	52.8	52.7	53.1	11.9	25.8
17,5°	116.0	102.5	92.2	81.9	73.7	69.1	65.4	64.2	62.6	64.0	65.7	16.3	42.1
20,0°	112.3	98.0	86.1	75.6	68.2	63.7	62.0	63.9	62.1	64.8	68.0	20.7	62.8
22,5°	109.1	87.0	73.8	65.2	62.2	59.6	57.2	58.5	55.5	57.5	59.7	24.4	87.2
25,0°	95.8	75.0	64.1	59.0	56.2	55.4	51.6	52.5	50.0	51.2	52.9	27.0	114.2
27,5°	84.0	64.4	58.1	55.3	52.2	51.3	46.6	47.3	44.7	45.9	47.2	28.8	143.0
30,0°	73.6	60.7	55.1	52.7	50.0	47.6	43.0	43.7	41.5	42.2	43.6	30.6	173.6
32,5°	69.6	57.8	52.6	50.6	48.1	44.6	40.4	40.5	38.5	38.9	39.9	31.7	205.3
35,0°	62.5	53.2	51.1	49.4	46.4	42.5	38.3	37.9	35.9	36.0	36.6	33.0	238.3
37,5°	56.9	53.0	50.0	48.5	45.6	41.5	37.0	35.5	33.3	33.5	34.0	34.6	272.9
40,0°	55.3	53.0	50.4	47.5	43.1	38.8	34.7	32.8	30.8	30.7	30.8	35.3	308.2
42,5°	55.4	52.7	50.5	47.2	43.6	38.6	33.3	30.2	28.4	28.2	28.0	36.1	344.3
45,0°	57.1	53.0	50.5	47.4	42.9	37.8	32.8	29.1	26.4	26.2	25.9	36.7	381.0
47,5°	55.9	54.7	53.1	48.6	43.2	37.3	31.9	27.8	25.9	24.6	24.1	37.2	418.2
50,0°	54.3	53.0	52.0	48.5	42.9	36.7	31.1	26.8	24.5	24.8	26.3	37.7	455.9
52,5°	53.4	51.9	50.3	45.7	40.3	34.7	30.0	26.3	25.0	24.6	24.3	38.2	494.1
55,0°	52.7	50.6	48.6	43.5	39.1	34.8	30.2	25.1	21.8	21.2	20.6	38.9	533.0
57,5°	53.3	51.2	49.7	43.7	36.9	31.3	26.6	22.6	20.1	19.5	19.0	40.3	573.3
60,0°	53.3	48.2	45.6	40.4	34.8	29.8	25.5	21.8	19.4	18.8	18.1	43.0	616.3
62,5°	51.9	45.6	42.0	37.7	33.0	28.2	24.4	21.1	18.7	17.8	17.2	44.2	660.4
65,0°	51.0	43.7	38.4	34.5	30.4	26.4	22.6	19.7	17.6	16.6	16.1	44.0	704.4
67,5°	49.7	42.3	35.2	31.2	27.7	24.4	21.3	18.8	16.9	15.8	15.1	45.3	749.8
70,0°	48.6	41.0	32.4	28.6	25.5	22.8	20.2	17.9	16.2	15.0	14.1	46.3	796.1
72,5°	48.5	41.5	29.9	26.3	23.6	21.3	19.2	17.1	15.5	14.0	13.2	42.7	838.7
75,0°	44.3	38.7	27.8	24.7	22.0	20.1	19.4	18.0	16.5	15.0	14.1	34.0	872.8
77,5°	37.7	31.2	27.1	24.7	22.3	20.1	19.8	19.2	18.7	17.1	16.2	25.3	898.1
80,0°	28.5	26.9	24.9	22.8	20.8	18.9	18.2	17.7	17.8	16.4	15.8	18.6	916.7
82,5°	25.3	24.8	21.9	20.2	18.9	17.4	16.1	14.8	14.4	12.9	12.1	12.2	928.8
85,0°	23.7	22.6	18.5	16.8	15.9	15.1	14.0	12.8	12.2	11.4	10.8	8.3	937.1
87,5°	22.5	19.6	15.7	14.5	13.8	13.1	12.3	11.5	11.0	10.1	9.5	5.4	942.5
90,0°	18.9	15.3	13.2	12.3	11.4	10.8	10.4	10.0	9.6	8.3	7.5	4.1	946.6
92,5°	11.4	10.8	10.3	10.0	9.5	9.2	8.9	8.6	8.3	7.3	6.5	3.1	949.7
95,0°	10.4	10.2	9.8	9.6	9.2	9.0	8.7	8.5	8.1	7.2	6.4	2.9	952.6
97,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.6	8.2	7.2	6.4	2.9	955.5
100,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.2	6.4	2.9	958.3
102,5°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.3	6.6	2.8	961.1
105,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.8	8.6	8.3	7.3	6.7	2.8	963.9
107,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.5	8.2	7.2	6.6	2.7	966.7
110,0°	10.4	10.1	9.8	9.5	9.2	9.0	8.7	8.4	8.2	7.2	6.7	2.7	969.4
112,5°	10.3	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.0	7.2	6.7	2.6	972.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	11.8	11.8	11.7	11.6	11.5	11.3	11.0	10.8	10.6	10.4	10.2	10.2	10.1
117,5°	11.6	11.6	11.6	11.4	11.3	11.1	10.8	10.6	10.5	10.3	10.2	10.0	9.9
120,0°	11.4	11.3	11.3	11.2	11.1	10.9	10.7	10.5	10.3	10.2	10.0	9.9	9.8
122,5°	11.1	11.0	11.0	10.9	10.8	10.6	10.4	10.3	10.1	10.0	9.8	9.8	9.6
125,0°	10.7	10.8	10.7	10.6	10.5	10.3	10.2	10.0	9.9	9.8	9.6	9.5	9.4
127,5°	10.4	10.4	10.4	10.3	10.2	10.1	9.9	9.8	9.7	9.5	9.4	9.3	9.2
130,0°	10.0	10.0	9.9	9.9	9.8	9.8	9.6	9.5	9.4	9.3	9.2	9.1	9.1
132,5°	9.6	9.6	9.6	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.9	8.9	8.8
135,0°	9.1	9.1	9.1	9.1	9.1	9.0	8.9	8.9	8.8	8.7	8.6	8.6	8.6
137,5°	8.6	8.6	8.7	8.7	8.7	8.6	8.6	8.6	8.6	8.4	8.4	8.4	8.3
140,0°	8.2	8.3	8.3	8.3	8.4	8.3	8.2	8.2	8.2	8.2	8.1	8.1	8.1
142,5°	7.8	7.9	8.0	8.1	8.1	8.0	8.0	7.9	7.9	7.9	7.9	7.9	7.8
145,0°	7.5	7.5	7.5	7.6	7.6	7.7	7.7	7.7	7.7	7.7	7.7	7.6	7.5
147,5°	6.9	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.3	7.3	7.2	7.2	7.2
150,0°	6.3	6.3	6.4	6.4	6.5	6.6	6.6	6.6	6.6	6.6	6.6	6.7	6.7
152,5°	5.4	5.4	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.8	5.8
155,0°	4.2	4.3	4.4	4.5	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.7	4.7
157,5°	3.2	3.2	3.3	3.3	3.3	3.3	3.4	3.5	3.5	3.5	3.5	3.5	3.6
160,0°	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.4	2.4	2.4	2.3	2.4	2.4
162,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	2.0	2.0	2.1
165,0°	1.6	1.6	1.6	1.7	1.7	1.8	1.9	1.9	1.9	1.9	1.9	1.9	1.9
167,5°	1.5	1.5	1.5	1.5	1.6	1.7	1.7	1.7	1.7	1.9	1.9	2.0	1.9
170,0°	1.4	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.5
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	10.0	9.9	9.8	9.8	9.8	9.8	11.7	11.7	11.5	11.4	11.2	11.0	10.6
117,5°	9.9	9.8	9.8	9.8	9.6	9.6	11.5	11.5	11.4	11.2	11.0	10.8	10.5
120,0°	9.8	9.7	9.6	9.6	9.6	9.6	11.3	11.3	11.2	11.0	10.8	10.6	10.3
122,5°	9.6	9.4	9.4	9.4	9.4	9.4	11.0	11.0	10.8	10.7	10.5	10.3	10.1
125,0°	9.4	9.3	9.2	9.2	9.2	9.2	10.6	10.6	10.5	10.4	10.2	10.0	9.8
127,5°	9.2	9.1	9.1	9.1	9.1	9.1	10.3	10.3	10.2	10.1	9.9	9.8	9.5
130,0°	9.0	8.9	8.9	8.9	8.8	8.7	9.9	9.9	9.8	9.6	9.5	9.4	9.2
132,5°	8.7	8.7	8.6	8.6	8.6	8.6	9.5	9.5	9.3	9.2	9.1	9.0	8.8
135,0°	8.5	8.4	8.4	8.4	8.4	8.4	9.0	9.0	8.8	8.7	8.6	8.4	8.3
137,5°	8.3	8.2	8.2	8.2	8.2	8.1	8.5	8.4	8.4	8.3	8.1	8.1	7.9
140,0°	8.1	7.9	7.9	7.9	7.9	7.9	8.1	8.1	8.0	7.9	7.8	7.6	7.5
142,5°	7.8	7.7	7.7	7.7	7.7	7.7	7.8	7.7	7.6	7.5	7.4	7.3	7.2
145,0°	7.6	7.5	7.5	7.5	7.5	7.5	7.4	7.3	7.2	7.1	7.1	6.9	6.9
147,5°	7.2	7.2	7.2	7.2	7.2	7.2	6.9	6.8	6.7	6.6	6.6	6.4	6.4
150,0°	6.7	6.7	6.7	6.7	6.7	6.7	6.1	6.0	6.0	5.9	5.7	5.7	5.6
152,5°	5.8	5.8	5.8	5.8	5.8	5.8	5.3	5.2	5.1	5.0	4.9	4.8	4.7
155,0°	4.8	4.8	4.8	4.8	4.8	4.7	4.2	4.1	4.0	4.0	3.9	3.8	3.7
157,5°	3.5	3.5	3.5	3.5	3.4	3.4	3.1	3.0	3.0	3.0	2.9	2.8	2.8
160,0°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1
162,5°	2.1	2.1	2.1	2.1	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8
165,0°	1.9	1.9	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.7	1.7	1.7	1.7
167,5°	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.5	1.5	1.5	1.5	1.5	1.5
170,0°	1.5	1.4	1.5	1.5	1.5	1.5	1.3	1.4	1.4	1.4	1.3	1.3	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
Table of values for luminous intensities		Maximum luminous intensity



C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	10.3	10.0	9.7	9.5	9.2	8.9	8.6	8.3	8.0	7.2	6.7	2.5	974.5
117,5°	10.2	9.9	9.6	9.3	9.0	8.8	8.5	8.2	7.9	7.1	6.7	2.5	977.0
120,0°	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.1	7.7	7.0	6.7	2.4	979.3
122,5°	9.8	9.5	9.2	9.0	8.7	8.5	8.2	7.9	7.6	6.9	6.6	2.3	981.6
125,0°	9.5	9.2	9.0	8.8	8.5	8.3	8.0	7.7	7.5	6.8	6.5	2.1	983.7
127,5°	9.2	9.1	8.8	8.5	8.3	8.1	7.7	7.5	7.1	6.7	6.5	2.0	985.7
130,0°	9.0	8.7	8.5	8.3	8.1	7.8	7.5	7.2	6.9	6.6	6.4	1.9	987.6
132,5°	8.6	8.3	8.1	7.9	7.7	7.5	7.2	6.8	6.6	6.3	6.2	1.7	989.4
135,0°	8.1	7.8	7.7	7.5	7.3	7.2	6.9	6.5	6.3	6.1	6.0	1.6	991.0
137,5°	7.7	7.5	7.4	7.2	7.0	6.9	6.6	6.3	6.1	6.0	6.0	1.5	992.4
140,0°	7.3	7.1	7.1	6.9	6.8	6.4	6.4	6.0	5.9	5.8	5.8	1.3	993.8
142,5°	7.1	6.9	6.8	6.7	6.5	6.2	6.1	5.8	5.7	5.7	5.7	1.2	995.0
145,0°	6.7	6.6	6.5	6.4	6.3	6.2	5.9	5.6	5.6	5.6	5.7	1.1	996.1
147,5°	6.3	6.2	6.0	6.0	5.8	5.8	5.5	5.3	5.2	5.3	5.3	1.0	997.1
150,0°	5.5	5.4	5.4	5.2	5.1	5.0	4.8	4.6	4.6	4.6	4.6	0.8	997.9
152,5°	4.7	4.5	4.5	4.3	4.3	4.2	4.0	3.9	3.8	3.8	3.8	0.6	998.6
155,0°	3.6	3.6	3.5	3.4	3.3	3.3	3.3	3.1	3.1	3.1	3.0	0.5	999.0
157,5°	2.8	2.7	2.7	2.6	2.6	2.5	2.4	2.4	2.4	2.4	2.4	0.3	999.4
160,0°	2.1	2.1	2.1	2.1	1.9	1.9	1.9	1.9	1.9	1.9	1.9	0.2	999.6
162,5°	1.7	1.8	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.2	999.7
165,0°	1.7	1.7	1.6	1.5	1.5	1.6	1.5	1.5	1.5	1.6	1.5	0.1	999.8
167,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
170,0°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	1.3	1.4	1.3	1.4	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565EF14HP00022 EAN: 4058352955871	LP number 59429_123
--------------------	--	------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4840	33.6	35.9	34.8
95	241	252	4592	31.3	33.5	32.4
90	229	250	4364	29.4	31.4	30.4
85	216	248	4116	27.3	29.2	28.2
80	203	246	3868	25.4	27.1	26.2
75	190	243	3620	23.5	25.1	24.3
70	178	241	3392	21.9	23.3	22.6
65	165	238	3144	20.1	21.4	20.8
60	152	235	2896	18.4	19.5	19.0
55	140	232	2668	16.8	17.9	17.4
50	127	229	2420	15.2	16.2	15.7
45	114	225	2172	13.7	14.5	14.1
40	102	221	1944	12.2	13.0	12.6
35	89	216	1696	10.7	11.3	11.0
30	76	210	1448	9.2	9.7	9.4
25	63	203	1200	7.8	8.2	8.0
20	51	195	972	6.6	6.9	6.8
15	38	184	724	5.2	5.5	5.4
11	28	173	534	4.1	4.4	4.2