


Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
	Version post-top- or mounting to wall arm, shielding on building side Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 4830 lm Power consumption = 33.6 W Luminous efficacy = 143.7 lm/W	serial documentation 18.03.2024






Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 738 cd/klm**

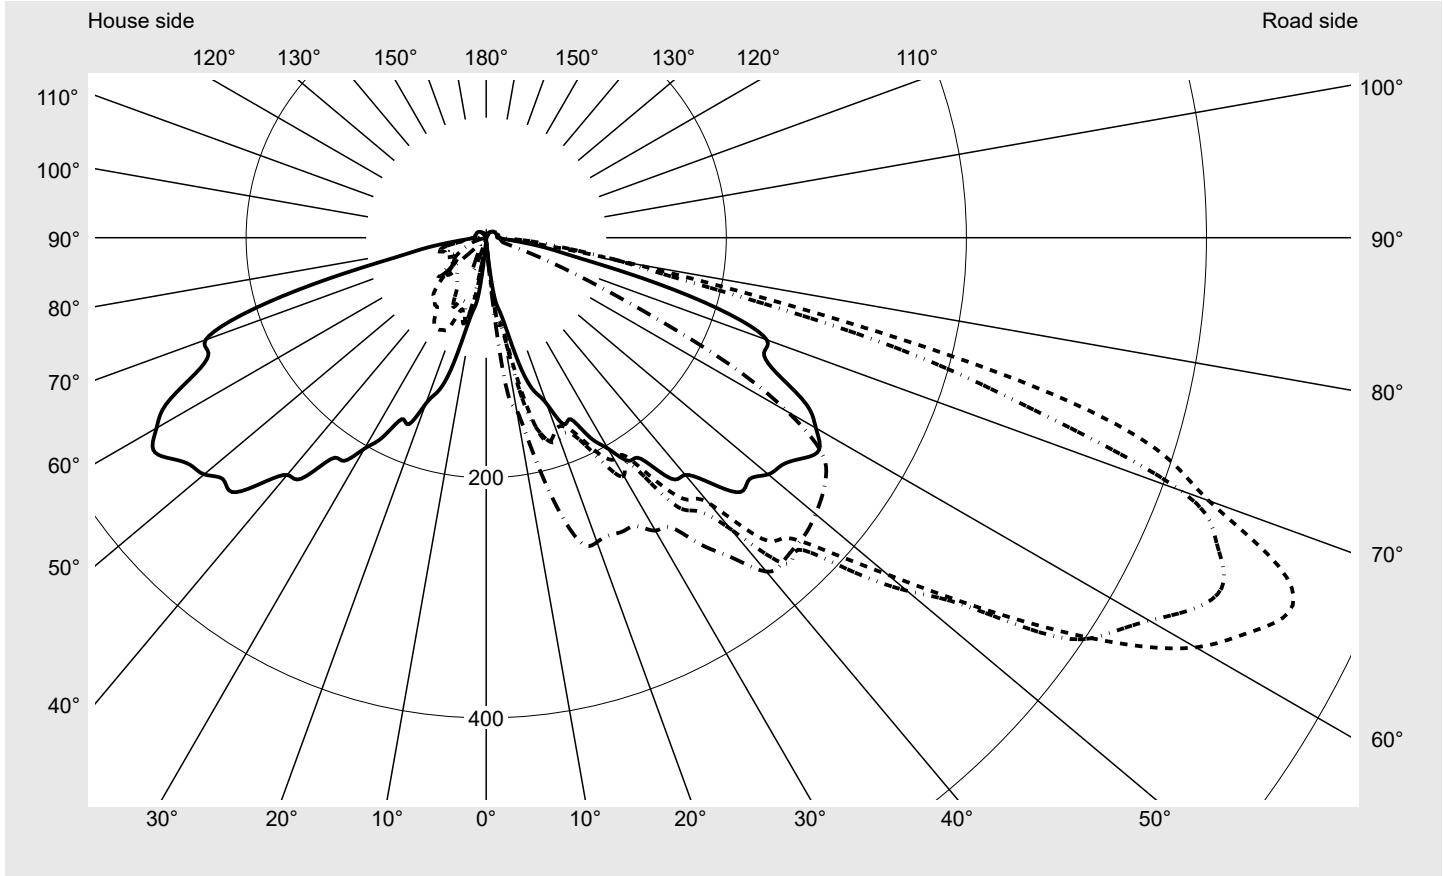

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%


Luminous intensity class acc. to EN13201-2	
Class:	G2
Imax 70°	640.5
Imax 80°	145.0
Imax 90°	10.9
Imax >90°	10.7
Imax >95°	10.6

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
---------------------------	--	-------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

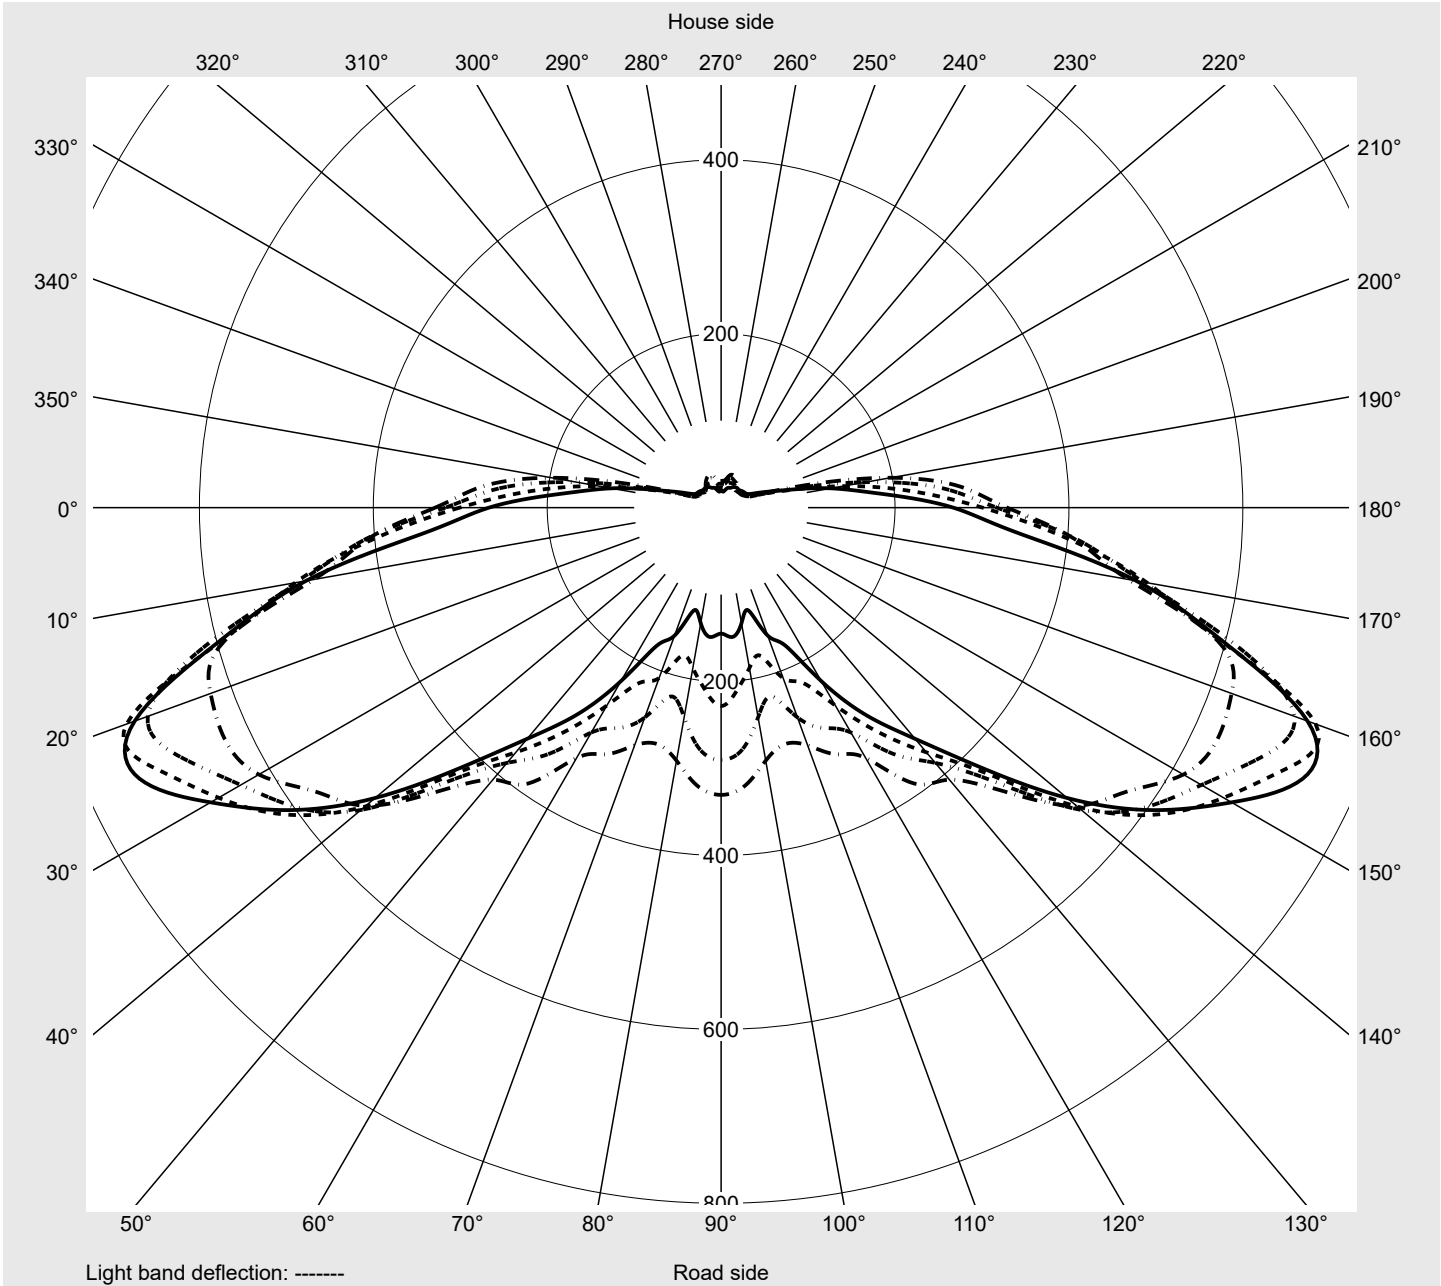

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
Table of values for luminous intensities		Maximum luminous intensity



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
2,5°	4.6	4.8	4.8	5.1	5.5	5.5	5.8	6.0	6.1	6.3	6.4	6.6	6.8
5,0°	10.1	11.7	13.1	14.5	16.5	19.0	23.1	27.6	30.1	31.7	32.7	33.2	33.2
7,5°	45.8	52.7	59.7	65.0	69.6	70.3	69.8	67.6	68.4	68.9	71.8	76.2	84.0
10,0°	60.8	66.5	68.3	71.3	73.4	73.9	77.2	83.0	91.9	106.3	117.1	124.2	130.1
12,5°	78.7	83.8	88.6	94.2	104.3	121.5	134.7	155.2	160.9	155.4	153.1	153.6	162.4
15,0°	113.9	117.7	136.9	148.0	162.0	166.8	165.5	169.0	172.8	176.4	176.2	179.7	187.8
17,5°	134.6	148.1	165.5	173.8	170.8	177.6	178.4	184.7	187.2	192.3	188.5	196.9	200.7
20,0°	147.1	154.1	160.7	167.8	171.6	170.0	178.2	176.6	180.5	185.5	189.8	197.7	204.4
22,5°	168.1	178.7	179.9	173.3	167.5	170.3	175.4	181.4	183.9	191.3	196.3	207.8	216.8
25,0°	166.8	174.4	185.3	189.3	190.6	182.5	187.0	192.8	203.2	211.1	211.8	225.5	237.8
27,5°	187.8	203.9	197.9	195.4	201.2	202.5	211.5	216.8	220.7	231.0	237.4	246.3	256.8
30,0°	202.9	208.0	213.1	210.8	210.6	213.3	229.2	243.5	246.2	255.6	261.4	278.3	282.9
32,5°	220.4	218.6	215.8	217.9	215.1	215.6	222.9	239.2	258.9	277.3	282.1	295.0	298.6
35,0°	224.9	232.8	240.4	234.4	238.6	248.3	269.5	285.4	297.1	316.0	318.4	322.7	332.0
37,5°	253.0	255.6	248.3	254.9	264.2	275.1	286.7	300.4	321.2	337.0	347.0	347.9	358.6
40,0°	257.9	266.5	264.5	258.4	270.2	288.7	316.9	334.1	351.0	363.1	373.8	376.0	384.9
42,5°	277.6	283.4	299.6	295.3	316.1	340.1	368.5	387.2	390.0	404.6	408.5	402.8	398.5
45,0°	299.6	295.1	307.7	303.2	319.8	353.7	367.5	396.3	416.6	428.5	437.5	418.3	416.8
47,5°	297.6	298.6	316.8	330.8	351.5	387.5	409.4	435.3	438.1	439.0	444.1	428.2	428.1
50,0°	306.7	329.2	361.4	387.7	387.9	436.6	457.5	468.9	451.9	444.9	439.0	428.2	414.2
52,5°	310.8	357.1	388.5	464.3	460.5	497.2	503.6	507.2	481.5	460.8	443.4	426.7	396.6
55,0°	320.7	386.4	418.0	524.6	542.5	564.1	579.5	539.5	517.8	470.9	432.4	414.8	357.5
57,5°	328.9	407.2	475.3	591.1	624.8	629.9	613.9	569.4	533.4	461.9	408.4	387.4	332.3
60,0°	317.1	409.4	493.0	614.1	701.7	682.5	637.9	599.3	541.0	446.1	383.2	345.9	298.6
62,5°	300.7	398.1	497.5	596.4	727.6	713.9	667.3	614.9	534.9	432.4	367.4	315.1	262.7
65,0°	267.0	345.2	484.8	599.3	717.7	737.9	677.9	606.4	519.5	422.6	347.0	291.7	230.3
67,5°	250.5	302.1	436.5	557.7	691.6	714.2	657.9	590.9	492.9	388.7	325.9	263.5	194.3
70,0°	248.7	318.9	435.5	549.7	628.9	640.5	615.9	523.1	429.7	354.1	292.6	230.1	166.8
72,5°	213.3	322.6	378.3	517.5	586.3	585.0	481.0	436.0	346.9	275.0	219.7	176.9	141.0
75,0°	148.1	253.8	327.0	444.8	468.9	459.1	351.8	304.2	217.7	181.2	171.1	158.6	130.0
77,5°	82.5	141.9	210.5	281.2	307.0	254.5	186.0	162.2	138.2	122.3	123.0	120.7	110.9
80,0°	54.2	73.1	104.8	127.3	145.0	120.2	115.4	123.7	96.6	68.0	51.4	41.5	50.3
82,5°	31.6	38.4	43.5	55.6	62.3	52.2	68.0	87.5	70.1	45.3	24.8	19.5	15.0
85,0°	17.5	18.4	16.5	16.0	15.0	20.0	41.5	50.4	36.9	22.5	15.7	13.9	11.9
87,5°	12.2	11.9	12.2	12.2	13.1	15.4	19.2	21.8	15.7	12.1	12.1	11.2	11.1
90,0°	9.4	9.8	10.1	10.4	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.6
92,5°	9.4	9.8	10.1	10.3	10.4	10.4	10.6	10.7	10.7	10.7	10.6	10.6	10.4
95,0°	9.4	9.6	10.1	10.3	10.4	10.4	10.4	10.4	10.6	10.6	10.6	10.4	10.4
97,5°	9.3	9.4	9.9	10.1	10.4	10.4	10.4	10.4	10.6	10.4	10.4	10.4	10.4
100,0°	9.4	9.4	9.8	10.1	10.1	10.4	10.4	10.4	10.6	10.4	10.4	10.4	10.4
102,5°	9.1	9.4	9.8	9.8	10.1	10.1	10.4	10.4	10.4	10.4	10.4	10.3	10.3
105,0°	9.1	9.4	9.4	9.8	10.1	10.1	10.1	10.3	10.3	10.3	10.3	10.3	10.3
107,5°	8.9	9.3	9.3	9.6	9.8	9.9	10.1	10.1	10.1	10.3	10.1	10.1	10.1
110,0°	8.9	9.1	9.3	9.4	9.8	9.8	9.8	9.9	9.9	9.9	9.9	9.9	9.9
112,5°	8.8	9.1	9.1	9.3	9.4	9.6	9.6	9.8	9.9	9.8	9.9	9.9	9.9

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2
2,5°	6.9	7.1	7.3	7.1	7.3	6.9	4.5	4.3	4.1	4.1	4.1	4.0	4.0
5,0°	32.6	31.4	29.4	28.6	27.3	26.8	8.9	8.3	7.3	6.4	6.0	5.5	5.3
7,5°	94.6	106.3	108.3	112.3	121.9	122.7	37.9	29.3	21.2	15.4	11.1	7.9	6.4
10,0°	137.2	136.7	141.7	140.0	142.7	145.5	63.8	65.8	64.8	56.4	42.2	27.8	17.4
12,5°	172.3	182.7	187.0	186.5	188.8	188.2	74.6	70.4	67.0	65.1	64.3	66.5	60.0
15,0°	200.6	214.6	224.7	231.5	235.8	236.8	101.7	95.2	83.5	77.9	73.9	68.6	59.0
17,5°	209.5	223.0	238.9	252.1	260.4	267.5	111.3	98.5	85.8	72.6	64.5	57.5	51.1
20,0°	217.4	232.0	247.0	258.4	266.9	269.8	133.8	123.0	100.2	81.5	66.6	56.0	43.8
22,5°	224.7	231.6	245.7	257.9	265.7	268.2	164.2	138.7	121.5	105.6	81.5	56.4	38.2
25,0°	247.0	250.0	259.2	265.7	269.8	269.8	163.2	144.7	125.7	105.6	84.8	63.7	40.8
27,5°	267.8	273.5	274.5	275.3	271.5	270.8	182.7	162.0	134.6	103.8	86.3	57.5	34.9
30,0°	293.0	289.0	281.7	282.4	278.8	281.7	194.4	169.0	139.9	115.7	85.1	48.4	31.2
32,5°	312.0	305.9	294.0	290.0	290.0	286.0	210.8	188.0	148.8	113.1	80.2	45.0	28.8
35,0°	328.2	323.4	312.0	309.5	309.3	312.2	206.8	187.5	148.5	111.9	71.3	41.8	27.6
37,5°	358.1	357.5	344.7	333.6	336.6	335.6	240.2	210.1	165.8	126.2	70.3	40.2	29.4
40,0°	388.2	379.1	350.5	343.7	357.0	363.1	248.8	215.3	165.8	121.4	65.8	37.5	31.2
42,5°	404.4	385.9	355.8	357.3	365.4	366.1	262.2	214.9	161.9	113.4	65.1	37.4	33.7
45,0°	415.3	386.9	352.2	357.5	365.1	364.1	293.6	237.1	169.3	107.1	58.5	43.5	42.0
47,5°	415.0	375.3	352.0	359.6	365.2	362.4	286.9	226.7	153.3	94.6	48.8	43.5	37.7
50,0°	407.1	361.4	342.9	353.0	360.9	358.1	287.7	227.5	147.0	81.2	38.5	36.2	31.6
52,5°	384.2	347.5	334.1	341.9	351.5	352.8	286.0	224.4	133.3	67.6	34.4	31.4	28.1
55,0°	347.9	326.0	318.9	326.2	342.6	345.5	289.0	221.7	117.4	58.7	33.7	29.3	26.3
57,5°	313.0	291.0	281.7	295.5	320.6	330.3	276.4	197.9	98.9	43.5	31.4	28.4	27.1
60,0°	279.6	256.8	224.9	244.9	279.3	290.0	255.8	168.6	83.3	39.4	30.8	28.6	28.8
62,5°	222.4	208.7	176.6	187.3	210.6	228.2	219.1	142.5	74.7	45.8	35.2	30.1	29.8
65,0°	175.3	156.6	122.7	134.9	149.3	144.8	184.0	128.0	78.5	52.2	37.4	32.7	31.6
67,5°	141.4	108.3	73.1	82.3	88.8	85.6	177.7	119.4	75.6	48.3	37.7	34.7	34.4
70,0°	117.2	81.2	41.8	38.0	40.8	46.0	171.5	117.9	75.1	44.5	36.0	33.7	35.2
72,5°	94.6	50.4	26.1	20.3	19.2	20.8	152.6	110.3	68.3	42.2	38.5	35.7	36.9
75,0°	74.9	25.1	18.4	15.2	14.7	14.2	107.1	81.8	60.8	42.5	42.3	39.4	37.4
77,5°	43.3	18.2	14.7	13.2	13.2	13.2	62.5	56.5	52.4	39.2	37.9	35.7	25.5
80,0°	17.0	13.9	12.9	12.6	12.6	12.6	47.3	46.1	40.8	33.1	30.6	26.1	16.2
82,5°	13.1	12.1	12.1	11.9	12.1	11.9	30.8	29.9	28.3	23.5	20.0	16.4	13.6
85,0°	11.6	11.4	11.4	11.6	11.6	11.6	17.2	18.2	19.8	21.0	18.8	16.2	12.2
87,5°	10.9	10.7	10.9	10.9	10.9	10.9	12.6	13.6	14.7	15.0	14.1	12.6	11.1
90,0°	10.6	10.7	10.9	10.7	10.7	10.6	9.3	8.9	8.6	7.9	7.6	7.1	6.6
92,5°	10.6	10.6	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.9	7.3	6.9	6.4
95,0°	10.6	10.6	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.9	7.3	6.9	6.4
97,5°	10.4	10.6	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.8	7.3	6.8	6.4
100,0°	10.3	10.4	10.6	10.6	10.6	10.6	9.1	8.6	8.3	7.8	7.3	6.8	6.4
102,5°	10.3	10.4	10.6	10.6	10.6	10.6	8.9	8.6	8.1	7.8	7.4	6.8	6.4
105,0°	10.3	10.3	10.4	10.6	10.6	10.6	8.8	8.6	8.1	7.8	7.3	6.8	6.4
107,5°	10.3	10.3	10.3	10.3	10.3	10.3	8.8	8.4	8.1	7.8	7.3	6.8	6.4
110,0°	9.9	9.9	10.1	10.3	10.3	10.3	8.8	8.4	8.1	7.8	7.1	6.8	6.4
112,5°	9.9	9.9	9.9	9.9	9.9	9.9	8.8	8.4	8.1	7.8	7.1	6.8	6.4

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	0.0	0.0
2,5°	4.1	4.0	4.1	4.3	4.6	5.0	5.1	5.0	5.0	5.0	5.0	0.1	0.1
5,0°	4.8	4.5	4.3	4.1	4.0	3.8	3.8	3.6	3.6	3.5	3.6	0.4	0.4
7,5°	5.5	4.6	4.5	4.3	4.0	4.0	4.0	3.8	3.6	3.5	3.6	1.6	2.1
10,0°	12.4	9.1	6.3	5.1	4.3	4.0	4.0	3.8	3.6	4.0	3.6	3.1	5.1
12,5°	44.3	27.1	15.4	7.8	4.6	4.5	5.0	5.3	4.8	4.1	4.0	5.4	10.5
15,0°	53.9	53.2	49.1	40.8	26.1	15.5	7.3	4.3	3.8	3.5	4.0	8.1	18.6
17,5°	44.1	39.4	37.2	35.9	34.7	34.2	28.3	18.5	11.4	6.4	6.0	10.2	28.8
20,0°	33.7	30.9	29.6	27.9	25.8	25.1	25.1	25.6	26.1	21.8	24.8	11.8	40.6
22,5°	28.3	25.1	23.1	21.2	19.8	19.0	20.7	23.6	29.6	26.5	30.1	13.7	54.3
25,0°	30.6	23.6	19.7	18.2	17.0	16.2	22.0	24.5	24.3	19.3	21.5	15.9	70.2
27,5°	28.3	22.3	19.0	17.2	15.5	14.5	16.9	18.5	17.5	14.5	15.2	18.5	88.7
30,0°	27.0	23.0	19.5	17.4	15.9	14.2	13.9	15.7	14.2	12.1	12.6	21.3	110.0
32,5°	25.5	23.0	19.2	17.2	15.4	13.4	11.9	13.4	12.2	10.3	10.3	23.7	133.7
35,0°	25.8	22.5	18.8	17.5	15.4	13.2	11.2	12.1	10.7	9.1	8.9	27.3	161.0
37,5°	24.8	21.8	18.7	17.0	14.9	13.2	10.7	10.4	9.9	8.4	8.3	31.5	192.4
40,0°	28.1	23.0	19.8	16.4	16.0	13.2	10.9	9.9	9.4	8.1	7.9	35.0	227.4
42,5°	30.8	25.5	20.0	19.0	16.7	15.7	11.6	10.4	9.4	7.9	7.9	39.5	267.0
45,0°	32.1	24.3	23.0	23.3	23.3	22.0	20.5	16.7	11.9	8.8	8.3	43.0	309.9
47,5°	32.1	25.6	27.3	32.1	32.9	31.4	28.4	26.6	26.6	18.7	19.8	46.2	356.2
50,0°	27.9	26.1	30.3	35.2	38.7	38.9	38.4	38.9	34.9	37.0	50.3	49.8	406.0
52,5°	26.0	24.5	28.3	34.4	38.5	41.5	43.3	49.1	44.5	38.2	36.7	53.3	459.3
55,0°	25.0	24.1	27.1	35.2	39.4	46.0	45.0	41.5	36.9	33.7	32.4	56.4	515.8
57,5°	26.6	26.1	27.1	31.1	34.9	38.2	39.8	38.5	33.4	31.1	30.8	58.3	574.1
60,0°	26.8	25.5	25.8	28.9	33.2	34.7	36.0	33.9	28.4	27.6	27.4	58.4	632.4
62,5°	28.6	26.3	27.4	28.6	30.8	30.9	30.3	28.3	24.0	23.3	23.5	56.8	689.3
65,0°	30.1	28.9	29.1	28.6	27.3	25.1	24.3	22.2	19.3	18.7	20.2	54.3	743.6
67,5°	33.4	32.6	30.9	28.9	23.0	19.5	19.3	17.9	15.9	15.7	16.9	50.5	794.0
70,0°	37.2	32.6	30.9	28.4	18.4	14.7	15.0	13.7	12.7	12.6	13.6	46.6	840.6
72,5°	39.5	35.7	30.6	16.9	11.1	10.4	11.1	10.6	9.4	9.3	9.6	40.5	881.1
75,0°	32.7	19.2	10.3	8.3	7.4	6.9	6.9	6.4	6.0	5.8	6.0	31.6	912.7
77,5°	14.2	9.8	7.6	6.6	6.0	5.3	5.0	4.6	4.0	3.3	3.3	20.3	933.0
80,0°	11.4	8.9	7.1	6.0	5.3	4.6	4.3	3.6	3.3	3.0	3.0	11.6	944.6
82,5°	11.1	8.3	6.4	5.3	5.0	4.3	4.0	3.5	3.1	2.6	3.0	6.8	951.4
85,0°	9.1	7.3	6.1	5.1	4.6	4.0	3.6	3.3	3.0	2.6	2.6	4.0	955.4
87,5°	8.6	6.6	5.6	5.0	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.9	958.3
90,0°	6.1	5.6	5.3	4.6	4.3	4.0	3.6	3.1	3.0	2.6	2.6	2.2	960.6
92,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.1	3.1	2.6	2.6	2.2	962.8
95,0°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.1	3.1	2.8	3.0	2.2	965.0
97,5°	6.0	5.6	5.1	4.6	4.3	4.0	3.6	3.1	3.1	2.8	2.6	2.2	967.2
100,0°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.2	969.3
102,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.0	2.8	3.0	2.1	971.5
105,0°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.1	973.6
107,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.0	975.6
110,0°	6.1	5.6	5.1	4.6	4.3	4.0	3.6	3.3	3.1	2.8	3.0	2.0	977.6
112,5°	6.0	5.5	5.3	4.6	4.3	4.0	3.6	3.3	3.1	3.0	3.0	1.9	979.5

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.8	8.9	9.1	9.3	9.3	9.4	9.4	9.6	9.6	9.6	9.6	9.6	9.6
117,5°	8.8	8.8	8.9	9.1	9.1	9.1	9.3	9.3	9.3	9.4	9.4	9.4	9.4
120,0°	8.6	8.8	8.8	8.9	8.9	8.9	8.9	9.1	9.3	9.3	9.3	9.3	9.3
122,5°	8.4	8.6	8.6	8.6	8.8	8.8	8.8	8.9	8.9	8.9	8.9	8.9	8.9
125,0°	8.3	8.3	8.4	8.4	8.4	8.4	8.6	8.6	8.6	8.6	8.6	8.6	8.6
127,5°	7.9	7.9	8.1	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.4	8.3
130,0°	7.6	7.6	7.8	7.9	7.9	7.9	7.9	7.9	7.9	8.1	8.1	8.3	8.3
132,5°	7.3	7.3	7.4	7.4	7.6	7.6	7.6	7.6	7.6	7.8	7.8	7.9	7.9
135,0°	6.8	6.9	6.9	7.1	7.1	7.3	7.3	7.3	7.3	7.4	7.4	7.4	7.6
137,5°	6.4	6.4	6.6	6.8	6.8	6.8	6.9	6.9	6.9	7.1	7.1	7.3	7.3
140,0°	6.0	6.1	6.3	6.3	6.4	6.4	6.6	6.6	6.6	6.6	6.8	6.8	6.8
142,5°	5.6	5.8	6.0	6.0	6.0	6.1	6.1	6.3	6.3	6.4	6.4	6.4	6.4
145,0°	5.3	5.5	5.5	5.6	5.6	5.8	5.8	6.0	6.0	6.0	6.1	6.1	6.1
147,5°	5.0	5.0	5.0	5.3	5.3	5.3	5.5	5.6	5.6	5.6	5.6	5.8	5.8
150,0°	4.3	4.3	4.6	4.6	4.6	4.8	5.0	5.0	5.0	5.1	5.1	5.3	5.3
152,5°	3.6	3.8	4.0	4.0	4.0	4.0	4.3	4.3	4.3	4.3	4.3	4.3	4.3
155,0°	2.8	3.0	3.0	3.1	3.1	3.3	3.3	3.3	3.5	3.5	3.6	3.6	3.6
157,5°	2.0	2.1	2.3	2.3	2.3	2.3	2.3	2.3	2.5	2.3	2.3	2.3	2.5
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
162,5°	1.5	1.5	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.2	1.3	1.2	1.3	1.3	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	9.6	9.6	9.8	9.8	9.9	9.6	8.6	8.3	8.1	7.6	7.3	6.8	6.4
117,5°	9.4	9.6	9.6	9.4	9.6	9.6	8.6	8.3	8.1	7.6	7.3	6.8	6.4
120,0°	9.3	9.3	9.3	9.3	9.3	9.3	8.4	8.1	7.9	7.6	7.3	6.8	6.4
122,5°	8.9	8.9	8.9	8.9	8.9	8.9	8.3	7.9	7.8	7.4	7.1	6.8	6.4
125,0°	8.6	8.8	8.8	8.6	8.9	8.6	7.9	7.8	7.6	7.3	7.1	6.6	6.3
127,5°	8.4	8.6	8.6	8.6	8.6	8.6	7.8	7.6	7.3	7.1	6.8	6.4	6.1
130,0°	8.3	8.3	8.3	8.3	8.3	8.3	7.4	7.3	7.1	6.8	6.4	6.1	6.0
132,5°	7.9	7.9	7.9	7.9	7.9	7.9	6.9	6.9	6.6	6.6	6.3	6.0	5.6
135,0°	7.6	7.6	7.6	7.6	7.6	7.6	6.6	6.4	6.3	6.1	6.0	5.6	5.5
137,5°	7.3	7.3	7.3	7.3	7.3	7.3	6.3	6.1	6.0	5.6	5.5	5.3	5.1
140,0°	6.9	6.9	6.9	6.9	6.9	6.9	6.0	5.6	5.6	5.5	5.1	5.0	4.8
142,5°	6.6	6.6	6.6	6.6	6.6	6.6	5.6	5.5	5.3	5.1	5.0	4.6	4.6
145,0°	6.3	6.3	6.3	6.3	6.3	6.3	5.3	5.1	5.0	4.8	4.6	4.5	4.3
147,5°	6.0	6.0	6.0	6.0	6.0	6.0	4.6	4.6	4.5	4.3	4.3	4.0	4.0
150,0°	5.3	5.3	5.3	5.3	5.3	5.3	4.3	4.1	4.0	4.0	3.6	3.6	3.5
152,5°	4.6	4.6	4.6	4.6	4.6	4.6	3.6	3.6	3.3	3.3	3.0	3.0	3.0
155,0°	3.6	3.6	3.6	3.6	3.6	3.6	2.8	2.6	2.6	2.5	2.3	2.3	2.3
157,5°	2.6	2.6	2.6	2.6	2.6	2.6	2.0	2.0	2.0	2.0	2.0	1.8	1.8
160,0°	1.7	1.8	1.7	1.8	1.7	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7
162,5°	1.3	1.3	1.3	1.3	1.3	1.7	1.5	1.3	1.3	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.0	5.6	5.3	4.8	4.3	4.0	3.6	3.6	3.3	3.0	3.0	1.9	981.4
117,5°	6.0	5.6	5.3	4.6	4.3	4.0	3.8	3.6	3.3	3.0	3.0	1.8	983.2
120,0°	6.1	5.6	5.3	4.6	4.3	4.0	3.6	3.6	3.3	3.0	3.0	1.8	985.0
122,5°	5.8	5.5	5.0	4.6	4.3	4.0	3.6	3.5	3.3	3.0	3.0	1.7	986.7
125,0°	5.8	5.5	5.0	4.6	4.3	4.0	3.6	3.3	3.3	3.0	3.0	1.6	988.2
127,5°	5.8	5.5	5.0	4.5	4.3	4.0	3.6	3.3	3.1	3.0	3.0	1.5	989.7
130,0°	5.5	5.1	4.8	4.5	4.1	4.0	3.6	3.3	3.3	3.0	3.0	1.4	991.1
132,5°	5.5	5.0	4.6	4.3	4.0	3.6	3.6	3.3	3.1	3.0	3.0	1.3	992.4
135,0°	5.1	4.8	4.5	4.1	4.0	3.6	3.3	3.3	3.1	3.0	3.0	1.2	993.6
137,5°	4.8	4.5	4.3	4.0	3.6	3.6	3.3	3.1	3.0	2.8	2.6	1.1	994.6
140,0°	4.6	4.5	4.1	4.0	3.6	3.3	3.3	3.1	3.0	2.8	2.6	1.0	995.6
142,5°	4.5	4.1	4.0	3.8	3.6	3.3	3.3	3.1	3.0	2.8	2.6	0.9	996.5
145,0°	4.1	4.0	4.0	3.6	3.5	3.3	3.1	3.0	2.8	2.8	2.6	0.8	997.3
147,5°	3.8	3.6	3.6	3.3	3.1	3.0	3.0	2.8	2.6	2.6	2.6	0.7	998.0
150,0°	3.3	3.3	3.0	3.0	2.8	2.6	2.6	2.5	2.3	2.3	2.3	0.6	998.5
152,5°	2.6	2.6	2.6	2.3	2.3	2.3	2.3	2.0	2.0	2.0	2.0	0.4	999.0
155,0°	2.3	2.1	2.0	2.0	2.0	1.8	1.8	1.7	1.7	1.7	1.7	0.3	999.3
157,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.7	0.2	999.5
160,0°	1.5	1.7	1.7	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.7
162,5°	1.3	1.3	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.8
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
167,5°	1.3	1.5	1.7	1.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575EF14HP00022 + 5XA54000XBS EAN: 4058352768839 + 4050737971445	LP number 59424_128
---------------------------	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4830	33.6	35.9	34.8
95	241	252	4583	31.3	33.5	32.4
90	229	250	4355	29.4	31.4	30.4
85	216	248	4107	27.3	29.2	28.2
80	203	246	3860	25.4	27.1	26.2
75	190	243	3613	23.5	25.1	24.3
70	178	241	3385	21.9	23.3	22.6
65	165	238	3138	20.1	21.4	20.8
60	152	235	2890	18.4	19.5	19.0
55	140	232	2662	16.8	17.9	17.4
50	127	229	2415	15.2	16.2	15.7
45	114	225	2168	13.7	14.5	14.1
40	102	221	1940	12.2	13.0	12.6
35	89	216	1692	10.7	11.3	11.0
30	76	210	1445	9.2	9.7	9.4
25	63	203	1198	7.8	8.2	8.0
20	51	195	970	6.6	6.9	6.8
15	38	184	723	5.2	5.5	5.4
11	28	173	532	4.1	4.4	4.2