


# Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TE1WDV4M2M</b> <b>EAN: 4069025269980</b>	<b>LP number</b> <b>59521_21</b>
	<b>Version</b> cover frosted, wide distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 27420 lm Power consumption = 150.5 W Luminous efficacy = 182.2 lm/W	<b>serial documentation</b> <b>25.03.2024</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 610 cd/klm**

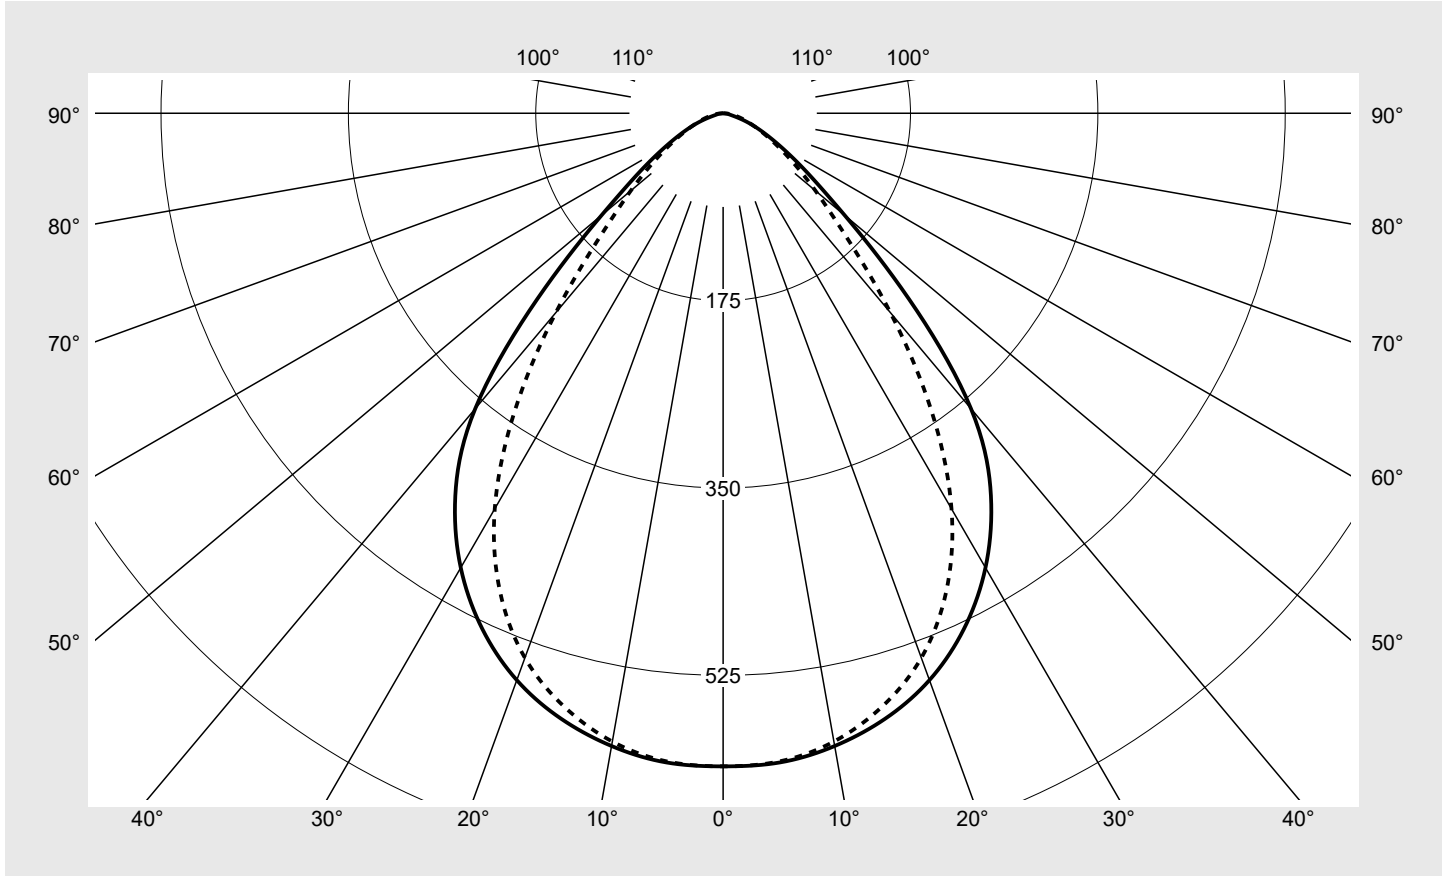

Classifications	
DIN 5040	A 5 0
CIE	N1=73 N2=94 N3=99 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TE1WDV4M2M</b> <b>EAN: 4069025269980</b>	<b>LP number</b> <b>59521_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	610.0	610.0	610.0	610.0	610.0	610.0	610.0	3.6	3.6
5°	608.6	607.6	603.5	605.7	607.8	607.2	607.6	29.0	32.6
10°	600.1	600.0	594.9	595.9	596.5	595.2	595.9	56.8	89.4
15°	585.3	585.9	578.8	577.8	576.6	573.9	573.7	82.1	171.5
20°	563.4	563.9	554.9	550.2	546.3	542.2	541.3	103.4	275.0
25°	531.8	531.9	519.6	510.4	502.3	495.0	493.0	118.6	393.5
30°	490.1	489.9	473.2	457.8	443.0	430.6	426.6	125.7	519.3
35°	436.1	434.9	413.9	389.9	365.2	345.5	339.2	122.5	641.7
40°	360.2	357.4	334.2	303.1	273.1	250.6	243.1	106.9	748.6
45°	245.6	242.6	226.1	203.9	182.4	166.8	161.9	79.2	827.8
50°	148.2	149.1	145.2	133.7	122.4	114.2	112.6	55.6	883.4
55°	94.6	95.2	94.9	92.6	85.9	79.9	79.2	40.1	923.5
60°	61.8	62.8	63.1	63.8	60.6	55.1	54.9	28.8	952.3
65°	39.8	41.1	42.4	42.8	42.4	38.1	37.8	20.3	972.6
70°	23.6	24.8	26.8	28.2	28.2	26.4	25.7	13.6	986.2
75°	10.5	11.2	13.0	16.6	16.9	18.1	17.0	7.9	994.2
80°	5.4	5.5	5.6	6.4	8.9	11.0	9.8	4.1	998.2
85°	2.7	2.8	2.9	2.9	2.8	4.7	4.7	1.8	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TE1WDV4M2M</b> <b>EAN: 4069025269980</b>	<b>LP number</b> 59521_21
---------------------------------------	--	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	24.5	26.0	24.9	26.3	26.6	23.2	24.7	23.6	25.0	25.3
	3H	24.8	26.0	25.2	26.4	26.7	23.7	24.9	24.0	25.3	25.6
	4H	24.8	26.0	25.2	26.3	26.7	23.8	25.0	24.2	25.4	25.7
	6H	24.8	25.8	25.2	26.2	26.6	24.0	25.0	24.4	25.4	25.8
	8H	24.9	25.8	25.3	26.2	26.6	24.1	25.0	24.5	25.4	25.8
	12H	24.8	25.7	25.3	26.1	26.5	24.1	25.0	24.5	25.4	25.8
4H	2H	24.7	25.8	25.0	26.2	26.6	23.5	24.7	23.9	25.0	25.4
	3H	25.0	26.0	25.4	26.4	26.8	24.1	25.0	24.5	25.4	25.9
	4H	25.0	25.9	25.5	26.3	26.8	24.3	25.2	24.8	25.6	26.0
	6H	25.1	25.8	25.5	26.2	26.7	24.5	25.3	25.0	25.7	26.2
	8H	25.0	25.7	25.5	26.2	26.6	24.6	25.3	25.1	25.7	26.2
	12H	25.1	25.6	25.6	26.1	26.6	24.7	25.3	25.2	25.7	26.2
8H	4H	25.1	25.7	25.5	26.2	26.7	24.4	25.0	24.8	25.5	26.0
	6H	25.1	25.6	25.6	26.1	26.6	24.6	25.2	25.1	25.6	26.2
	8H	25.1	25.5	25.6	26.0	26.6	24.7	25.2	25.2	25.7	26.2
	12H	25.1	25.5	25.6	26.0	26.5	24.8	25.2	25.4	25.7	26.3
12H	4H	25.1	25.6	25.6	26.1	26.6	24.4	24.9	24.9	25.4	25.9
	6H	25.1	25.5	25.6	26.0	26.5	24.6	25.1	25.1	25.6	26.1
	8H	25.1	25.5	25.6	26.0	26.5	24.7	25.1	25.3	25.6	26.2

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 2250</b>
			<b>B = 58</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		72989.2	72101.6	67176.7	60598.2	54193.7	49575.2	48102.8	
50°		48428.4	48742.2	47455.9	43703.3	40006.9	37316.7	36803.5	
55°		34641.1	34870.4	34774.1	33911.4	31457.0	29262.3	29011.4	
60°		25955.9	26371.5	26534.2	26822.0	25448.7	23166.9	23076.5	
65°		19806.4	20409.5	21067.3	21291.5	21099.6	18923.9	18805.1	
70°		14471.3	15215.8	16453.7	17302.7	17316.9	16198.2	15802.5	
75°		8559.0	9057.5	10574.8	13494.1	13736.0	14677.7	13836.7	
80°		6590.9	6662.3	6783.3	7803.3	10750.9	13358.4	11862.9	
85°		6608.0	6735.8	6878.0	7003.4	6665.9	11212.6	11212.6	


**Photometric test report**

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TE1WDV4M2M</b> <b>EAN: 4069025269980</b>	<b>LP number</b> <b>59521_21</b>
--	--	-------------------------------------



**Luminance values in cd/m<sup>2</sup>**

$\gamma$ 65°	$\gamma$ 70°	$\gamma$ 75°	$\gamma$ 80°	$\gamma$ 85°
--------------	--------------	--------------	--------------	--------------

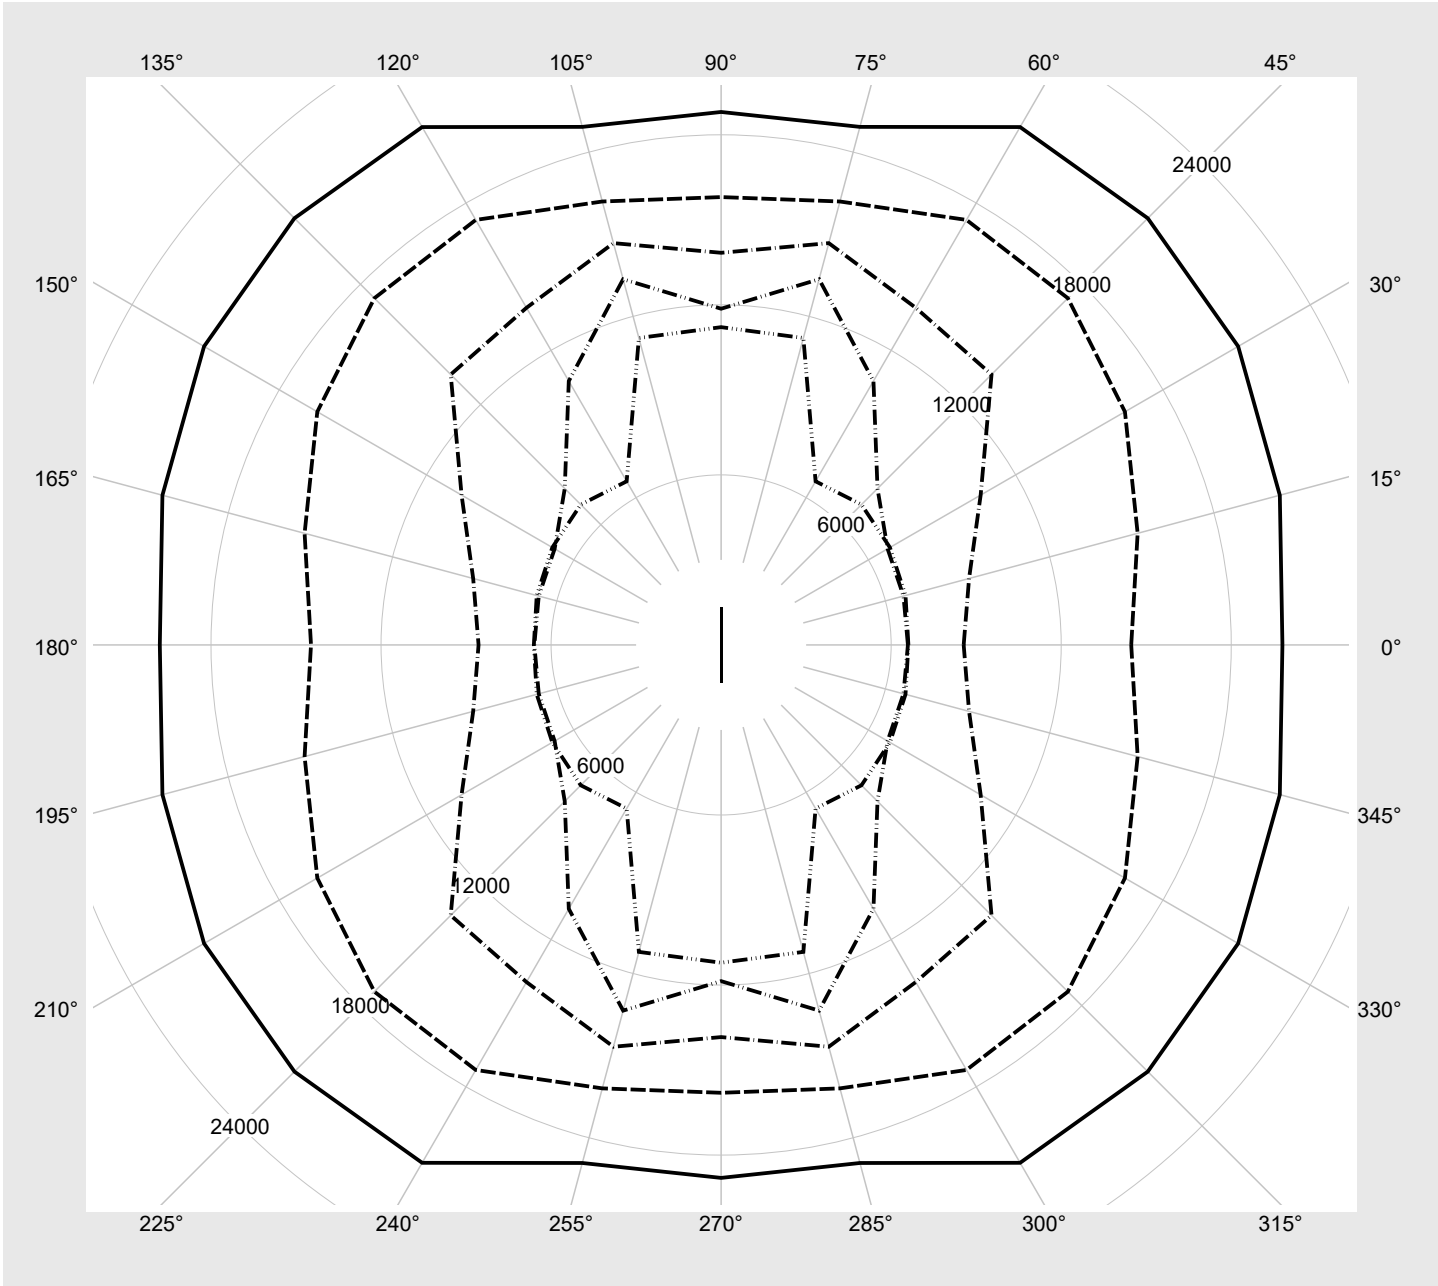

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TE1WDV4M2M</b> <b>EAN: 4069025269980</b>	<b>LP number</b> <b>59521_21</b>
---------------------------------------	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	27420	150.5
95	240	252	26025	141.7
90	226	250	24669	133.0
85	212	247	23276	124.4
80	199	245	21962	116.4
75	185	242	20529	107.9
70	172	240	19183	100.2
65	159	237	17822	92.6
60	146	234	16447	85.0
55	133	230	15061	77.5
50	120	227	13661	70.1
45	108	223	12356	63.2
40	95	218	10926	55.8
35	83	213	9589	49.0
30	71	207	8237	42.2
25	59	201	6872	35.3
20	47	192	5497	28.6
15	35	181	4105	21.7
10	23	166	2700	14.6
5	12	142	1403	7.9
2	4	102	450	2.8