

Photometric test report

Family
Powerbrik®



Order number: **51FC207A410AS**
EAN: **4069025125057**

Version

Lamps

Controlgear

Rated values

cover opal, polycarbonate

LED 4000 K | CRI ≥ 80


ECG

Net luminous flux = 900 lm
Power consumption = 6.5 W
Luminous efficacy = 138.5 lm/W

LP number
55804_4

serial
documentation
04.11.2024



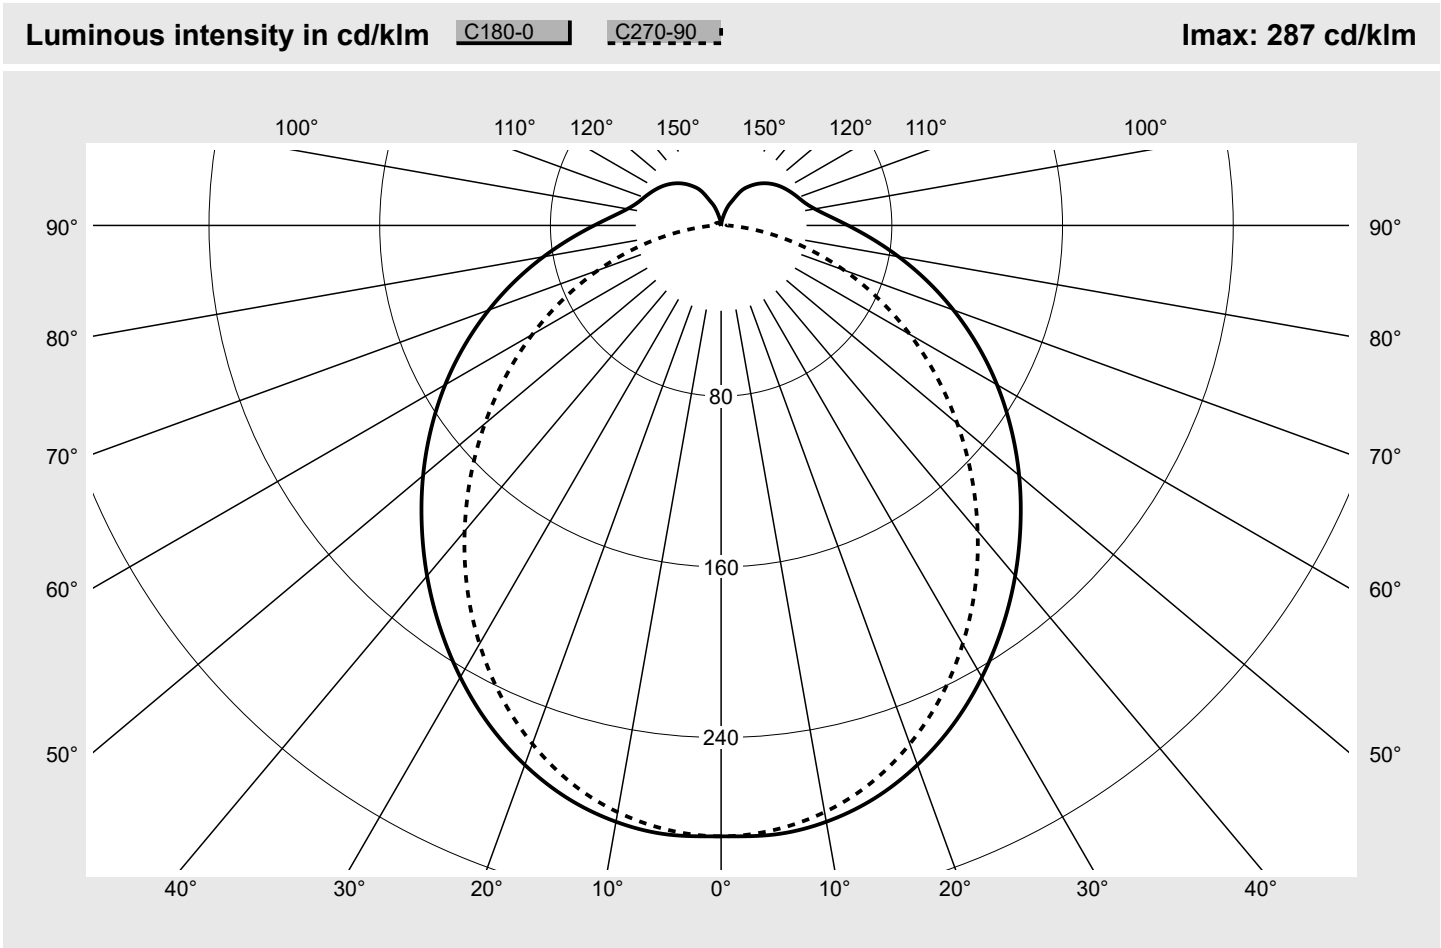

Classifications		Luminaire light output ratios	
DIN 5040	B 3 1	η_{LB}	100.0%
CIE	N1=44 N2=73 N3=91	ϕ_u	87.1%
	N4=87 N5=100	ϕ_o	12.9%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Powerbrik®	Order number: 51FC207A410AS EAN: 4069025125057	LP number 55804_4
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	286.3	286.3	286.3	286.3	286.3	286.3	286.3	1.7	1.7
5°	286.5	286.4	286.3	286.0	285.6	285.0	284.4	13.7	15.4
10°	283.8	283.6	282.9	282.0	280.8	279.8	279.2	26.8	42.2
15°	277.9	277.5	276.4	274.9	273.1	271.5	270.6	39.0	81.1
20°	269.0	268.7	267.1	264.9	262.3	260.0	258.6	49.6	130.7
25°	257.8	257.2	255.1	252.3	248.9	245.7	243.7	58.3	189.0
30°	244.4	243.6	241.2	237.5	233.3	229.1	226.4	64.9	253.9
35°	229.8	228.8	225.7	221.2	215.9	210.7	207.5	69.2	323.1
40°	214.4	213.0	209.2	203.8	197.4	191.1	187.0	71.4	394.5
45°	198.4	196.7	192.2	185.5	178.1	170.7	165.9	71.4	465.9
50°	182.3	180.3	174.9	167.2	158.5	150.0	144.5	69.6	535.5
55°	165.9	163.7	157.5	148.7	138.9	129.4	123.2	66.1	601.5
60°	149.3	146.8	140.1	130.4	119.5	109.0	102.1	61.1	662.6
65°	132.5	130.0	122.8	112.3	100.5	88.9	81.4	54.8	717.3
70°	115.9	113.2	105.7	94.5	81.8	69.3	61.3	47.5	764.8
75°	99.7	97.0	89.2	77.5	63.9	50.5	42.0	39.6	804.4
80°	84.5	81.8	74.0	61.9	47.6	33.2	24.2	31.8	836.2
85°	70.9	68.4	60.9	49.0	34.4	19.3	9.8	24.8	861.0
90°	59.5	57.3	50.4	39.5	26.0	12.0	3.1	19.8	880.8
95°	50.7	48.8	43.0	33.5	22.0	10.5	3.0	16.8	897.6
100°	44.6	43.1	38.3	30.4	20.8	10.2	2.9	15.0	912.5
105°	40.7	39.5	35.6	28.9	20.1	9.8	2.8	13.7	926.3
110°	38.4	37.3	33.8	27.7	19.2	9.3	2.6	12.7	939.0
115°	36.4	35.4	32.2	26.4	18.3	8.7	2.5	11.6	950.6
120°	34.5	33.6	30.6	25.0	17.2	7.6	2.4	10.5	961.1
125°	32.6	31.6	28.7	23.4	16.0	6.6	2.1	9.3	970.3
130°	30.4	29.5	26.7	21.6	14.5	5.5	2.0	8.0	978.3
135°	28.0	27.1	24.3	19.6	12.0	4.3	1.7	6.6	984.9
140°	25.2	24.4	21.7	17.3	9.8	3.6	1.5	5.3	990.2
145°	22.2	21.4	18.8	13.5	8.1	2.9	1.2	4.0	994.2
150°	18.6	17.7	14.4	10.5	5.6	2.2	0.9	2.7	996.9
155°	13.2	12.5	10.7	7.8	3.7	1.3	0.5	1.7	998.6
160°	9.7	9.2	7.4	4.7	2.4	0.5	0.1	0.9	999.5
165°	5.4	5.0	4.1	2.7	1.3	0.1	0.0	0.4	999.9
170°	2.5	2.2	1.6	0.9	0.3	0.1	0.1	0.1	1000.0
175°	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Powerbrik®		Order number: 51FC207A410AS EAN: 4069025125057							LP number 55804_4	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	20.8	22.3	21.2	22.8	23.3	20.2	21.8	20.7	22.3
	3H	22.6	24.0	23.1	24.5	25.0	21.7	23.1	22.1	23.6
	4H	23.4	24.7	23.9	25.3	25.8	22.1	23.5	22.6	24.0
	6H	24.2	25.4	24.7	25.9	26.5	22.4	23.7	23.0	24.2
	8H	24.6	25.7	25.2	26.3	26.9	22.5	23.7	23.1	24.2
	12H	24.9	26.0	25.5	26.6	27.2	22.6	23.7	23.1	24.2
4H	2H	21.4	22.7	21.9	23.2	23.8	20.9	22.3	21.5	22.8
	3H	23.4	24.5	23.9	25.1	25.7	22.5	23.7	23.1	24.2
	4H	24.4	25.4	25.0	26.0	26.6	23.2	24.2	23.7	24.8
	6H	25.3	26.2	25.9	26.8	27.5	23.6	24.5	24.2	25.1
	8H	25.8	26.6	26.4	27.3	27.9	23.8	24.6	24.4	25.2
	12H	26.2	27.0	26.9	27.6	28.3	23.8	24.6	24.4	25.2
8H	4H	24.7	25.5	25.3	26.1	26.8	23.6	24.4	24.2	25.0
	6H	25.9	26.6	26.5	27.2	27.9	24.2	24.9	24.9	25.6
	8H	26.4	27.1	27.1	27.7	28.4	24.5	25.1	25.1	25.7
	12H	27.0	27.5	27.7	28.2	29.0	24.6	25.1	25.2	25.8
12H	4H	24.7	25.4	25.3	26.0	26.8	23.6	24.4	24.3	25.0
	6H	25.9	26.5	26.5	27.1	27.9	24.4	25.0	25.0	25.6
	8H	26.5	27.1	27.2	27.7	28.5	24.7	25.2	25.3	25.9

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 349 B = 35	H(C0) = 17 H(C90) = 14	H(C180) = 17 H(C270) = 14
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
			Luminance in cd/m²					
45° 50° 55° 60°	γ	13915.6	13856.3	13899.8	14093.2	14521.7	15277.6	16623.3
		13237.0	13152.6	13146.4	13284.2	13655.5	14377.4	15809.7
		12580.8	12479.9	12418.5	12479.6	12776.0	13463.6	14963.9
		11949.4	11820.1	11711.6	11690.1	11894.3	12500.5	14074.7
65° 70° 75° 80° 85°	γ	11315.8	11172.2	11006.5	10895.0	10978.2	11455.5	13075.0
		10691.9	10525.1	10297.1	10074.7	9998.2	10288.7	11900.7
		10094.4	9900.1	9600.4	9237.1	8933.3	8906.0	10394.6
		9549.6	9335.8	8974.9	8451.1	7840.4	7291.4	8368.9
		9143.7	8920.5	8526.1	7887.5	6966.1	5677.4	5699.4

Photometric test report

Family
Powerbrik®

Order number: 51FC207A410AS
EAN: 4069025125057

LP number
55804_4

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

