
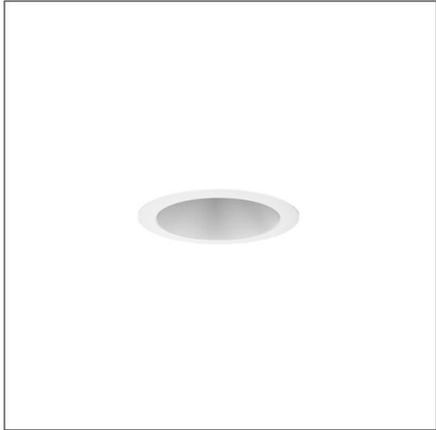


# Photometric test report

<b>Family</b> <b>Lunis 31</b>	<b>Order number: 51DN15EE41B</b> <b>EAN: 4069025151568</b>	<b>LP number</b> <b>59320_8</b>
	<b>Version</b>	Lens optics, wide distribution, UGR≤19
	<b>Lamps</b>	LED 4000 K   CRI ≥ 80
	<b>Controlgear</b>	ECG Multilumen
	<b>Setting</b>	factory setting: DIP-Step=2
<b>Rated values</b>	Net luminous flux = 1750 lm Power consumption = 12.2 W Luminous efficacy = 143.4 lm/W	<b>serial documentation</b> 12.12.2024
		

**Luminous intensity in cd/klm** C180-0 **Imax: 1069 cd/klm**

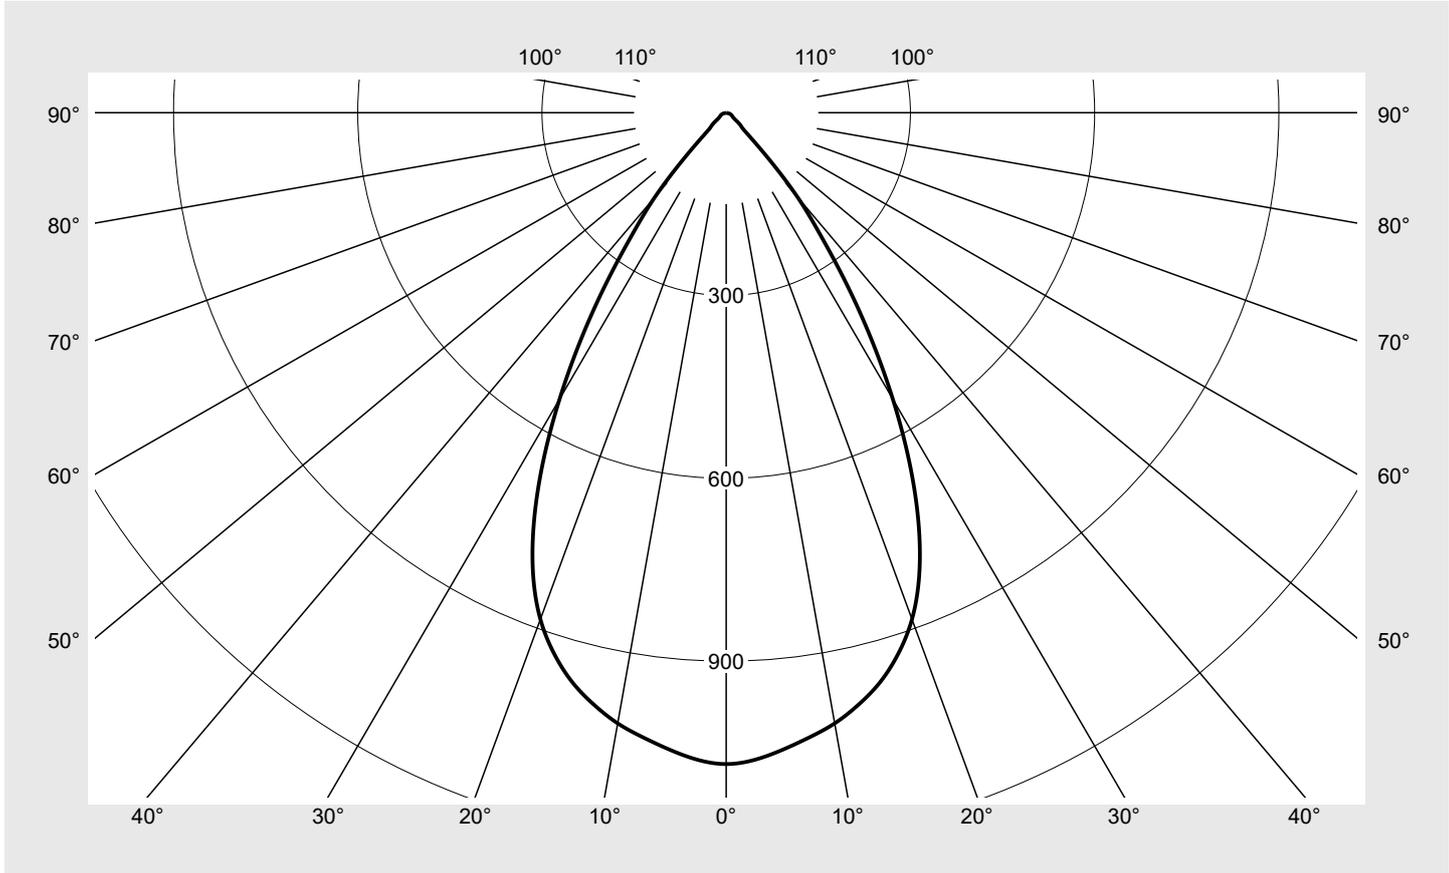

Classifications	
DIN 5040	A 7 0
CIE	N1=93 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Lunis 31</b>	Order number: <b>51DN15EE41B</b> EAN: <b>4069025151568</b>	LP number <b>59320_8</b>
---------------------------	---	-----------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1068.9	1.6	1.6
2,5°	1063.0	12.7	14.3
5,0°	1049.6	25.1	39.4
7,5°	1034.2	37.0	76.4
10,0°	1017.6	48.4	124.8
12,5°	995.1	59.0	183.9
15,0°	967.7	68.7	252.5
17,5°	931.2	76.8	329.3
20,0°	884.6	82.9	412.2
22,5°	821.4	86.2	498.4
25,0°	740.7	85.8	584.2
27,5°	645.8	81.7	666.0
30,0°	542.7	74.4	740.3
32,5°	438.6	64.6	805.0
35,0°	338.3	53.2	858.1
37,5°	249.5	41.6	899.8
40,0°	180.2	31.8	931.5
42,5°	100.5	18.6	950.1
45,0°	46.4	9.0	959.1
47,5°	33.4	6.8	965.9
50,0°	26.7	5.6	971.5
52,5°	18.0	3.9	975.4
55,0°	14.5	3.3	978.7
57,5°	12.6	2.9	981.6
60,0°	11.5	2.7	984.3
62,5°	10.6	2.6	986.9
65,0°	9.6	2.4	989.3
67,5°	8.5	2.2	991.5
70,0°	7.5	1.9	993.4
72,5°	6.5	1.7	995.1
75,0°	5.4	1.4	996.5
77,5°	4.5	1.2	997.7
80,0°	3.5	0.9	998.6
82,5°	2.6	0.7	999.3
85,0°	1.6	0.4	999.8
87,5°	0.8	0.2	1000.0
90,0°	0.1	0.0	1000.0

## Photometric test report

Family <b>Lunis 31</b>	Order number: <b>51DN15EE41B</b> EAN: <b>4069025151568</b>	LP number <b>59320_8</b>
---------------------------	---	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.8	18.0	17.2	18.3	18.7	16.8	18.0	17.2	18.3	18.7
	3H	16.8	17.9	17.2	18.2	18.6	16.8	17.9	17.2	18.2	18.6
	4H	16.8	17.8	17.2	18.2	18.5	16.8	17.8	17.2	18.2	18.5
	6H	16.9	17.7	17.3	18.1	18.5	16.9	17.7	17.3	18.1	18.5
	8H	17.0	17.7	17.4	18.1	18.5	17.0	17.7	17.4	18.1	18.5
	12H	17.0	17.6	17.4	18.0	18.4	17.0	17.6	17.4	18.0	18.4
4H	2H	16.7	17.6	17.1	18.0	18.4	16.7	17.6	17.1	18.0	18.4
	3H	16.7	17.5	17.1	17.9	18.3	16.7	17.5	17.1	17.9	18.3
	4H	16.8	17.5	17.2	17.9	18.3	16.8	17.5	17.2	17.9	18.3
	6H	16.8	17.4	17.3	17.8	18.3	16.8	17.4	17.3	17.8	18.3
	8H	16.8	17.4	17.3	17.8	18.3	16.8	17.4	17.3	17.8	18.3
	12H	16.9	17.3	17.4	17.8	18.3	16.9	17.3	17.4	17.8	18.3
8H	4H	16.7	17.2	17.2	17.7	18.2	16.7	17.2	17.2	17.7	18.2
	6H	16.8	17.2	17.3	17.7	18.2	16.8	17.2	17.3	17.7	18.2
	8H	16.8	17.2	17.3	17.7	18.2	16.8	17.2	17.3	17.7	18.2
	12H	16.9	17.2	17.4	17.7	18.2	16.9	17.2	17.4	17.7	18.2
12H	4H	16.7	17.1	17.2	17.6	18.1	16.7	17.1	17.2	17.6	18.1
	6H	16.8	17.1	17.3	17.6	18.2	16.8	17.1	17.3	17.6	18.2
	8H	16.8	17.1	17.4	17.6	18.2	16.8	17.1	17.4	17.6	18.2

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm: D = 146</b>
------------------------	---	--

<b>C-planes</b>	<b>0°</b>
$\gamma$	<b>Luminance in cd/m<sup>2</sup></b>
45,0°	6856.7
50,0°	4343.1
55,0°	2643.4
60,0°	2395.8
65,0°	2377.9
70,0°	2285.2
75,0°	2193.4
80,0°	2096.0
85,0°	1927.4

**Photometric test report**

<b>Family</b> Lunis 31	<b>Order number: 51DN15EE41B</b> <b>EAN: 4069025151568</b>	<b>LP number</b> 59320_8
---------------------------	---	-----------------------------

**Luminance values in cd/m<sup>2</sup>**


  $\gamma$  65°
 

  $\gamma$  70°
 

  $\gamma$  75°
 

  $\gamma$  80°
 

  $\gamma$  85°
 
siteco

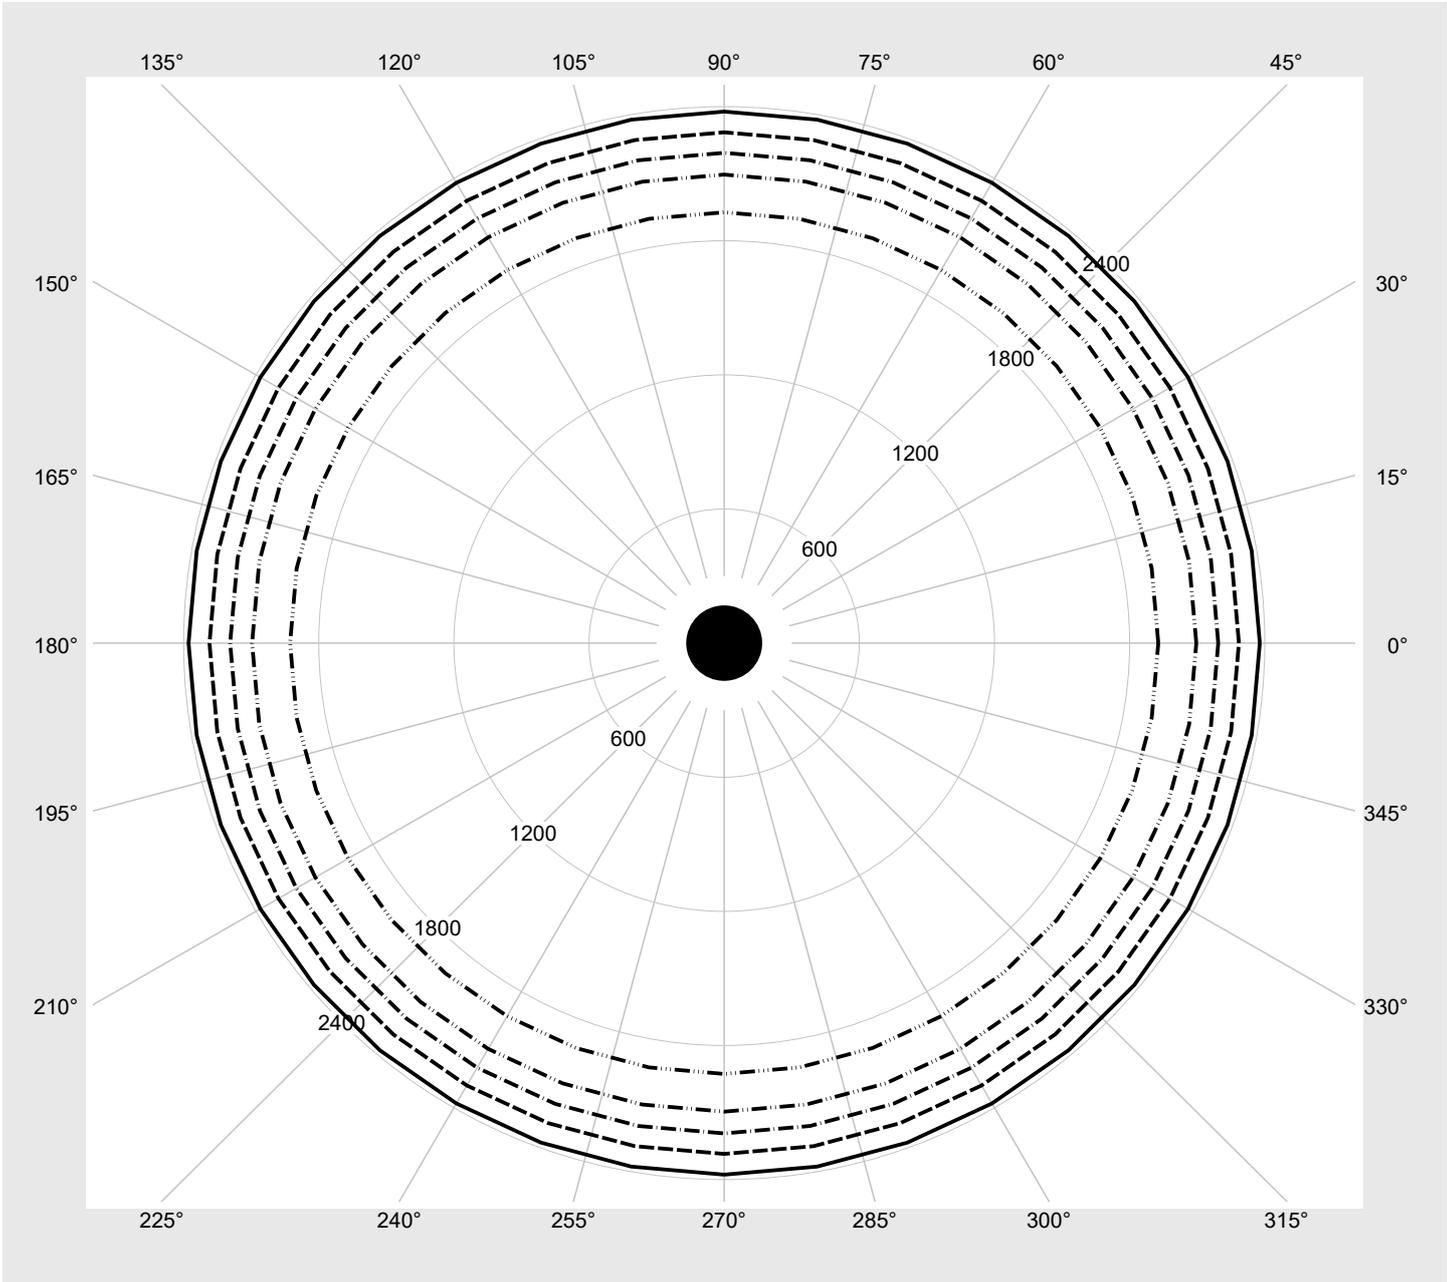

### Photometric test report

<b>Family</b> <b>Lunis 31</b>	<b>Order number: 51DN15EE41B</b> <b>EAN: 4069025151568</b>	<b>LP number</b> <b>59320_8</b>
----------------------------------	---	------------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
2	OFF	ON	1750	12.2
1	ON	OFF	1450	10.2
0	OFF	OFF	1150	8.2