


# Photometric test report

<b>Family</b> <b>Licross® 11 Protected</b>	<b>Order number: 51TP12DN49XGE</b> <b>EAN: 4069025315304</b>	<b>LP number</b> <b>58524_309</b>
	<b>Version</b> prismatic cover, frosted, extremely wide distribution, asymmetric extremely wide distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 9020 lm Power consumption = 51.0 W Luminous efficacy = 176.9 lm/W	<b>serial documentation</b> <b>27.01.2025</b>





**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 631 cd/klm**

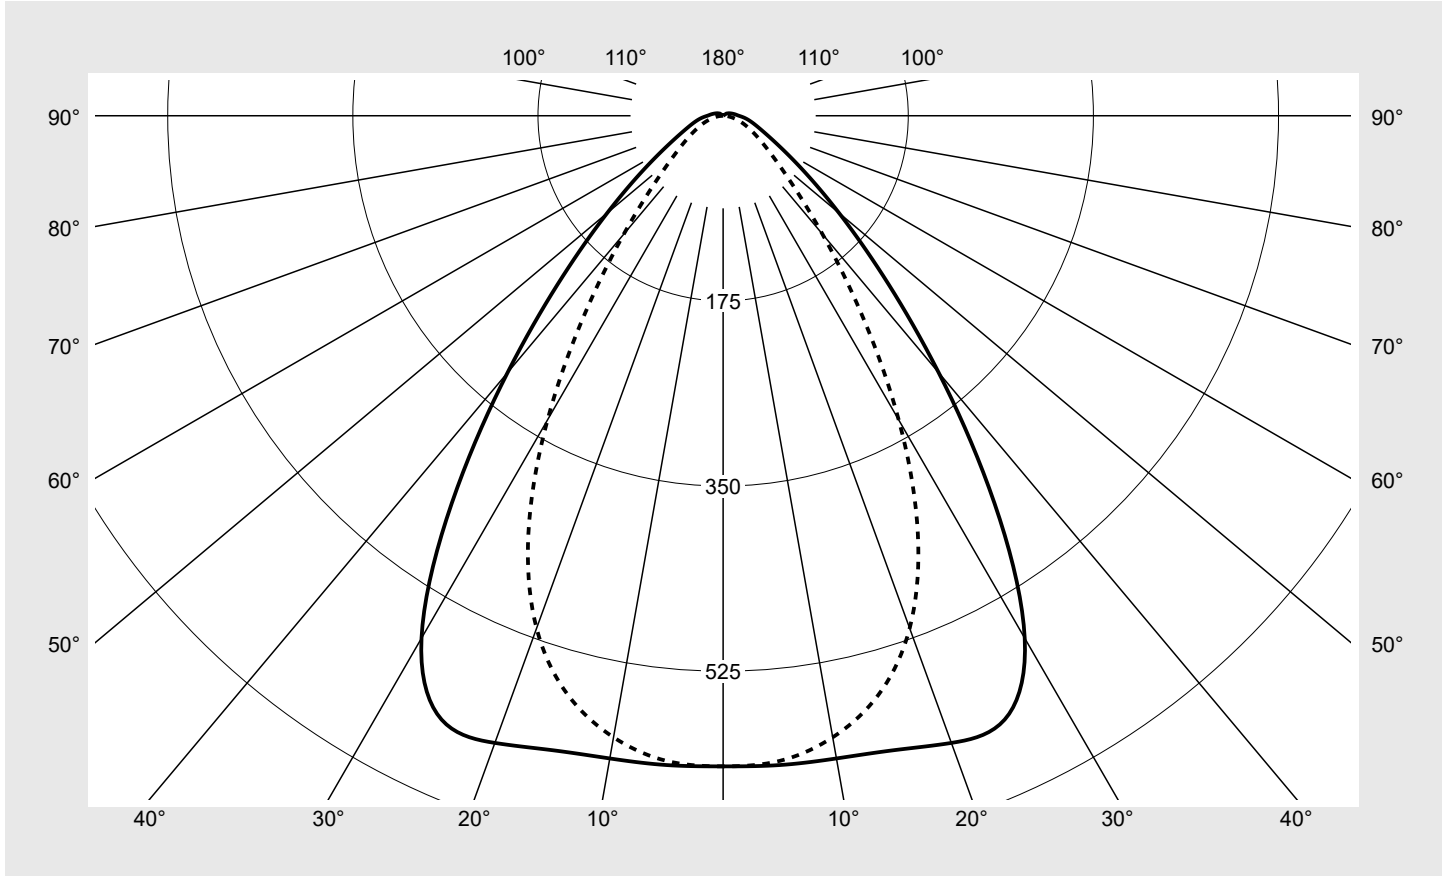

Classifications	
DIN 5040	A 5 1
CIE	N1=73 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	98.6%
$\phi_o$	1.4%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 11 Protected</b>	Order number: <b>51TP12DN49XGE</b> EAN: <b>4069025315304</b>	LP number <b>58524_309</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Protected	<b>Order number: 51TP12DN49XGE</b> <b>EAN: 4069025315304</b>	<b>LP number</b> 58524_309
--	---	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.9	22.3	21.3	22.6	23.0	17.7	19.1	18.0	19.4	19.7
	3H	21.3	22.6	21.7	22.9	23.3	18.0	19.3	18.4	19.6	20.0
	4H	21.6	22.7	22.0	23.1	23.5	18.2	19.4	18.6	19.7	20.1
	6H	21.9	22.9	22.3	23.3	23.7	18.3	19.4	18.7	19.8	20.1
	8H	22.1	23.0	22.5	23.4	23.8	18.4	19.4	18.8	19.8	20.2
	12H	22.3	23.1	22.7	23.5	23.9	18.4	19.3	18.8	19.7	20.2
4H	2H	21.0	22.2	21.4	22.5	22.9	18.2	19.3	18.6	19.7	20.1
	3H	21.5	22.5	21.9	22.9	23.3	18.7	19.6	19.1	20.0	20.4
	4H	21.9	22.7	22.3	23.1	23.6	18.9	19.8	19.3	20.2	20.6
	6H	22.3	23.0	22.7	23.4	23.9	19.1	19.8	19.5	20.3	20.7
	8H	22.5	23.2	23.0	23.6	24.1	19.1	19.8	19.6	20.3	20.8
	12H	22.8	23.4	23.3	23.8	24.3	19.2	19.8	19.7	20.3	20.8
8H	4H	21.9	22.6	22.3	23.0	23.5	19.1	19.8	19.6	20.2	20.7
	6H	22.4	22.9	22.9	23.4	23.9	19.4	20.0	19.9	20.4	20.9
	8H	22.7	23.2	23.2	23.7	24.2	19.5	20.0	20.0	20.5	21.0
	12H	23.1	23.5	23.6	24.0	24.5	19.6	20.0	20.1	20.5	21.1
12H	4H	21.9	22.5	22.3	22.9	23.4	19.2	19.7	19.7	20.2	20.7
	6H	22.4	22.9	22.9	23.3	23.9	19.5	20.0	20.0	20.4	21.0
	8H	22.7	23.1	23.2	23.6	24.2	19.6	20.1	20.2	20.6	21.1

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1480</b>	<b>H(C0) = 13</b>	<b>H(C180) = 13</b>
			<b>B = 78</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>


C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		20262.6	21535.1	23570.5	21221.1	15063.2	11188.4	10391.0	
50°		14508.5	15503.2	17314.8	15438.0	10804.0	8182.5	7786.9	
55°		10624.8	11304.6	12634.9	11088.4	7889.2	6372.9	6308.2	
60°		8129.8	8504.1	9279.2	8225.5	6111.5	5240.2	5385.3	
65°		6679.7	6807.9	7052.7	6310.0	5014.9	4508.8	4751.4	
70°		5940.0	5866.6	5634.9	5078.4	4323.3	3989.6	4286.0	
75°		5678.6	5417.0	4818.4	4281.3	3817.3	3538.3	3848.2	
80°		5740.7	5343.6	4483.9	3804.2	3434.8	3173.8	3421.1	
85°		6069.4	5608.4	4548.2	3730.0	3281.6	2900.8	3089.4	

**Photometric test report**

<b>Family</b> Licross® 11 Protected	<b>Order number: 51TP12DN49XGE</b> <b>EAN: 4069025315304</b>	<b>LP number</b> <b>58524_309</b>
--	---	--------------------------------------



**Luminance values in cd/m<sup>2</sup>**       $\gamma$  65°     $\gamma$  70°     $\gamma$  75°     $\gamma$  80°     $\gamma$  85°

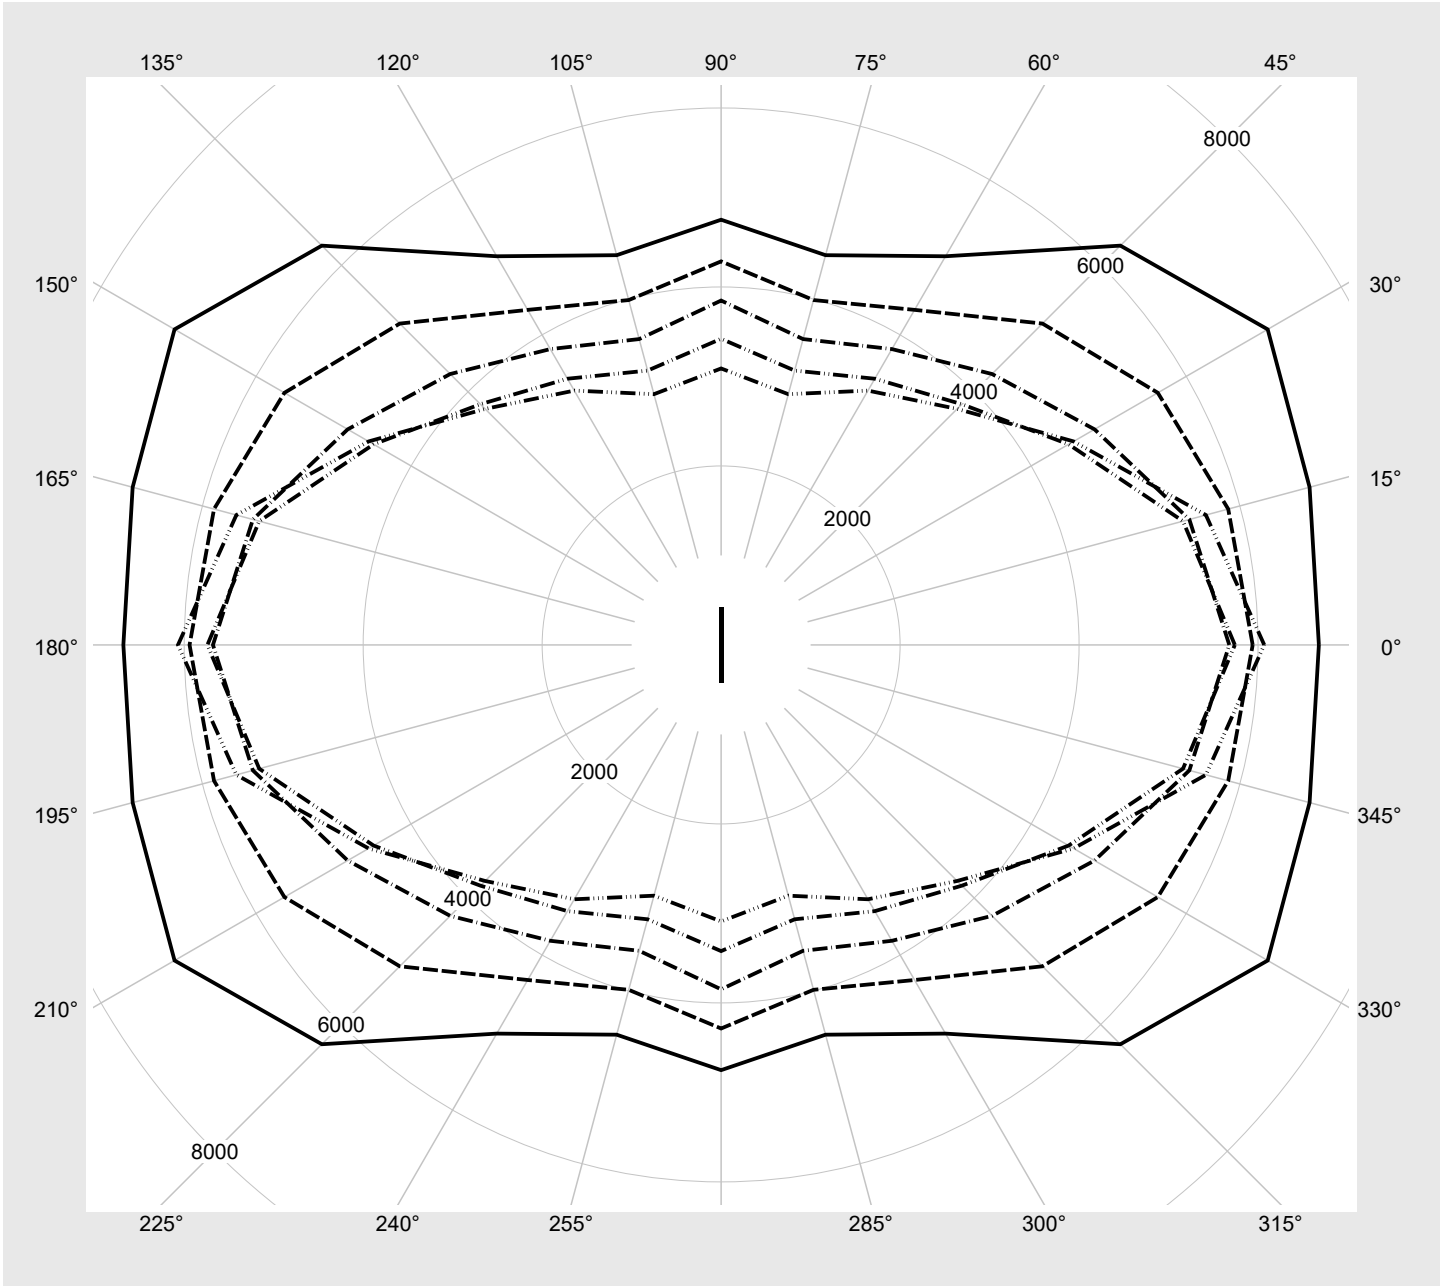

## Photometric test report

<b>Family</b> Licross® 11 Protected	<b>Order number: 51TP12DN49XGE</b> <b>EAN: 4069025315304</b>	<b>LP number</b> <b>58524_309</b>
--	---	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9020	51.0
95	240	252	8558	48.2
90	227	250	8125	45.6
85	213	248	7656	42.8
80	200	245	7217	40.2
75	187	243	6772	37.5
70	174	240	6327	35.0
65	161	237	5877	32.4
60	148	234	5425	29.8
55	135	231	4965	27.3
50	122	227	4504	24.8
45	110	223	4077	22.5
40	97	219	3609	20.1
35	85	214	3173	17.9
30	72	208	2696	15.5
25	60	201	2254	13.1
20	48	193	1809	10.8
15	36	182	1360	8.6
10	24	168	906	6.5
5	12	142	450	4.2
2	5	110	183	3.0