




# Photometric test report

<b>Family</b> <b>Highbay 11</b>	<b>Order number: 51HN12DB4LBA</b> <b>EAN: 4069025440549</b>	<b>LP number</b> <b>59710_350</b>
	<b>Version</b> primary light control with lens, PMMA, housing, white, wide distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Setting</b> AC-mode <b>Rated values</b> Net luminous flux = 26000 lm Power consumption = 125.4 W Luminous efficacy = 207.3 lm/W	<b>serial documentation</b> <b>18.03.2025</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 772 cd/klm**

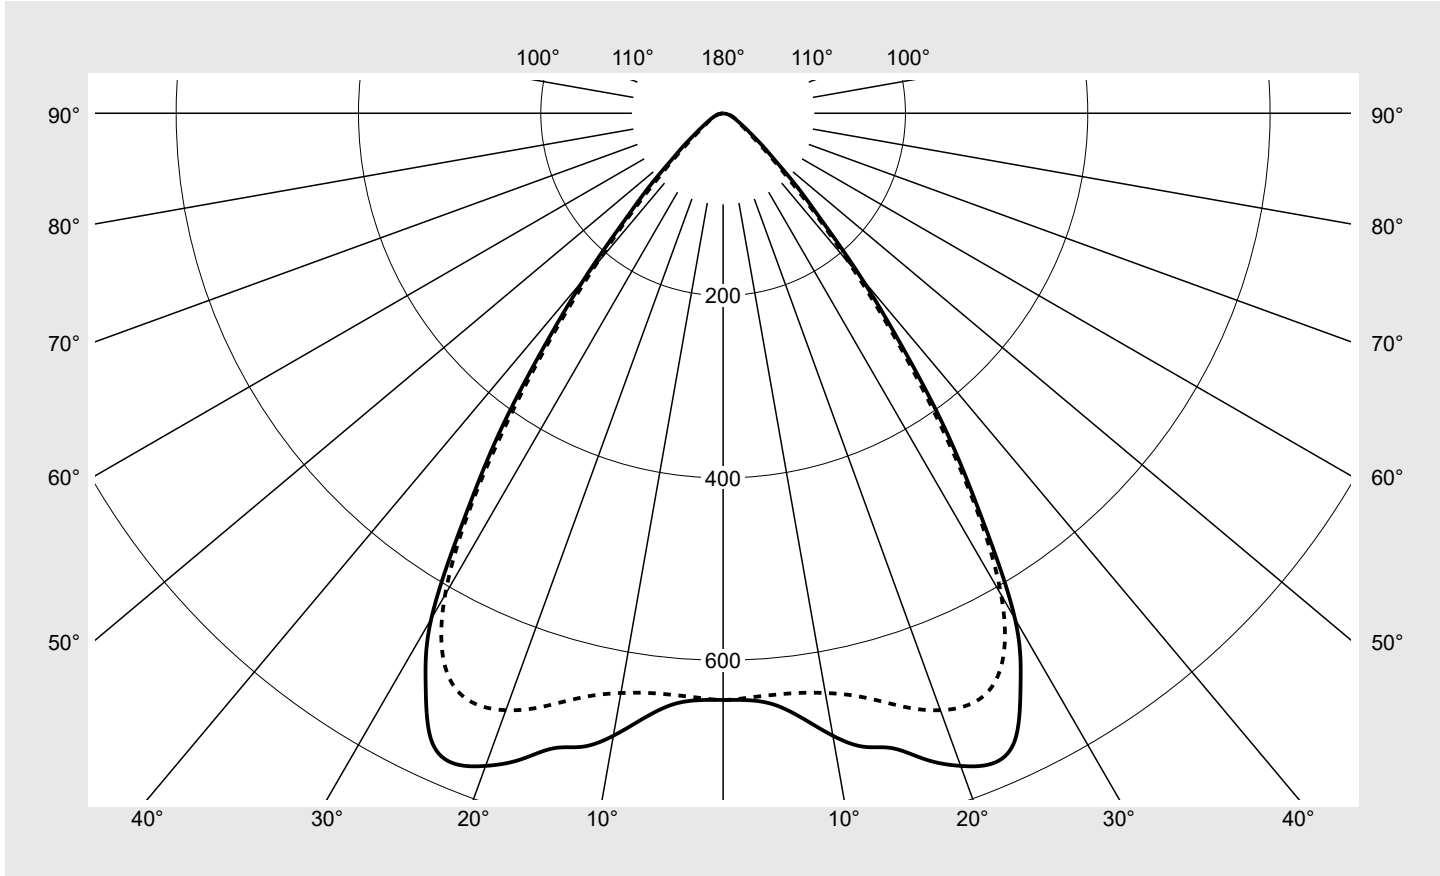

Classifications	
DIN 5040	A 6 0
CIE	N1=88 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 11	Order number: 51HN12DB4LBA EAN: 4069025440549	LP number 59710_350
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0,0°	643.6	643.6	643.6	643.6	643.6	643.6	643.6	1.0	1.0
2,5°	644.5	645.1	645.0	644.3	644.2	643.7	641.7	7.7	8.7
5,0°	651.5	652.3	650.7	647.5	645.3	643.2	640.4	15.5	24.1
7,5°	669.6	669.1	664.2	657.2	651.2	645.8	641.3	23.5	47.6
10,0°	693.4	691.0	681.5	670.0	659.9	651.2	645.8	31.9	79.6
12,5°	711.8	709.4	700.3	685.9	671.9	660.7	654.0	40.7	120.2
15,0°	721.3	721.7	717.1	704.9	689.4	675.9	667.7	49.7	169.9
17,5°	743.8	740.8	737.9	726.5	708.9	693.0	684.2	59.4	229.3
20,0°	761.9	761.9	759.6	745.2	724.0	705.6	696.8	69.2	298.5
22,5°	772.0	771.2	770.0	754.7	731.1	710.8	702.6	78.2	376.7
25,0°	758.1	756.6	756.3	743.6	722.7	703.3	695.6	85.1	461.8
27,5°	706.7	709.5	709.5	700.0	685.7	672.3	667.0	87.8	549.7
30,0°	640.4	635.6	633.7	626.6	621.7	614.1	609.9	85.8	635.5
32,5°	530.6	537.6	535.6	526.2	530.2	524.1	520.8	78.1	713.6
35,0°	428.2	426.4	425.9	411.9	420.8	414.2	411.4	66.0	779.6
37,5°	322.5	323.4	327.0	311.0	319.4	310.8	308.2	53.0	832.6
40,0°	236.1	234.0	241.6	230.8	230.9	219.8	218.4	40.7	873.3
42,5°	162.3	165.3	172.9	171.1	161.7	151.3	150.8	30.2	903.5
45,0°	117.3	114.9	119.4	122.5	109.3	102.6	102.3	21.9	925.4
47,5°	80.5	81.4	82.8	85.5	75.2	71.4	70.8	15.9	941.3
50,0°	59.4	58.0	58.0	59.0	52.9	50.5	49.6	11.7	953.0
52,5°	43.3	42.8	42.8	43.0	39.3	37.2	36.6	8.9	961.8
55,0°	33.3	32.4	32.9	33.7	30.5	28.7	28.3	7.1	968.9
57,5°	25.9	25.4	25.9	26.8	24.5	22.9	22.9	5.8	974.7
60,0°	20.9	20.2	21.2	21.8	20.4	18.9	19.2	4.9	979.5
62,5°	16.9	16.2	17.4	18.0	17.2	15.9	16.4	4.1	983.6
65,0°	14.9	13.6	14.4	15.1	14.8	13.6	14.4	3.6	987.2
67,5°	12.3	11.4	12.5	12.4	13.0	11.7	12.6	3.1	990.3
70,0°	10.4	9.5	10.5	10.1	11.1	10.1	11.0	2.7	993.0
72,5°	8.2	7.7	7.9	8.2	8.7	8.6	9.5	2.2	995.2
75,0°	6.5	6.0	6.0	6.4	6.6	7.1	7.9	1.7	996.9
77,5°	4.5	4.3	4.4	4.7	5.1	5.6	6.3	1.3	998.2
80,0°	2.9	2.7	2.9	3.1	3.5	4.1	4.7	0.9	999.1
82,5°	1.3	1.4	1.6	1.8	2.2	2.7	3.3	0.5	999.7
85,0°	0.6	0.6	0.6	0.7	1.0	1.4	1.8	0.3	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family Highbay 11	Order number: 51HN12DB4LBA EAN: 4069025440549	LP number 59710_350
----------------------	--	------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.4	20.7	19.8	21.0	21.3	19.1	20.4	19.5	20.7	21.0
	3H	19.4	20.6	19.8	20.9	21.2	19.1	20.3	19.5	20.6	21.0
	4H	19.4	20.5	19.8	20.8	21.2	19.2	20.2	19.6	20.6	20.9
	6H	19.4	20.3	19.8	20.7	21.1	19.2	20.1	19.6	20.5	20.9
	8H	19.5	20.3	19.9	20.6	21.1	19.3	20.1	19.7	20.5	20.9
	12H	19.4	20.2	19.9	20.6	21.0	19.3	20.0	19.7	20.4	20.8
4H	2H	19.3	20.4	19.7	20.7	21.1	19.0	20.1	19.4	20.4	20.8
	3H	19.4	20.2	19.8	20.6	21.0	19.1	20.0	19.5	20.4	20.8
	4H	19.4	20.1	19.8	20.5	21.0	19.2	19.9	19.6	20.3	20.8
	6H	19.3	20.0	19.8	20.4	20.9	19.2	19.8	19.7	20.3	20.7
	8H	19.3	19.9	19.8	20.3	20.8	19.2	19.8	19.7	20.2	20.7
	12H	19.3	19.8	19.8	20.3	20.8	19.3	19.7	19.7	20.2	20.7
8H	4H	19.3	19.9	19.8	20.3	20.8	19.1	19.7	19.6	20.1	20.6
	6H	19.3	19.7	19.8	20.2	20.7	19.1	19.6	19.6	20.1	20.6
	8H	19.2	19.6	19.7	20.1	20.7	19.2	19.6	19.7	20.1	20.6
	12H	19.2	19.5	19.7	20.0	20.6	19.2	19.5	19.7	20.0	20.6
12H	4H	19.3	19.8	19.8	20.2	20.7	19.1	19.6	19.6	20.0	20.5
	6H	19.3	19.6	19.8	20.1	20.7	19.1	19.5	19.7	20.0	20.5
	8H	19.2	19.5	19.8	20.1	20.6	19.2	19.5	19.7	20.0	20.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 852 B = 264
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	$\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m <sup>2</sup>								
45,0°		19179.4	18780.1	19521.6	20022.0	17862.3	16771.0	16721.6
50,0°		10686.0	10433.4	10422.4	10608.5	9519.5	9076.6	8920.8
55,0°		6715.6	6536.0	6629.3	6781.5	6151.7	5782.7	5713.2
60,0°		4830.2	4662.8	4899.3	5046.3	4724.7	4375.4	4431.1
65,0°		4075.7	3707.5	3951.7	4122.1	4036.5	3732.9	3943.8
70,0°		3503.1	3196.2	3535.5	3420.6	3752.5	3415.9	3730.5
75,0°		2886.9	2673.9	2666.7	2852.1	2963.3	3171.9	3535.9
80,0°		1949.1	1818.6	1924.5	2078.9	2346.5	2759.9	3146.0
85,0°		778.5	774.5	799.7	936.4	1384.6	1844.8	2389.9

**Photometric test report**


**Family**  
Highbay 11

**Order number: 51HN12DB4LBA**  
**EAN: 4069025440549**

**LP number**  
59710\_350

**Luminance values in cd/m<sup>2</sup>**

γ 65°    γ 70°    γ 75°    γ 80°    γ 85°

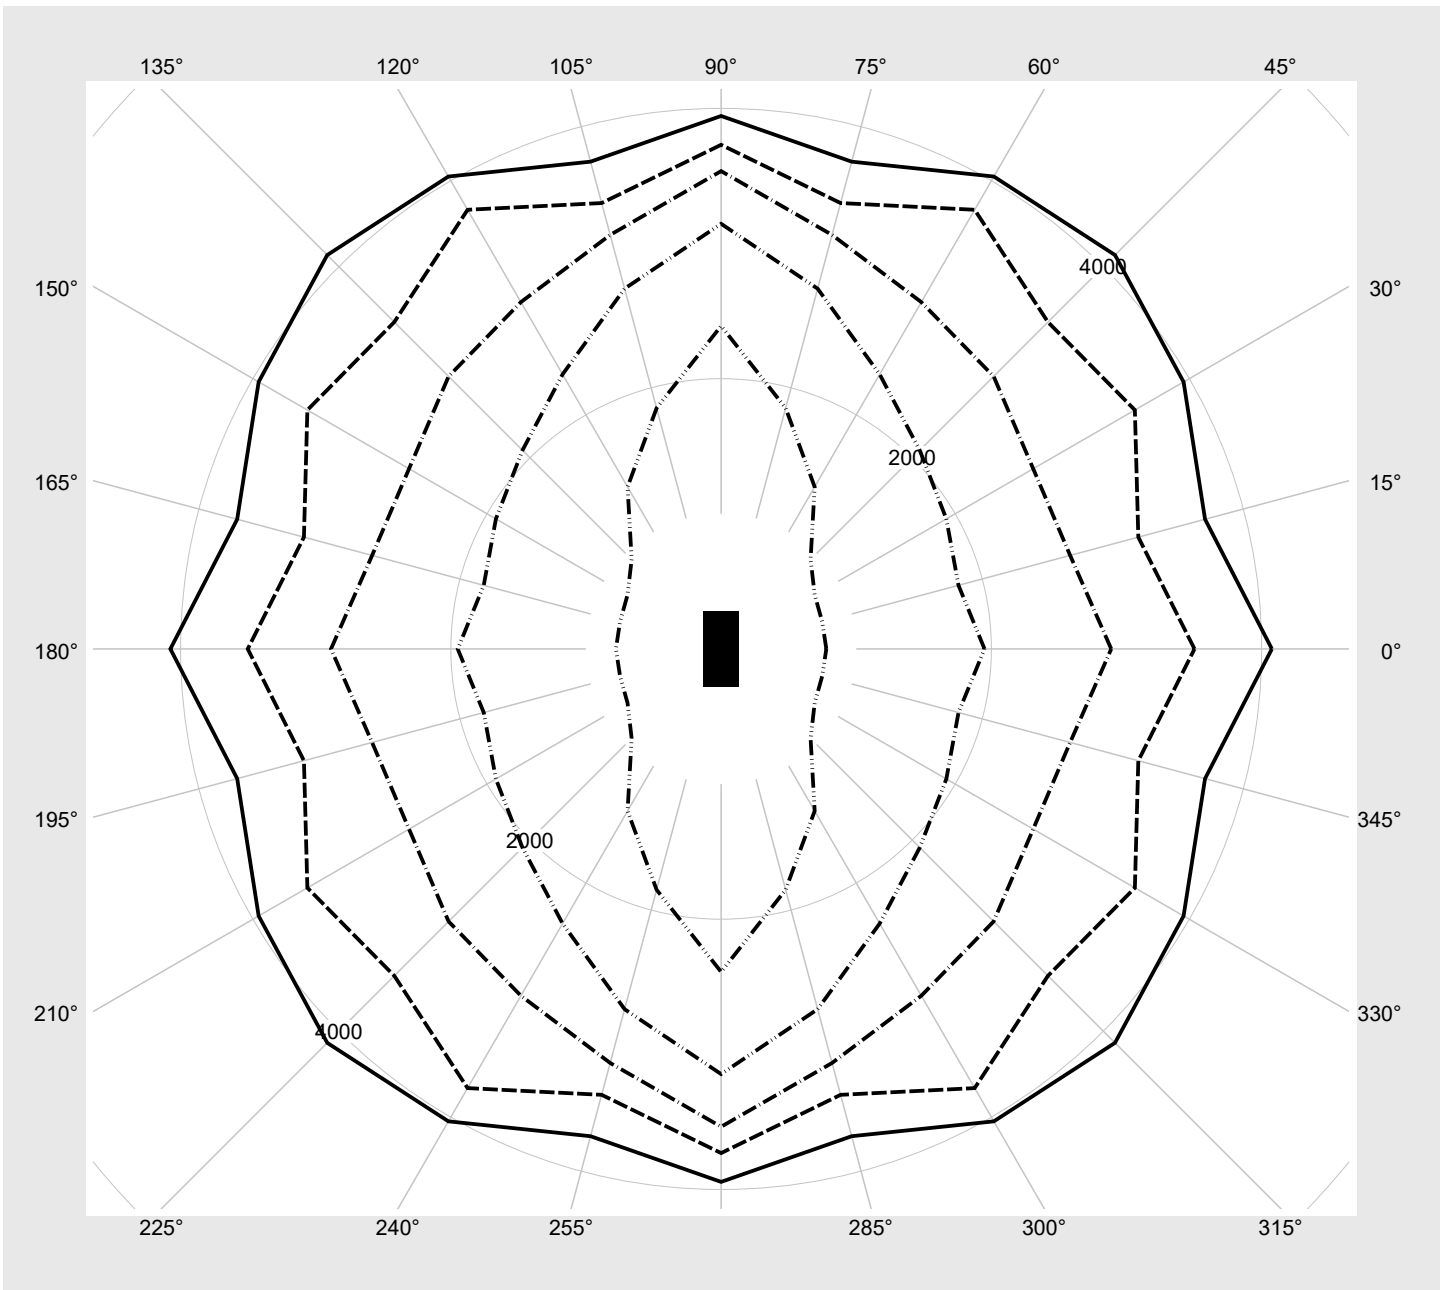

## Photometric test report

Family Highbay 11	Order number: 51HN12DB4LBA EAN: 4069025440549	LP number 59710_350
----------------------	--	------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	26000	125.4
95	241	252	24724	118.7
90	228	250	23439	112.2
85	214	248	22054	105.2
80	201	245	20755	98.6
75	188	243	19459	92.2
70	175	240	18155	85.7
65	163	238	16943	79.9
60	150	235	15629	73.4
55	137	231	14297	66.9
50	124	228	12968	60.7
45	112	224	11732	54.7
40	99	219	10381	48.4
35	87	215	9132	42.7
30	74	209	7766	36.5
25	62	202	6501	30.8
20	50	194	5232	25.1
15	38	184	3949	19.5
10	25	169	2558	13.3
5	13	145	1260	7.4
2	6	117	502	4.0