

Photometric test report

Family
Silica® 21 Floor

Order number: 51MX53DA3ZM00992XX
EAN: 4069025333797

LP number
59648_14

serial
documentation
09.04.2025



Version floorstanding upright, with homogeneous illumination, prismatic cover, indirect-/ direct distribution, extremely wide distribution, with presence- and daylightsensor

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Setting individual position: only indirect light

Rated values Net luminous flux = 10000 lm
Power consumption = 64.1 W
Luminous efficacy = 156 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 289 cd/klm

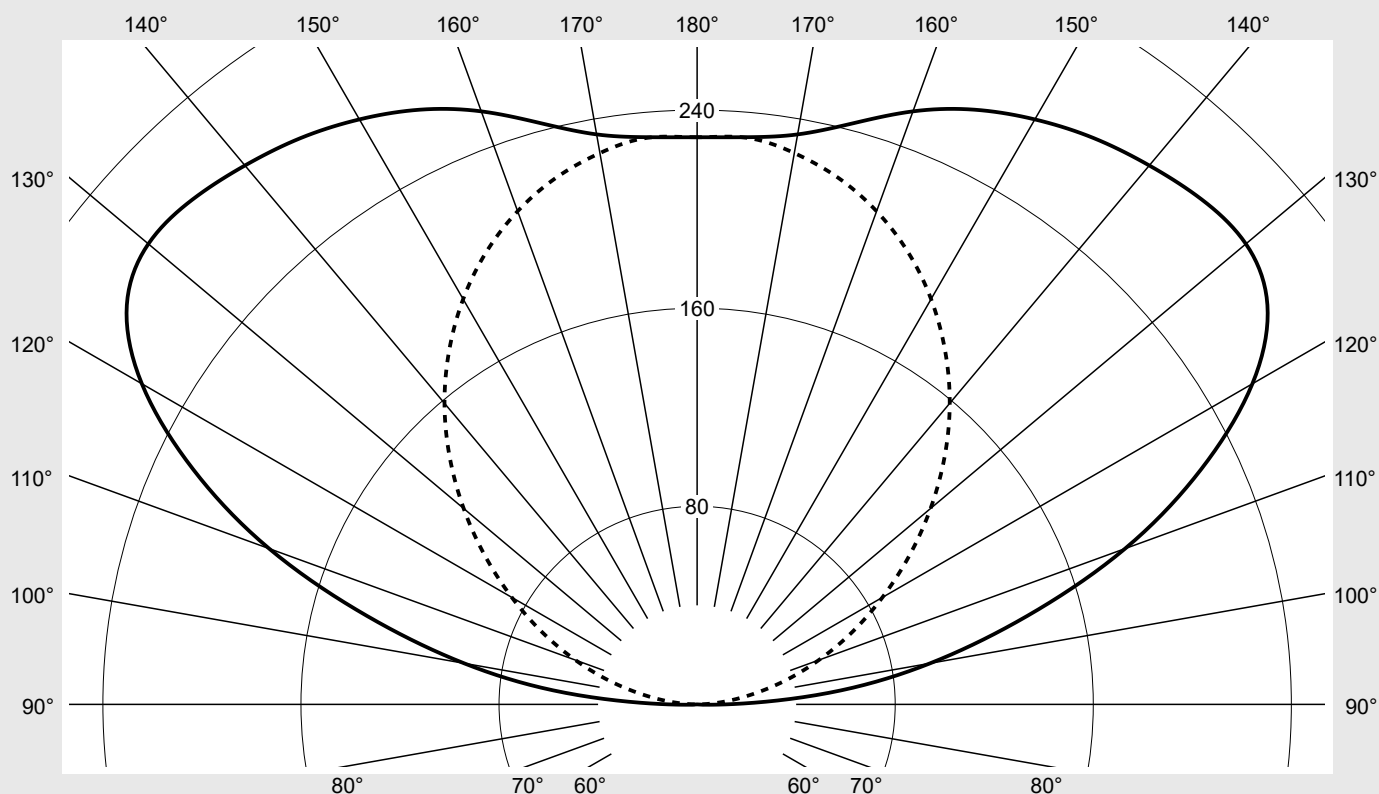

Classifications

DIN 5040 E 1 2
CIE N1=0 N2=0 N3=0
N4=0 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 0.3%
 ϕ_o 99.7%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 Floor	Order number: 51MX53DA3ZM00992XX EAN: 4069025333797	LP number 59648_14
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.9	0.9	0.9	0.8	0.7	0.7	0.7	0.4	0.4
90°	11.5	11.2	11.8	11.6	6.9	2.4	0.9	4.6	5.0
95°	53.3	54.6	58.7	55.5	35.6	18.2	9.4	23.1	28.1
100°	95.6	98.1	99.0	86.8	58.3	33.0	21.6	39.0	67.1
105°	138.1	140.4	137.2	117.3	80.1	49.7	36.5	54.0	121.1
110°	184.0	185.7	173.9	143.9	103.1	67.2	52.3	68.0	189.1
115°	224.6	223.0	205.9	169.1	125.1	85.0	69.1	79.1	268.2
120°	259.0	254.8	232.1	190.2	145.4	102.1	86.4	86.8	355.0
125°	281.2	275.1	248.8	207.4	162.0	118.7	104.6	90.2	445.2
130°	289.3	283.0	256.4	219.1	175.3	134.9	123.1	89.2	534.4
135°	288.3	283.0	259.3	227.1	186.9	150.6	141.4	85.4	619.8
140°	284.1	280.3	260.5	231.9	196.2	165.7	158.7	79.6	699.4
145°	279.2	276.5	259.8	234.5	203.5	179.7	174.6	72.4	771.8
150°	272.8	270.9	256.5	235.2	209.8	192.5	189.0	63.8	835.5
155°	265.0	263.6	251.0	233.7	215.0	203.7	201.5	54.1	889.6
160°	254.9	254.0	243.6	231.0	219.4	213.1	211.9	43.6	933.2
165°	242.9	242.8	235.7	229.0	223.3	220.4	220.2	32.7	965.9
170°	233.7	234.5	230.6	228.3	226.5	225.7	226.1	21.8	987.7
175°	229.9	230.9	228.6	228.5	228.4	228.9	229.7	10.9	998.6
180°	229.0	229.0	229.0	229.0	229.0	229.0	229.0	1.4	1000.0

Photometric test report

Family Silica® 21 Floor	Order number: 51MX53DA3ZM00992XX EAN: 4069025333797	LP number 59648_14
UGR-Table	Standard room	siteco
The UGR formula for this luminaire type cannot be used, see LiTG Publication 20: "The UGR - Process for Evaluation of Direct Glare of Artificial Lighting in Indoor Rooms"		

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1200 B = 50	
C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	1774.6	1723.0	1636.9	1483.9	1348.2	1262.1	1262.1

Photometric test report

Family
Silica® 21 Floor

Order number: 51MX53DA3ZM00992XX
EAN: 4069025333797

LP number
59648_14

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

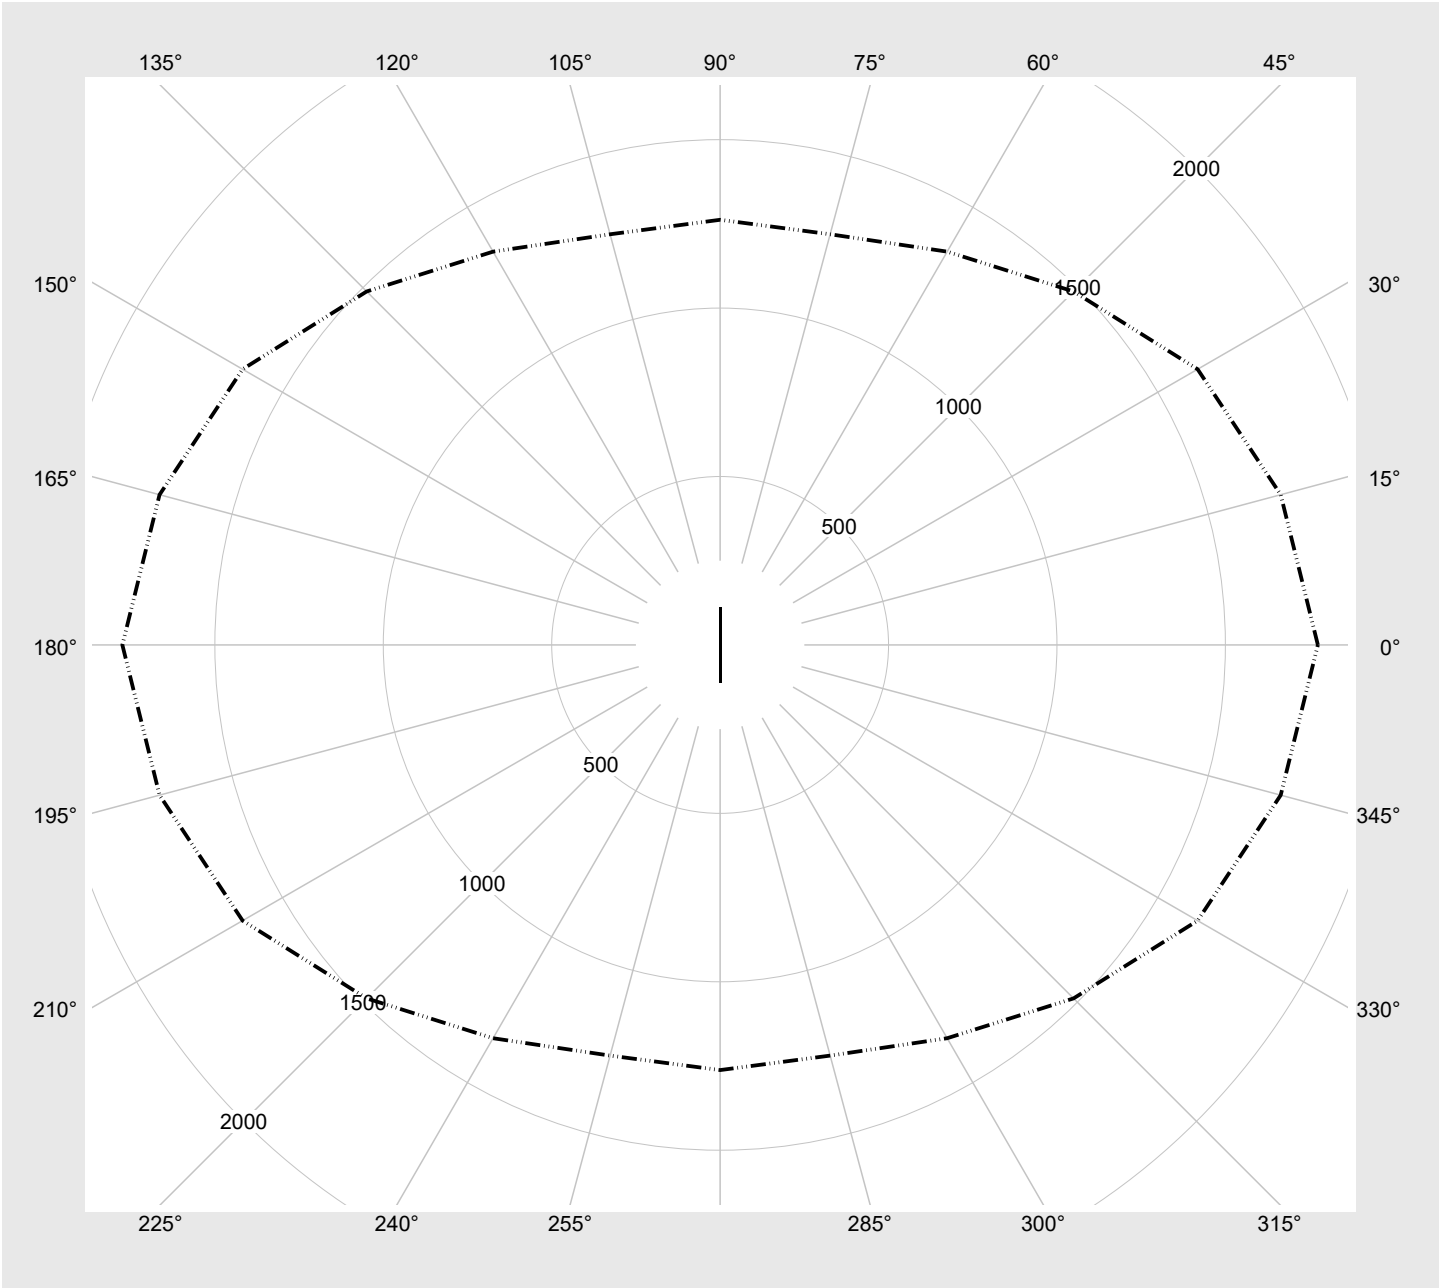

Photometric test report

Family Silica® 21 Floor	Order number: 51MX53DA3ZM00992XX EAN: 4069025333797	LP number 59648_14
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	10000	64.1
95	240	252	9490	60.7
90	227	250	9010	57.3
85	213	248	8490	53.8
80	200	245	8002	50.5
75	187	243	7510	47.4
70	174	240	7015	44.1
65	161	237	6515	40.9
60	148	234	6010	37.7
55	135	231	5501	34.5
50	122	227	4988	31.3
45	110	223	4512	28.4
40	97	219	3989	25.4
35	85	214	3505	22.5
30	73	208	3017	19.6
25	60	201	2483	16.5
20	48	193	1990	13.9
15	36	182	1493	11.2
10	24	168	993	8.4
5	12	142	488	5.2
2	4	102	151	3.2