


Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
	Version post-top or side-entry mounting Optic asymmetric distribution (PL32) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO Rated values Net luminous flux = 1510 lm Power consumption = 10.3 W Luminous efficacy = 146.6 lm/W	serial documentation 21.08.2025



Luminous intensity in cd/klm C180-0 C245-65 C250-70 C270-90 **Imax: 1590 cd/klm**

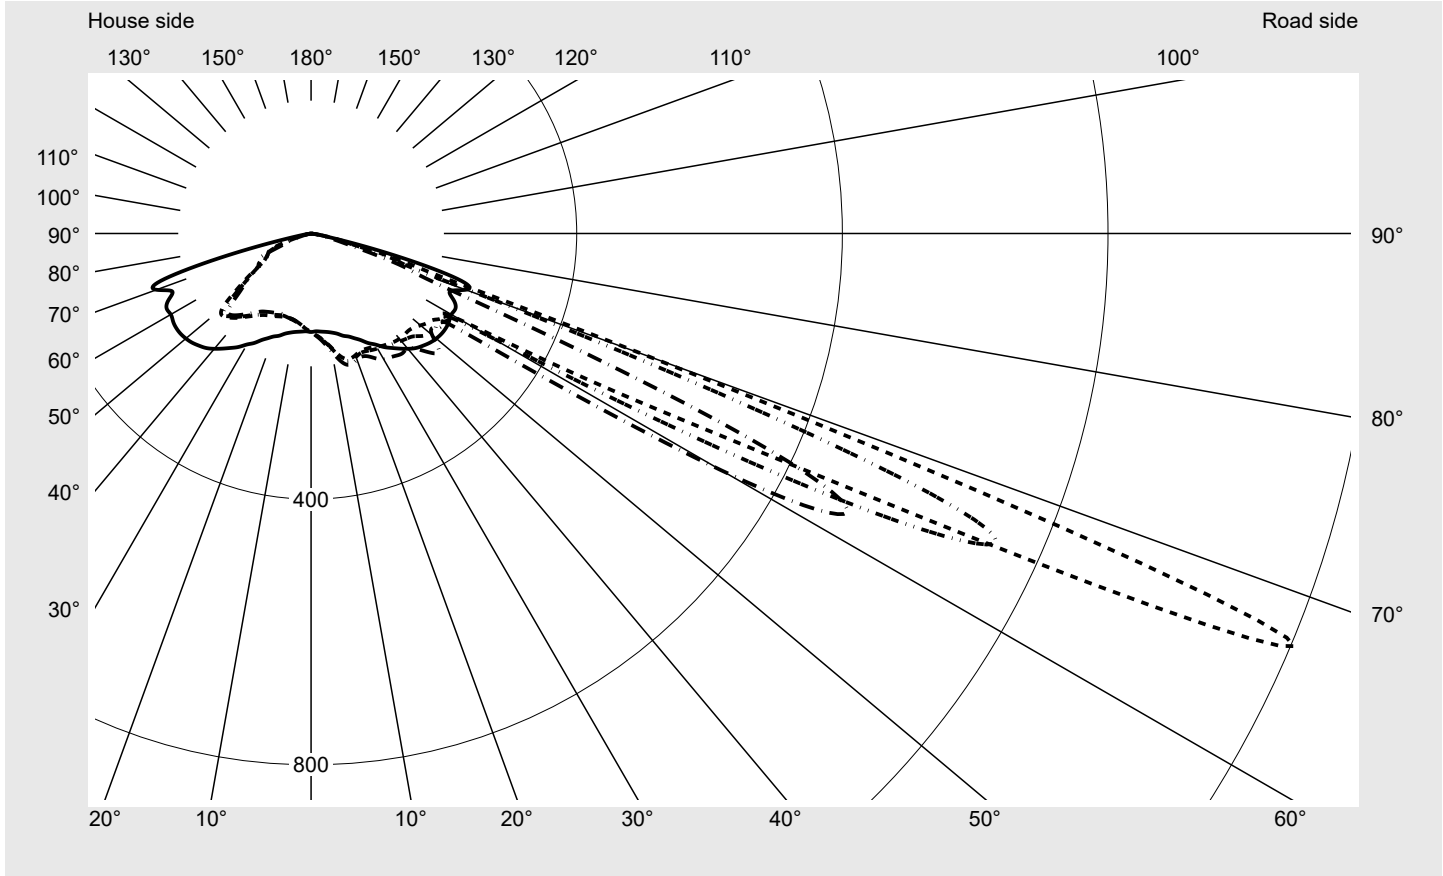

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	732.5
Imax 80°	42.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
---------------------------------------	--	--------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

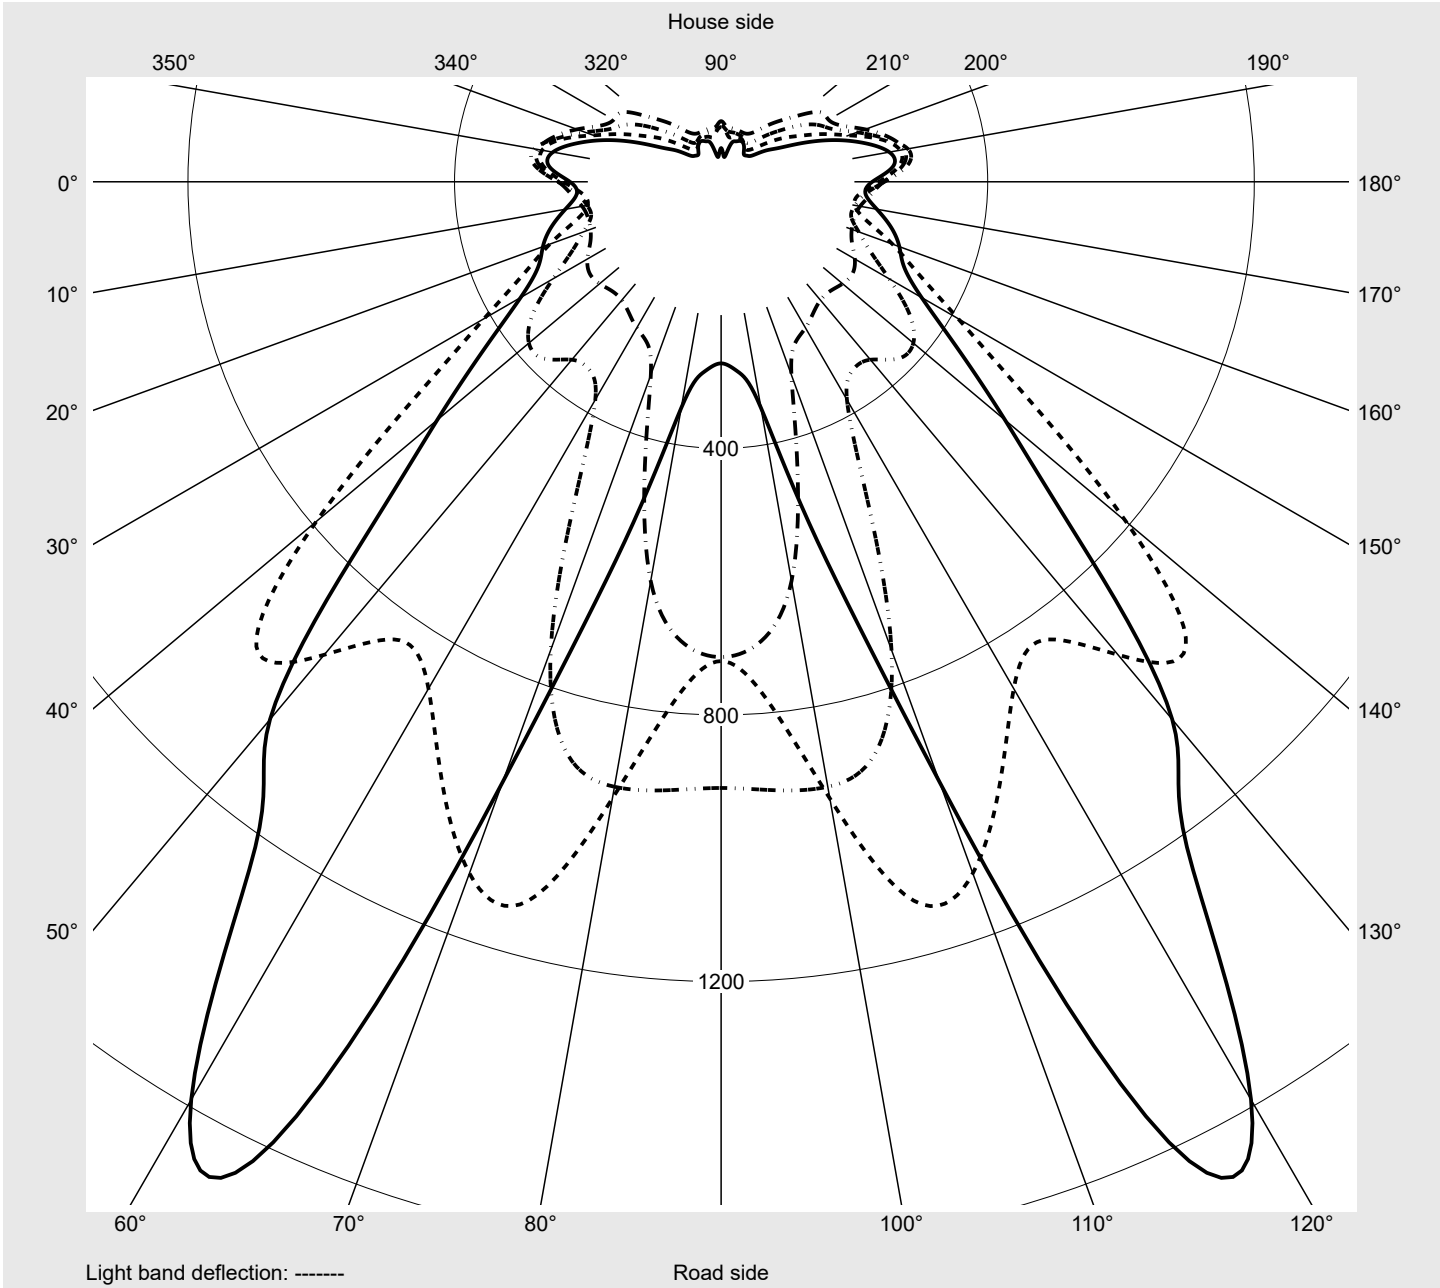

Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	147.5	147.7	148.2	148.8	149.3	149.7	150.1	150.5	151.0	151.2	151.6	152.0	152.3
5,0°	148.1	148.8	149.6	150.5	151.5	152.4	153.2	153.9	154.7	155.3	155.9	156.5	157.1
7,5°	149.3	150.3	151.6	152.8	154.2	155.5	156.6	157.8	159.2	160.4	161.7	162.9	164.0
10,0°	150.8	152.3	153.6	155.1	156.9	158.6	160.3	162.3	164.5	166.7	168.7	170.7	172.7
12,5°	153.2	154.9	156.6	158.7	161.0	163.3	165.3	167.1	169.4	172.2	175.8	179.6	183.1
15,0°	156.6	158.5	160.8	163.5	166.3	169.0	171.4	173.6	175.7	177.6	180.4	185.5	191.1
17,5°	161.5	163.7	165.7	168.4	171.4	174.3	177.0	179.5	181.8	183.8	185.5	187.5	192.4
20,0°	165.1	168.5	171.0	174.1	176.3	178.8	181.5	183.8	186.0	187.6	188.7	189.3	190.8
22,5°	170.7	173.7	176.7	179.6	182.3	183.8	185.7	187.4	188.8	189.6	190.1	190.2	190.2
25,0°	177.2	180.3	182.5	185.8	188.3	189.3	190.1	191.0	191.1	191.4	191.6	192.0	191.8
27,5°	185.9	187.9	189.7	191.7	194.6	195.2	194.7	194.3	194.0	193.7	193.9	193.9	193.7
30,0°	193.0	195.9	197.3	198.4	199.8	200.4	199.0	197.8	197.0	196.3	196.3	195.7	195.6
32,5°	202.5	203.8	204.8	205.0	204.9	205.6	203.7	201.6	199.4	198.4	198.6	198.6	199.0
35,0°	210.3	211.7	211.9	210.9	210.1	210.0	208.0	204.8	201.9	200.3	200.6	200.9	201.8
37,5°	218.4	218.5	218.4	216.2	214.8	213.6	210.9	207.5	204.3	202.5	202.1	202.7	204.0
40,0°	226.6	225.1	223.4	220.3	218.2	215.7	213.8	210.8	207.0	204.7	204.0	204.1	205.2
42,5°	233.9	229.3	226.2	222.7	220.0	216.1	214.2	213.0	209.1	206.7	205.1	204.2	205.2
45,0°	238.8	233.5	229.0	224.6	221.7	216.2	212.8	211.8	211.0	208.6	204.5	203.3	204.4
47,5°	243.2	236.1	230.3	225.1	221.5	216.3	212.1	210.9	212.5	209.4	204.2	202.8	204.8
50,0°	246.0	237.2	229.9	225.1	220.2	215.7	212.4	211.6	213.0	212.0	205.2	203.7	207.3
52,5°	247.8	236.6	228.3	223.7	218.6	215.2	213.5	211.8	210.7	212.9	207.8	206.9	211.4
55,0°	247.9	234.2	225.4	219.4	216.5	215.7	216.1	213.7	212.2	214.1	211.4	211.0	218.0
57,5°	246.4	228.9	221.1	214.7	212.3	214.4	219.6	220.1	220.0	219.1	218.0	220.4	228.4
60,0°	243.9	225.0	211.8	206.9	208.6	216.7	231.6	240.5	237.9	231.7	231.9	240.8	253.2
62,5°	245.1	216.4	204.0	202.1	219.7	247.1	291.2	344.6	376.5	375.3	348.5	344.6	377.6
65,0°	236.7	208.7	203.4	226.2	273.6	326.7	410.6	554.3	792.9	986.2	926.4	839.9	878.2
67,5°	226.9	217.7	237.4	264.1	284.6	303.0	347.4	430.5	556.2	758.6	1053.1	1218.6	1590.2
70,0°	247.8	237.5	209.5	169.9	135.0	120.2	130.6	174.7	263.5	365.7	478.5	659.1	732.5
72,5°	237.4	161.0	89.1	48.3	32.5	27.6	30.4	46.4	88.7	160.3	213.7	229.6	201.1
75,0°	143.2	55.4	21.7	14.2	13.6	13.8	14.9	18.8	28.2	61.4	101.5	106.9	95.1
77,5°	47.8	12.0	8.4	8.7	8.8	9.4	9.5	11.9	15.3	23.0	44.7	49.6	46.2
80,0°	13.7	5.3	5.2	5.5	5.6	5.7	6.0	6.7	8.9	11.1	18.7	22.1	20.1
82,5°	3.8	2.8	2.8	2.9	3.1	3.2	3.2	3.4	4.4	5.6	6.8	8.0	8.3
85,0°	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.4	1.5	1.8	1.8	2.0	2.1
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	152.7	153.0	153.2	153.2	153.4	153.5	147.3	146.7	146.6	146.4	146.0	145.8	145.7
5,0°	157.7	158.3	158.9	159.4	159.7	159.8	147.5	146.6	145.9	145.4	144.6	143.9	143.4
7,5°	164.8	165.6	166.6	167.6	168.5	168.9	148.1	146.7	145.7	144.6	143.5	142.5	141.5
10,0°	174.1	175.2	176.1	177.8	179.7	180.5	149.0	147.3	145.9	144.4	143.0	141.7	140.4
12,5°	186.1	188.0	188.5	190.1	192.9	194.3	150.8	148.8	147.0	145.2	143.5	141.9	140.2
15,0°	194.9	198.0	198.7	199.3	202.4	204.2	154.3	152.0	150.0	147.7	145.6	143.7	141.8
17,5°	197.2	200.0	201.4	200.6	203.1	205.6	158.6	155.9	153.1	150.5	148.2	146.3	144.5
20,0°	195.1	197.8	199.4	199.1	199.8	202.0	161.7	159.2	156.4	153.9	151.3	148.9	146.6
22,5°	192.1	194.9	196.8	197.2	198.2	200.5	166.8	164.9	162.7	159.7	156.7	153.4	150.1
25,0°	192.1	195.5	198.7	199.8	200.6	204.2	174.1	171.6	170.1	166.6	162.7	158.2	153.9
27,5°	193.7	197.8	203.2	205.9	206.1	212.2	182.4	180.0	177.2	174.5	169.6	164.3	158.6
30,0°	196.7	200.2	207.1	210.2	209.8	218.5	190.8	188.8	185.8	181.5	177.2	170.1	163.2
32,5°	200.4	202.9	207.4	209.5	209.7	221.2	199.9	198.2	195.3	190.2	183.6	177.8	169.1
35,0°	202.9	205.8	207.0	209.1	210.0	224.4	209.9	208.8	206.0	200.2	191.7	183.5	177.5
37,5°	205.5	207.9	208.8	209.9	211.5	226.8	219.1	219.1	216.5	210.2	201.5	192.0	184.1
40,0°	207.0	211.0	212.6	213.1	218.3	225.8	228.5	229.5	227.3	220.6	211.3	201.3	193.2
42,5°	207.4	214.2	217.3	222.1	232.8	235.9	237.6	239.8	238.5	230.8	220.7	210.2	201.3
45,0°	207.1	218.9	229.5	232.8	249.5	253.7	244.8	249.2	248.9	240.5	228.6	216.9	207.7
47,5°	209.7	228.2	240.7	241.1	256.8	261.3	251.4	257.6	256.9	247.5	234.2	221.7	212.8
50,0°	215.2	234.1	242.8	237.7	238.9	238.1	257.2	265.4	263.4	251.7	236.4	223.8	214.8
52,5°	220.9	235.8	236.6	229.8	233.4	232.8	261.7	271.8	267.6	251.8	235.1	223.1	213.7
55,0°	226.4	234.2	231.6	229.7	237.8	239.0	266.0	276.0	268.4	248.8	227.1	214.3	207.5
57,5°	233.5	241.3	246.5	256.4	286.3	304.6	270.1	278.4	265.8	240.1	211.7	198.4	196.3
60,0°	265.0	308.4	442.0	608.3	691.7	713.1	273.1	279.1	259.9	230.0	199.5	186.2	181.8
62,5°	512.4	747.5	889.7	921.7	916.4	909.5	280.5	284.4	253.3	217.1	186.3	169.9	148.4
65,0°	991.5	1104.2	1116.7	939.4	778.8	719.2	267.7	272.8	247.1	203.7	169.4	138.4	114.7
67,5°	1590.2	958.6	558.5	344.6	285.8	272.4	258.6	256.3	223.6	182.9	139.3	102.3	81.7
70,0°	537.1	294.1	225.4	185.0	161.2	154.1	255.2	236.8	199.7	151.2	100.0	71.6	52.6
72,5°	165.8	135.8	113.3	93.1	80.6	77.3	268.9	225.8	168.3	106.4	67.9	42.9	32.0
75,0°	81.3	69.7	58.1	47.9	41.3	39.0	209.6	194.3	131.3	68.9	39.4	24.4	21.9
77,5°	41.1	35.1	29.8	23.1	20.4	19.4	113.2	119.8	81.1	38.2	18.0	12.0	10.3
80,0°	19.4	18.5	14.4	12.2	10.1	9.5	35.9	42.5	34.6	17.3	8.0	5.5	5.5
82,5°	9.4	8.3	6.4	5.4	4.6	4.3	5.9	6.3	6.7	4.6	3.1	2.9	2.8
85,0°	2.8	2.5	2.1	1.7	1.6	1.6	1.2	1.2	1.3	1.3	1.2	1.2	1.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	0.2	0.2
2,5°	145.4	145.3	145.0	144.9	144.8	144.7	144.6	144.6	144.7	144.9	144.9	1.8	2.0
5,0°	142.7	142.2	141.7	141.3	140.9	140.6	140.4	140.3	140.3	140.3	140.3	3.6	5.6
7,5°	140.6	139.6	138.8	138.1	137.6	137.0	136.8	136.6	136.6	136.5	136.5	5.4	10.9
10,0°	139.1	138.0	136.9	136.1	135.2	134.5	133.9	133.6	133.7	133.7	133.6	7.3	18.2
12,5°	138.7	137.3	136.1	134.9	133.7	132.7	131.9	131.5	131.4	131.8	131.8	9.3	27.5
15,0°	140.0	138.1	136.2	134.7	133.4	132.2	131.4	131.0	130.7	130.7	130.7	11.4	38.8
17,5°	142.5	140.2	138.4	136.2	134.2	132.2	130.6	129.3	128.7	128.6	128.8	13.4	52.3
20,0°	144.2	141.9	140.0	137.4	135.3	133.0	131.0	129.5	128.6	128.3	128.7	15.4	67.7
22,5°	147.1	144.0	141.1	138.8	137.2	134.9	132.7	130.9	129.7	129.2	129.8	17.5	85.2
25,0°	150.2	146.7	143.4	140.7	138.4	136.9	134.9	132.9	131.3	130.7	131.5	19.8	105.0
27,5°	153.7	149.7	146.2	143.2	140.7	139.1	137.1	135.3	133.7	132.7	133.4	22.2	127.1
30,0°	157.3	153.1	149.3	146.2	143.5	141.8	140.3	138.2	136.7	135.6	136.0	24.6	151.7
32,5°	162.1	157.6	154.1	150.9	147.7	146.0	144.9	142.3	140.4	139.2	139.3	27.1	178.9
35,0°	169.0	164.0	160.6	157.1	153.9	151.5	149.5	147.5	145.4	144.5	145.2	29.8	208.7
37,5°	178.8	171.9	168.3	164.4	160.7	157.8	155.9	154.3	152.1	150.8	152.0	32.6	241.2
40,0°	185.7	181.5	176.5	172.6	168.7	165.3	163.3	161.4	159.8	158.8	159.4	35.4	276.7
42,5°	193.6	188.5	185.1	180.2	176.1	172.4	170.4	169.0	167.7	167.1	167.0	38.3	315.0
45,0°	200.4	194.5	191.9	186.5	182.4	178.5	176.3	175.0	173.8	173.2	172.7	41.1	356.1
47,5°	205.3	199.5	194.5	190.9	185.5	182.2	179.7	176.1	172.4	170.3	168.9	43.6	399.7
50,0°	208.4	201.3	194.6	191.6	184.2	173.6	162.9	154.0	148.2	146.2	145.4	44.8	444.5
52,5°	206.4	199.4	191.9	178.7	162.3	145.0	134.4	128.6	126.0	125.2	126.9	45.3	489.8
55,0°	200.5	191.0	170.8	149.3	134.4	119.4	111.2	108.0	106.6	106.9	113.6	45.5	535.3
57,5°	187.9	163.3	140.7	121.7	106.4	96.3	91.1	91.9	92.2	90.7	95.9	46.2	581.5
60,0°	156.2	131.6	111.6	93.4	83.4	80.7	81.0	81.4	81.8	83.6	91.0	54.7	636.2
62,5°	122.4	100.3	81.4	71.0	71.2	74.7	75.5	76.2	75.9	78.9	84.8	71.9	708.1
65,0°	91.4	71.9	62.2	62.1	67.3	71.5	71.2	69.9	68.0	76.5	82.1	98.8	806.9
67,5°	61.6	55.3	53.3	60.0	66.6	67.6	64.6	59.9	41.5	39.8	50.4	92.9	899.8
70,0°	41.4	43.0	52.6	58.9	58.4	53.9	42.9	19.0	17.9	28.3	40.2	49.4	949.3
72,5°	31.6	38.8	44.5	44.5	38.5	31.6	16.1	14.2	13.4	20.8	26.1	24.8	974.0
75,0°	25.4	29.3	31.2	27.4	22.3	15.1	12.2	10.5	9.6	12.1	13.2	14.0	988.0
77,5°	11.8	16.6	15.7	12.8	11.4	9.8	8.8	7.0	5.7	5.6	6.5	7.1	995.1
80,0°	5.8	6.3	6.9	6.8	6.3	5.8	5.2	4.0	2.9	1.7	1.4	3.1	998.2
82,5°	3.0	3.3	3.5	3.5	3.8	3.3	2.9	2.2	1.7	1.3	1.1	1.2	999.4
85,0°	1.3	1.4	1.5	1.5	1.5	1.5	1.4	1.3	1.1	1.0	1.0	0.4	999.8
87,5°	0.8	0.8	0.9	0.9	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
---------------------------------------	--	--------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1510	10.3	10.6	10.4
95	240	252	1435	9.8	10.0	9.9
90	226	250	1360	9.2	9.5	9.4
85	212	247	1283	8.7	8.9	8.8
80	198	245	1205	8.1	8.4	8.2
75	185	242	1133	7.7	7.8	7.8
70	172	240	1059	7.1	7.4	7.2
65	158	237	979	6.7	6.9	6.8
60	145	233	904	6.2	6.4	6.3
55	132	230	828	5.8	5.9	5.8
50	120	227	757	5.3	5.5	5.4
45	107	222	680	4.9	5.0	5.0
40	94	218	601	4.4	4.6	4.5
35	82	213	528	4.1	4.2	4.2
31	73	208	473	3.8	3.9	3.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1530	10.4	10.7	10.6
95	240	252	1454	9.9	10.2	10.0
90	226	250	1376	9.4	9.6	9.5
85	212	247	1299	8.8	9.1	9.0
80	199	245	1225	8.3	8.5	8.4
75	185	242	1146	7.8	7.9	7.8
70	172	240	1071	7.3	7.5	7.4
65	159	237	996	6.8	7.0	6.9
60	146	234	920	6.4	6.5	6.4
55	133	230	843	5.9	6.0	6.0
50	120	227	766	5.4	5.6	5.5
45	107	222	686	5.0	5.1	5.0
40	95	218	614	4.6	4.7	4.6
35	82	213	533	4.2	4.2	4.2
31	73	208	477	3.9	3.9	3.9

Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
---------------------------------------	--	--------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1520	10.3	10.7	10.5
95	240	252	1444	9.9	10.1	10.0
90	226	250	1368	9.3	9.5	9.4
85	212	247	1291	8.7	9.0	8.8
80	199	245	1218	8.3	8.4	8.4
75	185	242	1139	7.7	7.9	7.8
70	172	240	1065	7.2	7.4	7.3
65	159	237	990	6.8	6.9	6.8
60	146	234	914	6.3	6.5	6.4
55	133	230	838	5.8	6.0	5.9
50	120	227	761	5.4	5.5	5.4
45	107	222	683	5.0	5.0	5.0
40	95	218	610	4.5	4.6	4.6
35	82	213	530	4.1	4.2	4.2
31	73	208	475	3.8	3.9	3.8

Photometric test report

Family Streetlight 31 micro	Order number: 5XH114AA08CA EAN: 4069025510440	LP number 59800_2623
---------------------------------------	--	--------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	1510.0	10.3
5.0	1530.0	10.4
15.0	1520.0	10.3